



Worry-Free 120V AC Wire-in Smoke Alarm Sealed Lithium Battery Backup

Model i12010S-CA

- Ionization Sensing Technology
- Sealed-In 10-Year* Lithium Battery Backup
- Hush® Button
- Alarm Memory Indicator
- 360° Mounting Plate with Tamper Resistance
- 2 LED Indicators



Description

The Kidde i12010S is an AC/DC powered, ionization smoke alarm that operates on a 120V power source with sealed-in lithium battery backup. This alarm uses ionization sensing technology. Ionization sensing alarms may detect invisible fire particles (associated with flaming fires) sooner than photoelectric alarms. Photoelectric sensing alarms may detect visible particles (associated with smoldering fires) sooner than ionization alarms.

Leading authorities recommend that both ionization and photoelectric smoke alarms be installed to help insure maximum detection of the various types of fires that can occur within the home.

The i12010S contains a 10-year tamper proof battery that eliminates the need for battery replacement, and ends worry over unauthorized battery removal. The alarm provides continuous protection from smoke and fire, even during power outages. At the end of alarm life, the unit will chirp, indicating the alarm is in need of replacement. The customer can use a simple tool such as a screwdriver to deactivate the unit, stopping the chirp and making it safe for disposal. The end of life signal can be temporarily silenced to allow for replacement at a more convenient time.

Install Confidence:

Easy Installation

- Battery backup automatically activates when the alarm is attached to mounting bracket
- Large mounting base makes mounting easier, protects surface paint from dirt and covers imperfections.
- Pre-stripped wiring harness with easy off cap does not require stripper tool. Tinned strands increase conductivity and wire nut grip.

Fewer Callbacks

- 10-year sealed battery substitutes need for routine 9V replacement
- Large centrally located Test/Hush® alarm control button silences nuisance alarms for approximately 9 minutes.
- Dust cover protects sensor from contaminants during construction, reducing nuisance alarms.

User-Friendly Features

- Red LED indicates alarm mode, Green LED indicates AC power is present.
- Interconnectable with up to 24 devices (of which 18 can be initiating) including smoke, CO and heat alarms. See user guide for complete instructions.
- End of Life Hush feature allows user to temporarily silence end of life chirp 3 days at a time for a maximum of 30 day life extension.





Worry-Free 120V AC Wire-In Smoke Alarm Sealed Lithium Battery Backup

Model i12010S

Architectural and Engineering Specifications

The smoke alarm shall be Kidde Model i12010S or approved equal. It shall be powered by a 120VAC, 60Hz source along with a 3V sealed lithium battery backup. The unit shall incorporate an ionization sensor with nominal sensitivity of 0.50 to 1.04%/ft. The temperature operating range shall be between 40°and 100°F (4°C and 38°C) and the humidity operating range shall be up 95% relative humidity, non-condensing.

The smoke alarm can be installed on any standard single gang electrical box, up to a 4" octagon junction box. The electrical connection (to the alarm) shall be made with a plug-in connector. A maximum of 24 Kidde devices can be interconnected in a multiple station arrangement. The interconnect system must not exceed the NFPA (National Fire Protection Association) limit of 18 initiating devices, of which 12 can be smoke alarms. With 18 initiating devices (Smoke, heat, CO, etc), interconnected, it is still possible to interconnect 6 strobe lights and/or relay modules. The alarm shall provide optional tamper resistance that deters removal of the unit from the wall or ceiling. No additional pieces shall be required to activate this feature.

The alarm shall include a test button that will electronically simulate the presence of smoke and cause the unit to go into alarm. This sequence tests the unit's electronics, battery and horn to ensure proper operation.


The unit shall include a piezoelectric horn that is rated at 85 decibels at 10 feet. The unit shall include the Smart Hush™ feature that silences the unit for approximately 9 minutes if a nuisance condition occurs.

The unit shall indicate a low battery condition with a brief alarm chirp and red LED flash once every 60 seconds. In standby condition, the green LED will be constantly on when powered by AC, and flash every 60 seconds when powered by only battery backup. The green LED will also flash every 2 seconds when in Hush mode, and every 16 seconds in Memory Condition.

The smoke alarm shall include an End of Life Alert, where ten years after initial power-up the unit shall chirp two times every 30 seconds to indicate the alarm needs to be replaced. The End of Life signal can be silenced three days at a time for a maximum of 30 days. The unit shall have a deactivation switch to disable it and make it safe for disposal. The unit shall at a minimum meet the requirements of UL217, NFPA72, and (chapter 11), The State of California Fire Marshall, NFPA101 (One and two family dwellings), Federal Housing Authority (FHA), Housing and Urban Development (HUD). It shall also include a 10-year manufacturer's limited warranty.


Installation of Smoke Alarm

The smoke alarm should be installed to comply with all local codes having jurisdiction in your area, Article 760 of the National Electric Code, and NFPA 72. Make certain all alarms are wired to a single, continuous (non-switched) power line, which is not protected by a ground fault interrupter. A maximum of 1000 ft. of wire can be used in the interconnect system. Use standard UL listed household wire as required by code.

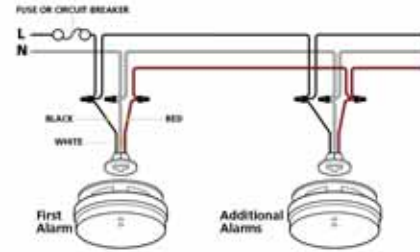

Technical Specifications

- Model: i12010S
- Power Source: 120VAC (60 Hz, 45mA Max)
- Sensor: Ionization
- Audio Alarm: 85dB at 10ft
- Temperature Range: 40°F (4.4°C) to 100°F (37.8°C)
- Humidity Range: Up to 95% relative humidity (RH), non-condensing
- Size: 5.5" in diameter x 1.75" depth
- Weight: .45lbs
- Interconnects: Up to 24 Kidde devices
- Warranty: 10 year limited

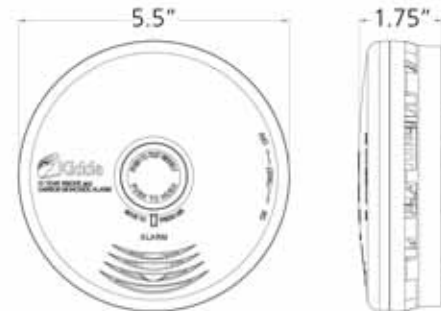

Ordering Number	UPC	I2F5	Pack Config.	Pack Quantity	Dimensions (w x d x h Inches)	Weight	Cartons/Pallet
21010407	0-47871-10407-9	100-47871-10407-6	BOX	Master Pack (6 Units)	6.0 x 13.0 x 6.0	2.7	126



Worry-Free AC Wire-in Combination Smoke & Carbon Monoxide (CO) Alarm Sealed Lithium Battery Backup

Model i12010SCO-CA

Sealed 3V Lithium Battery Backup

10-year* tamper proof battery eliminates need for battery replacement.

Alerts user to replace alarm after 10 years of operation.

Voice Warning

Warns of hazard by announcing "Fire!" or "Warning, Carbon Monoxide."

Intelligent Sensor Technology

Reduces nuisance alarms and offers fast response to real fires.

Test/Hush Button Functions

A single button that tests alarm circuitry and temporarily silences nuisance alarms.

Two LED Display

Red LED indicates alarm mode, Green LED indicates AC power is present

Peak Level Memory

Alerts user when the unit has detected CO concentrations of 100ppm or higher.



Description

The Kidde i12010S is an AC/DC powered, ionization smoke alarm that operates on a 120V power source with sealed-in lithium battery backup. This alarm uses ionization sensing technology. Ionization sensing alarms may detect invisible fire particles (associated with flaming fires) sooner than photoelectric alarms. Photoelectric sensing alarms may detect visible particles (associated with smoldering fires) sooner than ionization alarms.

Leading authorities recommend that both ionization and photoelectric smoke alarms be installed to help insure maximum detection of the various types of fires that can occur within the home.

The i12010S contains a 10-year tamper proof battery that eliminates the need for battery replacement, and ends worry over unauthorized battery removal. The alarm provides continuous protection from smoke and fire, even during power outages. At the end of alarm life, the unit will chirp, indicating the alarm is in need of replacement. The customer can use a simple tool such as a screwdriver to deactivate the unit, stopping the chirp and making it safe for disposal. The end of life signal can be temporarily silenced to allow for replacement at a more convenient time.

Install Confidence:

Easy Installation

- Battery backup automatically activates when the alarm is attached to mounting bracket
- Large mounting base makes mounting easier, protects surface paint from dirt and covers imperfections.
- Pre-stripped wiring harness with easy off cap does not require stripper tool. Tinned strands increase conductivity and wire nut grip.

Fewer Callbacks

- 10-year sealed battery substitutes need for routine 9V replacement
- Large centrally located Test/Hush® alarm control button silences nuisance alarms for approximately 9 minutes.
- Dust cover protects sensor from contaminants during construction, reducing nuisance alarms.

User-Friendly Features

- Red LED indicates alarm mode, Green LED indicates AC power is present.
- Interconnectable with up to 24 devices (of which 18 can be initiating) including smoke, CO and heat alarms. See user guide for complete instructions.
- End of Life Hush feature allows user to temporarily silence end of life chirp 3 days at a time for a maximum of 30 day life extension.






Worry-Free AC Wire-in Combination Smoke & Carbon Monoxide (CO) Alarm Sealed Lithium Battery Backup

Architectural and Engineering Specifications

The combination smoke and carbon monoxide alarm shall be Kidde model i12010SCO or approved equal. It shall be powered by 120VAC, 60Hz source with on 3V sealed lithium battery backup. The temperature operating range shall be between 40°F and 100°F (4°C and 38°C) and the humidity operating range shall be 10% - 95% relative humidity, non-condensing. The unit shall incorporate an ionization smoke sensor with nominal sensitivity of 0.50-1.22%/ft. The CO sensor shall be of a fuel cell design and shall meet the sensitivity requirements of Underwriters Laboratories UL2034 Single and Multiple Station Carbon Monoxide Detectors. The combination alarm can be installed on the surface of any wall or ceiling following the UL/NFPA/Manufacturer's recommended placement guidelines. The alarm can be installed on any standard single gang electrical box, up to a 4" octagon junction box. The electrical connection (to the alarm) shall be made with a plug-in connector. The unit shall provide optional tamper resistance that deters removal of the unit from the wall or ceiling. No additional pieces shall be required to activate this feature. A maximum of 24 Kidde devices can be interconnected in a multiple station arrangement. The interconnect system must not exceed the NFPA (National Fire Protection Association) limit of 18 initiating devices, of which 12 can be smoke alarms. With 18 initiating devices (smoke, heat, CO, etc), interconnected, it is still possible to interconnect 6 strobe lights and or relay modules. The alarm shall include a test button that will electronically simulate the presence of smoke and CO and cause the unit to go into both modes of alarm. This sequence tests the unit's electronics to ensure proper operation. The CO sensor will not alarm to levels of CO below 30 ppm and will alarm in the following time range when exposed to the corresponding levels of CO. 70 ppm CO Concentration 60 – 240 minutes 150 ppm CO Concentration 10 – 50 minutes 400 ppm CO Concentration 4 – 15 minutes The combination alarm shall have two methods of warning for danger: a piezoelectric horn that is rated at 85 decibels at 10 feet and a voice warning that identifies the danger. For a CO incident, the horn will sound in the repetitive manner – four (4) fast beeps, a short pause, four (4) fast beeps, a short pause. In between, the unit will announce "Warning Carbon Monoxide!" In a Smoke incident, the horn will sound in the repetitive manner – three (3) beeps, a pause, three (3) beeps, a pause. In between, the unit will announce "Fire!" The unit shall incorporate 2 LED's. A green LED will be steady on when AC power is present, flash every 60 seconds when in the battery only mode, every second to indicate alarm memory, and every 2 seconds to indicate the Hush™ mode is active. A red LED will flash in unison with the sounder pattern. The unit shall include the Hush™ feature that silences the unit for approximately 9 minutes if a nuisance alarm condition occurs. The Green LED on the alarm will flash every 2 seconds while in Hush™ and will automatically reset itself. It also provides voice annunciation of "Hush Mode Activated" when Hush™ is activated and "Hush Mode Cancelled" when the Hush cycle ends. The unit shall also indicate a low battery warning utilizing each of the following methods: a brief alarm chirp, the voice announcement of "Low Battery!" The unit shall at a minimum meet the requirements of UL 2034, UL217, NFPA72, (chapter 11 2002 edition) The State of California Fire Marshall, NFPA101 (One and two family dwellings) Federal Housing Authority (FHA), Housing and Urban Development (HUD). It shall also include a 10-year manufacturer's limited warranty.


Installation of Smoke Alarm

The combination alarm should be installed to comply with all local codes having jurisdiction in your area, Article 760 of the National Electric Code, and NFPA 72. Make certain all alarms are wired to a single, continuous (non-switched) power line, which is not protected by a ground fault interrupter. A maximum of 1000 ft. of wire can be used in the interconnect system. Use standard UL listed household wire (18 gauge or larger as required by local codes).

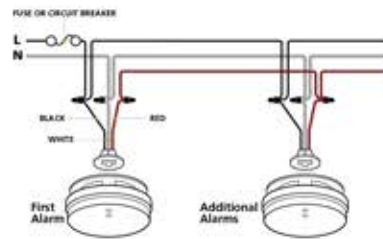

Technical Specifications

- Power Source: 120VAC, 60Hz 45mA max per alarm
Sealed lithium battery backup
- Smoke Sensor: Ionization
- CO Sensor: Electrochemical
- Audio Alarm: 85dB at 10ft
- Temperature Range: 40°F (4.4°C) to 100°F (37.8°C)
- Humidity Range: 10%-95% relative humidity, non-condensing
- Size: 5.5" in diameter x 1.75" depth
- Weight: 1lb
- Wiring: Quick connect plug with 6" pigtails
- Interconnects: Up to 24 Kidde devices (of which 18 can be initiating)
- Warranty: Ten year limited

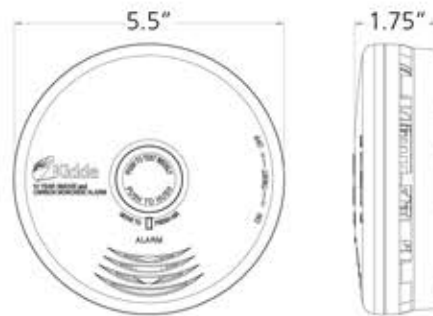

Ordering Number	UPC	12F5	Pack Config.	Pack Quantity	Dimensions (w x d x h inches)	Weight	Cartons/Pallet
21010408	0-47871-10408-6	100-47871-10408-3	BOX	Master Pack (6 Units)	6.0 x 13.0 x 6.0	2.7	126