



National Fire Equipment Ltd.

CS SURFACE FIRE HOSE CABINETS



Surface Cabinet Model CS-800

(DEPICTED IN OPTIONAL RED FINISH)

Specifications:

Surface mounted cabinets shall be NFE CS-_____, ___"x___"x___" with 18 gauge (1.19mm) baked grey enamel corrosion protected steel tubs. 14 Gauge (2mm) grey baked enamel corrosion protected steel door & frame with hollow channel reinforcement. The frame section can be site adjusted for left or right door swing. Complete with full-length semi-concealed piano hinges, Model SMSS flush stainless steel door catch, and full panel of 1/4" duolite safety glass.

SERIES CS SURFACE CABINETS

Contain the same accessories and are similar to recessed cabinets expect that there is no trim or adjustment to the cabinet. The outer edges of the frame are turned back to over lap the tub exterior, thereby adding rigidity to the assembly and eliminating sharp corners.


The frame section can be removed and adjusted for left or right door swing. All edges are ground and rounded for safety.

Recommended use of plexi, wired or duo-lite safety glass in parking areas and mechanical rooms.


ALL INTERIOR COMPONENTS ARE EXTRA AND MUST BE ORDERD SPERATELY

WARNING: Standard baked enamel cabinets are not designed for outdoor applications.


Depending on environment use epoxy coatings, galvanized, stainless steel or fiberglass materials. Contact our customers service representatives for assistance.

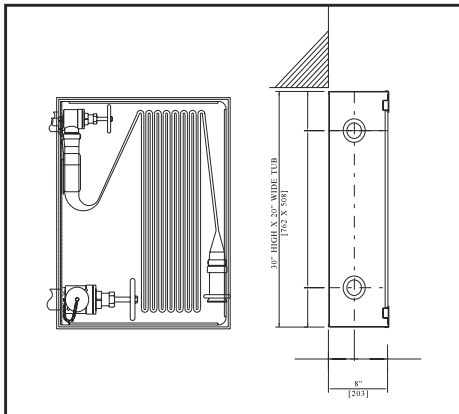

CS-200
(Double Valve)

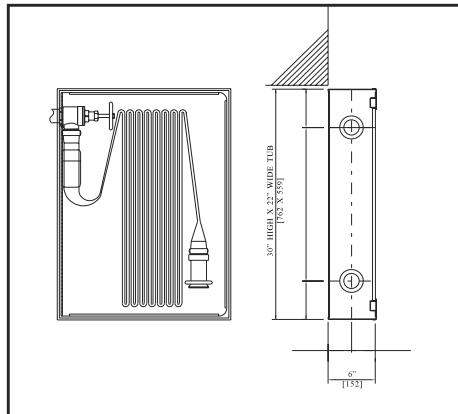

CS-400
(Single Valve)

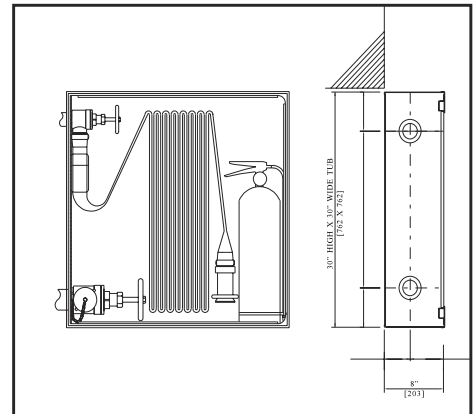

CS-800
(Double Valve with Extinguisher)

Model	Tub Dimensions	Mounting Type	Fire Extinguisher Maximum	Valves
CS-200	20" x 30" x 8" (508mm x 762mm x 203mm)	Surface	No	1½" & 2½"
CS-400	22" x 30" x 6" (559mm x 762mm x 152mm)	Surface	No	1½" Only
CS-800	30" x 30" x 8" (762mm x 762mm x 203mm)	Surface	20 lbs. Dry Chem.	1½" & 2½"
CS-800-6	30" x 30" x 6" (762mm x 762mm x 152mm)	Surface	10 lbs. Dry Chem.	1½" Only