



National Fire Equipment Ltd.

2 Way Fire Hydrant

Without Valves




With Valves




Body material: Cast Iron to BS 1452
Outlet: Copper alloy BS 1400
Test pressure: 20 Bar (300 psi)
Working pressure: 10 Bar (150 psi)
Finishing: Red or Yellow

Code No.	Outlet	Inlet
HYD059-CI-100	2 x (2-1/2") Male Thread	4" Table E BS 10 Flange
HYD060-CI-100	2 x 2-1/2" Control Valve with Female BS Instantaneous Outlet	6" Table E BS 10 Flange

Model HYD059-CI-100 can be fitted with an underground 4" gate valve with spindle cap and operated by using a hydrant key and bar

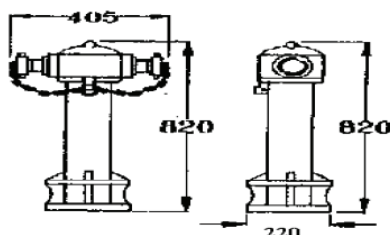

Hydrant

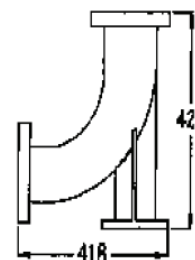

Duck Foot Bend



**National Fire
Equipment Ltd.**

TORONTO: (905) 761-6355
Toll Free: (800) 267-8508

OTTAWA: (613) 723-6071

VANCOUVER: (604) 420-1131
Toll Free: (800)-667-2138

BURNABY: (604)-299-4498

EDMONTON: (780) 455-3870
Toll Free: (888)-891-1008

CALGARY: (403) 236-5661

MONCTON: (506) 859-7277
Toll Free: (877) 816-3473

MISSISSAUGA: (905) 565-1385

www.nationalfire.com



National Fire Equipment Ltd.

3 Way Fire Hydrant

Without Valves



HYD061-CI-150-RD

With Valves




HYD055-CI-150-RD

Body material:
Outlet:
Test pressure:
Working pressure:
Finishing:

Cast Iron to BS 1452
Copper alloy BS 1400
300 psi
150 psi
Red

Code No.	Outlet	Inlet
HYD061-CI-150-RD	2 x (2-1/2") Male Thread 1 x 4" Male Thread	6" Table E BS 10 Flange
HYD055-CI-150-RD	2 x 2-1/2" Control Valve with Female BS Instantaneous Outlet, 1 x 4" Male Thread	6" Table E BS 10 Flange

Model HYD061-CI-150-RD can be fitted with an underground 6" gate valve with spindle cap and operated by using a hydrant key and bar.

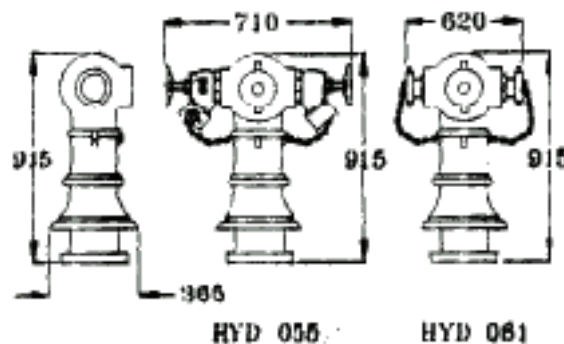

**National Fire
Equipment Ltd.**

TORONTO: (905) 761-6355
Toll Free: (800) 267-8508

OTTAWA: (613) 723-6071

VANCOUVER: (604) 420-1131
Toll Free: (800)-667-2138

BURNABY: (604)-299-4498

EDMONTON: (780) 455-3870
Toll Free: (888)-891-1008

CALGARY: (403) 236-5661

MONCTON: (506) 859-7277
Toll Free: (877) 816-3473

MISSISSAUGA: (905) 565-1385

www.nationalfire.com



National Fire Equipment Ltd.

Dry & Wet Riser Equipment



DRS095-CI-002-RD



WRS115-CI-004-RD

Specification

Body: Spheroidal Graphite Iron to BS 2789 or Cast Iron BS 1452


Inlet: BS Instantaneous Male Copper Alloy to BS 1400

Outlet: 2 Way Breeching Inlet Flanged 4" table E. BS 10.


4 Way Breeching Inlet Flanged 6" table E. BS 10.

Test pressure: 20 bar (300 psi) Working pressure: 10 bar (150 psi)

Code No.	Description
DRS095-CI-002-RD	2-way breeching inlet
WRS115-CI-004-RD	4-way breeching inlet

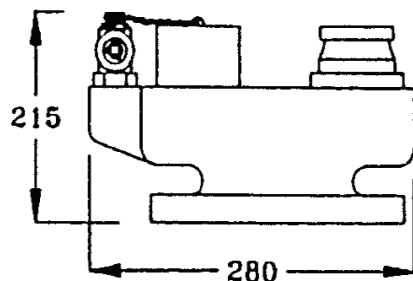

2 Way Breeching Inlet

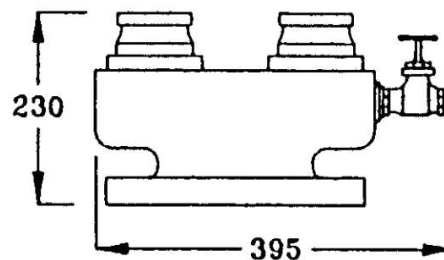

4 Way Breeching Inlet



**National Fire
Equipment Ltd.**

TORONTO: (905) 761-6355
Toll Free: (800) 267-8508

OTTAWA: (613) 723-6071

VANCOUVER: (604) 420-1131
Toll Free: (800)-667-2138

BURNABY: (604)-299-4498

EDMONTON: (780) 455-3870
Toll Free: (888)-891-1008

CALGARY: (403) 236-5661

MONCTON: (506) 859-7277
Toll Free: (877) 816-3473

MISSISSAUGA: (905) 565-1385

www.nationalfire.com