



National Fire Equipment Ltd.

Adjustable Swivel Ring Hangers



FUNCTION: Designed for the suspension of non-insulated stationary pipe lines. The knurled insert nut that allows a vertical adjustment after installation, is tapped to NFPA reduced rod size standards. Captured knurled insert nut present on pipe sizes 1/2" (15mm) to 2" (50mm). The capture is permanent in the bottom portion of the band, allowing the hanger to be opened during installation if desired, but preventing the knurled insert nut from falling completely out. Fig. 141F has a layer of felt which separates the pipe from the hanger to reduce vibration and sound.

APPROVALS: Underwriters' Laboratories Listed in the U.S. (UL), Canada (CUL), for use with standard steel pipe sizes 3/4" (20mm) to 8" (200mm) and CPVC pipe sizes 3/4" (20mm) to 4" (100mm). Factory Mutual Approved for sizes 3/4" (20mm) to 8" (200mm). Complies with Federal Specifications A-A-1192A (Type 10), and Manufacturers' Standardization Society ANSI/SP-69 and SP-58 (Type 10).


ORDERING: Specify pipe size and figure number.

Pipe Size	Rod Size	B	Adj. C	D	E	Max. Rec. Load		Wt. Each	
						lbs.	kN	lbs.	kg
1/2 (15)	3/8	1 7/8 (47.63)	1 7/16 (36.51)	2 3/4 (69.85)	3 1/16 (77.79)	300	(1.33)	.10	(.05)
3/4 (20)	3/8	1 11/16 (42.86)	1 1/8 (28.58)	2 1/2 (63.50)	3 1/16 (77.79)	300	(1.33)	.10	(.05)
1 (25)	3/8	1 5/8 (41.28)	1 (25.40)	2 1/2 (63.50)	3 3/16 (80.96)	300	(1.33)	.10	(.05)
1 1/4 (32)	3/8	1 15/16 (49.21)	1 1/16 (26.99)	2 13/16 (71.44)	3 9/16 (90.49)	300	(1.33)	.11	(.05)
1 1/2 (40)	3/8	2 1/8 (53.98)	1 1/16 (26.99)	3 1/8 (79.38)	3 7/8 (98.43)	300	(1.33)	.11	(.05)
2 (50)	3/8	2 7/16 (61.91)	1 1/8 (28.58)	3 5/16 (84.14)	4 3/8 (111.13)	300	(1.33)	.14	(.06)
2 1/2 (65)	3/8	3 1/16 (77.79)	1 5/8 (41.28)	3 15/16 (100.01)	5 3/8 (136.53)	525	(2.34)	.19	(.09)
3 (80)	3/8	3 11/16 (93.66)	1 7/8 (47.63)	4 9/16 (115.89)	6 5/16 (160.34)	525	(2.34)	.23	(.10)
3 1/2 (90)	3/8	3 3/4 (95.25)	1 7/8 (47.63)	4 5/8 (117.48)	6 5/8 (168.28)	525	(2.34)	.25	(.11)
4 (100)	3/8	4 3/16 (106.36)	1 7/8 (47.63)	5 1/16 (128.59)	7 5/16 (185.74)	650	(2.89)	.30	(.14)
5 (125)	1/2	4 5/8 (117.48)	1 5/8 (41.28)	5 5/8 (142.88)	8 3/8 (212.73)	1000	(4.45)	.50	(.23)
6 (150)	1/2	5 5/8 (142.88)	2 1/4 (57.15)	6 1/2 (165.10)	9 13/16 (249.24)	1000	(4.45)	.58	(.26)
8 (200)	1/2	6 13/16 (173.04)	2 7/16 (61.91)	7 15/16 (201.61)	12 1/4 (311.15)	1000	(4.45)	.90	(.41)

Note: If ordering Fig. 141F felt lined hangers for pipe sizes of 3 1/2" (90mm) or under, order the next largest size to allow for the thickness of the felt lining.

Fig. 141 & 141F NFPA SWIVEL RING HANGER

Fig. 141 PRE-GALVANIZED
Fig. 141F PRE-GALVANIZED
WITH FELT LINING

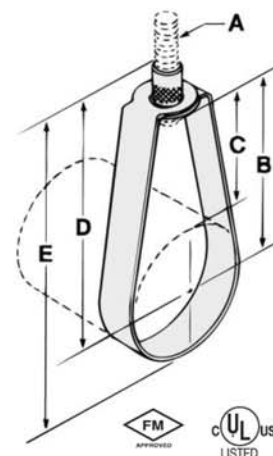

MATERIAL: Low carbon steel
Metric knurl insert nuts
available upon request

FUNCTION: Designed for the suspension of non-insulated stationary pipe lines. The knurled insert nut, allows for vertical adjustment after installation. Fig. 151F has a layer of felt which separates the pipe from the hanger to reduce vibration and sound.

APPROVALS: Underwriters' Laboratories Listed in the U.S. (UL) and Factory Mutual Approved for all sizes. Complies with Federal Specification A-A-1192A (Type 10), and Manufacturers' Standardization Society ANSI/SP-69 and SP-58 (Type 10).


ORDERING: Specify pipe size and figure number. **MATERIAL:** Low carbon steel

Pipe Size	Rod Size	B	Adj. C	D	E	Max. Rec. Load		Wt. Each	
						lbs.	kN	lbs.	kg
2 1/2 (65)	1/2	2 3/4 (69.85)	1 1/4 (31.75)	3 11/16 (93.66)	5 1/8 (130.18)	600	(2.67)	.33	(.15)
3 (80)	1/2	3 1/8 (79.38)	1 1/8 (28.58)	4 (101.60)	5 7/8 (149.23)	600	(2.67)	.35	(.16)
3 1/2 (90)	1/2	3 5/8 (92.08)	1 1/2 (38.10)	4 5/16 (109.54)	6 5/8 (168.28)	600	(2.67)	.37	(.17)
4 (100)	5/8	3 7/8 (98.43)	1 1/4 (31.75)	4 15/16 (125.41)	7 1/8 (180.98)	1000	(4.45)	.48	(.22)
5 (125)	5/8	3 3/8 (85.73)	1 3/8 (34.93)	5 5/8 (142.88)	8 1/2 (215.90)	1000	(4.45)	.57	(.26)
6 (150)	3/4	5 5/16 (134.94)	2 (50.80)	6 11/16 (169.86)	10 1/8 (257.18)	1250	(5.56)	1.06	(.48)
8 (200)	3/4	6 15/16 (176.21)	2 5/8 (66.68)	8 5/16 (211.14)	12 7/8 (327.03)	1250	(5.56)	1.32	(.60)

Note: If ordering Fig. 151F felt lined hangers for pipe sizes of 3 1/2" (90mm) or under, order the next largest size to allow for the thickness of the felt lining.

Fig. 151 & 151F SWIVEL RING HANGER

Fig. 151 PRE-GALVANIZED
Fig. 151F PRE-GALVANIZED
WITH FELT LINING

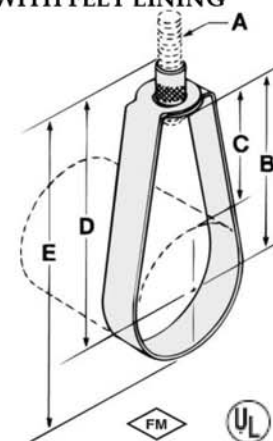

Unless otherwise specified, all dimensions on drawings and in charts are in inches and dimensions shown in parentheses are in millimeters.



**National Fire
Equipment Ltd.**

TORONTO: (905) 761-6355
Toll Free: (800) 267-8508
OTTAWA: (613) 723-6071

VANCOUVER: (604) 420-1131
Toll Free: (800)-667-2138
BURNABY: (604)-299-4498

EDMONTON: (780) 455-3870
Toll Free: (888)-891-1008
CALGARY: (403) 236-5661

MONCTON: (506) 859-7277
Toll Free: (877) 816-3473
MISSISSAUGA: (905) 565-1385

www.nationalfire.com