



National Fire Equipment Ltd.



Series 757, 757N
Double Check Valve Assemblies Sizes: 2 1/2" – 10" (65 to 250mm)

Series 757, 757N Double Check Valve Assemblies are used to prevent backflow of non-health hazard pollutants that are objectionable but not toxic, from entering the potable water supply system. Series 757, 757N may be installed under continuous pressure service and may be subjected to backpressure and backsiphonage. Series 757, 757N consists of two independently operating check valves, two shutoff valves, and four test cocks.

Features

- Extremely compact design
- 70% Lighter than traditional designs
- 304 (Schedule 40) Stainless steel housing & sleeve
- Groove fittings allow integral pipeline adjustment
- Patented tri-link check provides lowest pressure loss
- Unmatched ease of serviceability
- Available with grooved butterfly valve shutoffs
- Available for horizontal, vertical or N pattern installations
- Replaceable check disc rubber
- Sizes 2 1/2", 3" and 4" (65, 80 and 100mm) available with quarter-turn ball valve shutoffs

Specifications

The Double Check Valve Assembly shall consist of two independent tri-link check modules within a single housing, sleeve access port, four test cocks and two drip tight shut-off valves. Tri-link checks shall be removable and serviceable, without the use of special tools. The housing shall be constructed of 304 Schedule 40 stainless steel pipe with groove end connections. Tri-link checks shall have reversible elastomer discs and in operation shall produce drip tight closure against reverse flow caused by backpressure or backsiphonage. Assembly shall be a Watts Series 757, 757N.

*The wetted surface of this product contacted by consumable water contains less than 0.25% of lead by weight.



757OSY



757NBFG



757OSY
(Vertical)

NOTICE

The information contained herein is not intended to replace the full product installation and safety information available or the experience of a trained product installer. You are required to thoroughly read all installation instructions and product safety information before beginning the installation of this product.



**National Fire
Equipment Ltd.**

TORONTO: (905) 761-6355
Toll Free: (800) 267-8508
OTTAWA: (613) 723-6071

VANCOUVER: (604) 420-1131
Toll Free: (800)-667-2138
BURNABY: (604)-299-4498

EDMONTON: (780) 455-3870
Toll Free: (888)-891-1008
CALGARY: (403) 236-5661

MONCTON: (506) 859-7277
Toll Free: (877) 816-3473
MISSISSAUGA: (905) 565-1385

www.nationalfire.com

Available Models

Suffix:

- NRS – non-rising stem resilient seated gate valves
- OSY – UL/FM outside stem and yoke, resilient seated gate valves
- BFG – UL/FM grooved gear operated butterfly valves with tamper switch
- QT – 2½", 3" and 4" (65, 80 and 100mm) quarter-turn ball valves

**OSY FxG – Flanged inlet gate connection and grooved outlet gate connection

**OSY GxF – Grooved inlet gate connection and flanged outlet gate connection


**OSY GxG – Grooved inlet gate connection and grooved outlet gate connection

Available with grooved NRS gate valves - consult factory**



Post indicator plate and operating nut available - consult factory**

**Consult factory for dimensions

Dimensions — Weight

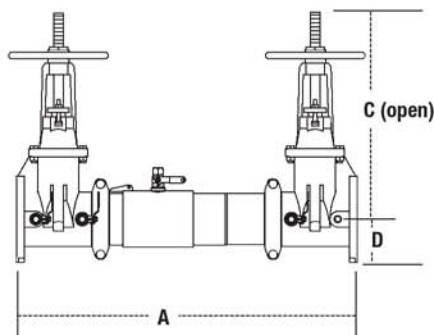


757, 757N

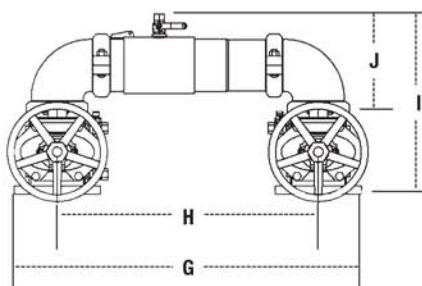


(**BFG & OSY Only)

SIZE (DN)				DIMENSIONS										WEIGHT													
		A		C (OSY)		C (NRS)		D		G		H		I		J		P		757NRS		757OSY		757N NRS		757N OSY	
in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	lbs.	kgs.	lbs.	kgs.	lbs.	kgs.	lbs.	kgs.
2½	65	30¾	781	16¾	416	9¾	238	3½	89	29¼	738	21½	546	15½	393	8½	223	9¾	234	115	52	125	57	123	56	133	60
3	80	31¾	806	18¾	479	10¼	260	3½	94	30¼	768	22¼	565	17½	435	9¾	233	10½	267	131	59	145	66	144	65	158	72
4	100	33¾	857	22¾	578	12¾	310	4	102	33	838	23½	597	18½	470	9½	252	11¾	284	161	73	161	73	184	83	184	83
6	150	43½	1105	30¾	765	16	406	5½	140	44¾	1137	33½	851	23¾	589	13½	332	15	381	273	124	295	134	314	142	336	152
8	200	49¾	1264	37¾	959	19½	506	6½	170	54¾	1375	40¾	1019	27¾	697	15½	399	17¾	437	438	199	480	218	513	233	555	252
10	250	57¾	1467	45¾	1162	23½	605	8¾	208	66	1676	49½	1257	32½	826	17¾	440	20	508	721	327	781	354	891	404	951	431

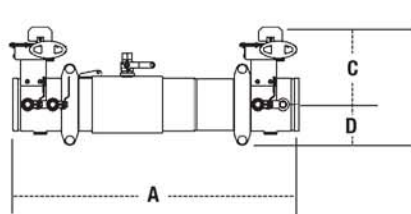


757BFG, 757NBFG

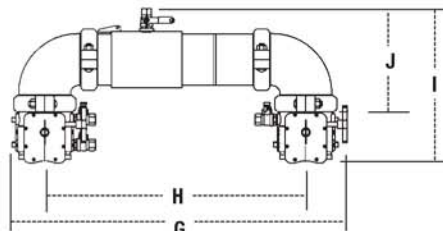

SIZE (DN)				DIMENSIONS										WEIGHT							
		A		C		D		G		H		I		J		P		757BFG		757N BFG	
in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	lbs.	kgs.	lbs.	kgs.
2½	65	27¾	705	8	203	3½	89	29⅞	759	21½	546	14⅝ ¹⁶	379	8⅜ ¹⁶	223	9	229	56	25	64	29
3	80	28¾	718	8⅝ ¹⁶	211	3⅞ ¹⁶	94	30⅞ ¹⁶	779	22¼	565	15⅞ ¹⁶	392	9⅝ ¹⁶	233	9½	241	54	24	67	30
4	100	29	737	8⅝ ¹⁶	227	3⅞ ¹⁶	94	31⅝ ¹⁶	811	23½	597	16¼	412	9⅝ ¹⁶	252	10	254	61	28	84	38
6	150	36½	927	10	254	5	127	43⅝ ¹⁶	1097	33¼	845	19⅞ ¹⁶	500	13⅝ ¹⁶	332	10½	267	117	53	157	71
8	200	42¾	1086	12¼	311	6½	165	51⅝ ¹⁶	1297	40⅞	1019	23⅝ ¹⁶	592	15⅞ ¹⁶	399	14⅝ ¹⁶	361	261	118	337	153

Noryl® is a registered trademark of SABIC Innovative Plastics Holding BV.

Dimensions — Weight continued

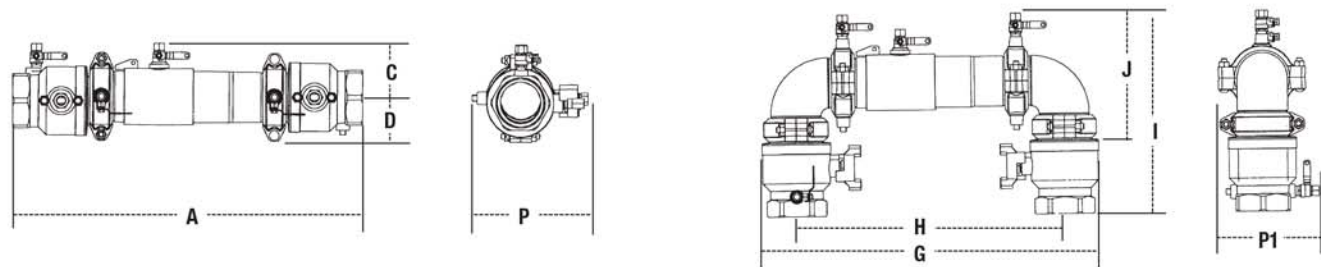

757QT

SIZE (DN)				DIMENSIONS												WEIGHT							
		A		C		D		G		H		I		J		P		P1		QT		QTN	
in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	lbs.	kgs.	lbs.	kgs.
2½	65	27¼	692	4⅞	124	6⅞	175	30¼	768	24½	622	16⅞	407	11⅜	289	11⅝	287	11⅝	287	40	18	50	23
3	80	28¼	718	4⅞	124	6⅞	175	30¼	768	24½	622	16⅞	420	11⅜	289	11⅝	287	11⅝	287	50	23	60	27
4	100	31½	800	4⅞	124	6⅞	175	30¼	768	24½	622	18⅞	465	11⅜	289	11⅝	287	11⅝	287	70	32	80	36



National Fire
Equipment Ltd.

TORONTO: (905) 761-6355
Toll Free: (800) 267-8508
OTTAWA: (613) 723-6071

VANCOUVER: (604) 420-1131
Toll Free: (800)-667-2138
BURNABY: (604)-299-4498

EDMONTON: (780) 455-3870
Toll Free: (888)-891-1008
CALGARY: (403) 236-5661

MONCTON: (506) 859-7277
Toll Free: (877) 816-3473
MISSISSAUGA: (905) 565-1385

www.nationalfire.com







Capacity

Series 757, 757N flow curves as tested by Underwriters Laboratory.
Flow characteristics collected using butterfly shutoff valves

—— Horizontal —— Vertical - - - - - N - Pattern

Flow capacity chart identifies valve performance based upon rated water velocity up to 25fps

- Service Flow is typically determined by a rated velocity of 7.5fps based upon schedule 40 pipe.
- Rated Flow identifies maximum continuous duty performance determined by AWWA.
- UL Flow Rate is 150% of Rated Flow and is not recommended for continuous duty.
- AWWA Manual M22 [Appendix C] recommends that the maximum water velocity in services be not more than 10fps.

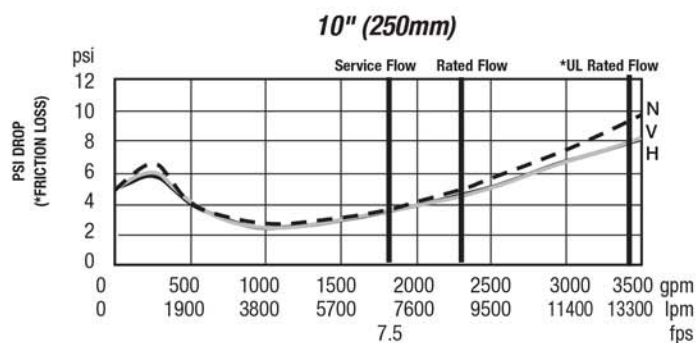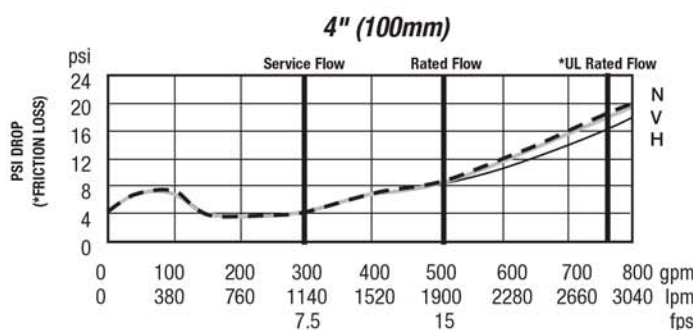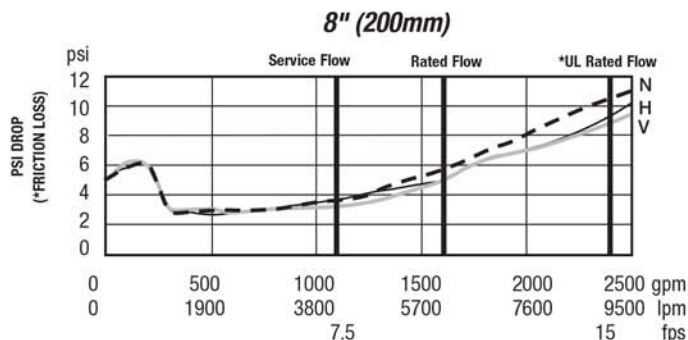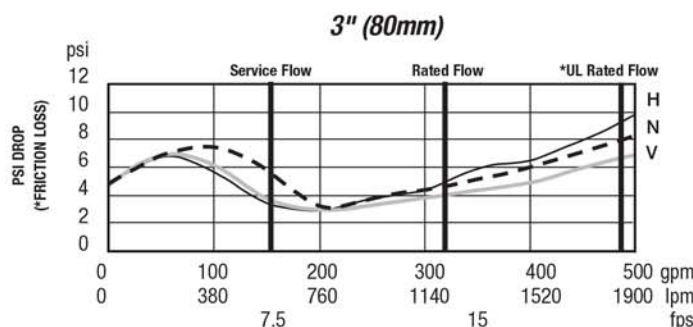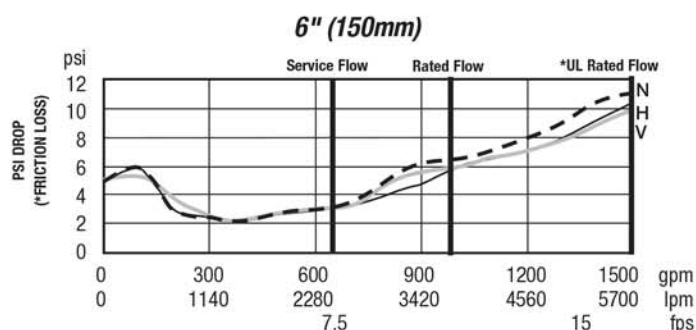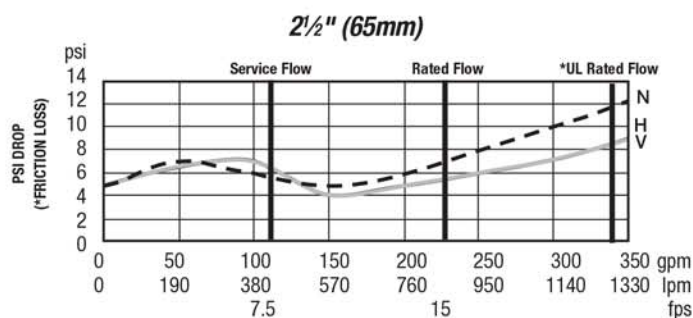

NOTICE

Inquire with governing authorities for local installation requirements



**National Fire
Equipment Ltd.**

TORONTO: (905) 761-6355

Toll Free: (800) 267-8508

OTTAWA: (613) 723-6071

VANCOUVER: (604) 420-1131

Toll Free: (800)-667-2138

BURNABY: (604)-299-4498

EDMONTON: (780) 455-3870

Toll Free: (888)-891-1008

CALGARY: (403) 236-5661

MONCTON: (506) 859-7277

Toll Free: (877) 816-3473

MISSISSAUGA: (905) 565-1385

www.nationalfire.com