



National Fire Equipment Ltd.



Lead Free Series 957, 957N, 957Z
Reduced Pressure Zone Assemblies Sizes: 2 1/2" – 10" (65 – 250 mm)

Series 957, 957N, 957Z Reduced Pressure Zone Assemblies provide protection to the potable water system from contamination in accordance with national plumbing codes. Series 957, 957N, 957Z are normally used in health hazard applications for protection against backsiphonage or backpressure.

Features

- 2 1/2", 3" and 4" (65, 80 and 100mm) sizes available with quarter-turn ball valve shutoffs
- Replaceable check disc rubber
- Extremely compact design
- 70% Lighter than traditional designs
- 304 (Schedule 40) stainless steel housing & sleeve
- Groove fittings allow integral pipeline adjustment
- Patented torsion spring checks provide lowest pressure loss
- Unmatched ease of serviceability
- Bottom mounted cast stainless steel relief valve
- Available with grooved butterfly valve shutoffs

Specifications

The Reduced Pressure Zone Assembly shall consist of two independent torsion spring check modules, a differential pressure relief valve located between and below the two modules, two drip tight shutoff valves, and required torsion spring check modules and relief valve shall be contained with a sleeve accessible single housing constructed from 304 (Schedule 40) stainless steel pipe with groove end connections. Torsion spring checks shall have replaceable elastomer discs and in operation produce drip tight closure against the reverse flow of liquid caused by backpressure or backsiphonage. Assembly shall be a Watts Regulator Company Series 957, 957N, 957Z.


NOTICE

Inquire with governing authorities for local installation requirements

*The wetted surface of this product contacted by consumable water contains less than 0.25% of lead by weight.

NOTICE

The information contained herein is not intended to replace the full product installation and safety information available or the experience of a trained product installer. You are required to thoroughly read all installation instructions and product safety information before beginning the installation of this product.

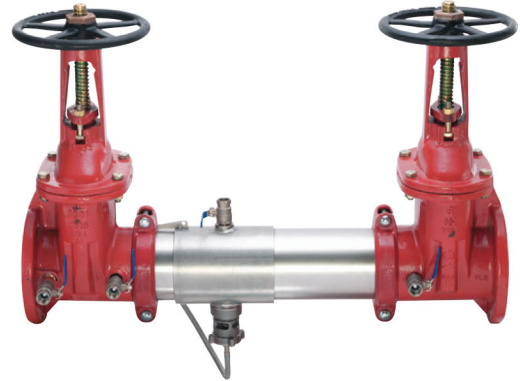

957OSY



957ZBFG



957QT



**National Fire
Equipment Ltd.**

TORONTO: (905) 761-6355
Toll Free: (800) 267-8508

OTTAWA: (613) 723-6071

VANCOUVER: (604) 420-1131
Toll Free: (800)-667-2138

BURNABY: (604)-299-4498

EDMONTON: (780) 455-3870
Toll Free: (888)-891-1008

CALGARY: (403) 236-5661

MONCTON: (506) 859-7277
Toll Free: (877) 816-3473

MISSISSAUGA: (905) 565-1385

www.nationalfire.com

Available Models

Suffix:

- NRS – non-rising stem, resilient seated gate valves
- OSY – UL/FM outside stem and yoke resilient seated gate valves
- BFG – UL/FM grooved gear operated butterfly valves with tamper switch
- QT – 2½" - 4" (65 - 100mm) quarter-turn ball valves
- **OSY FXG – Flanged inlet gate connection and grooved outlet gate connection
- **OSY Gx F – Grooved inlet gate connection and flanged outlet gate connection
- **OSY Gx G – Grooved inlet gate connection and grooved outlet gate connection

Available with grooved NRS gate valves - consult factory**


Post indicator plate and operating nut available - consult factory**

**Consult factory for dimensions

NOTICE


When installing a drain line on Series 957 backflow preventers, use 957AG air gaps. See ES-AG/EL/TC for additional information.

Dimensions – Weight

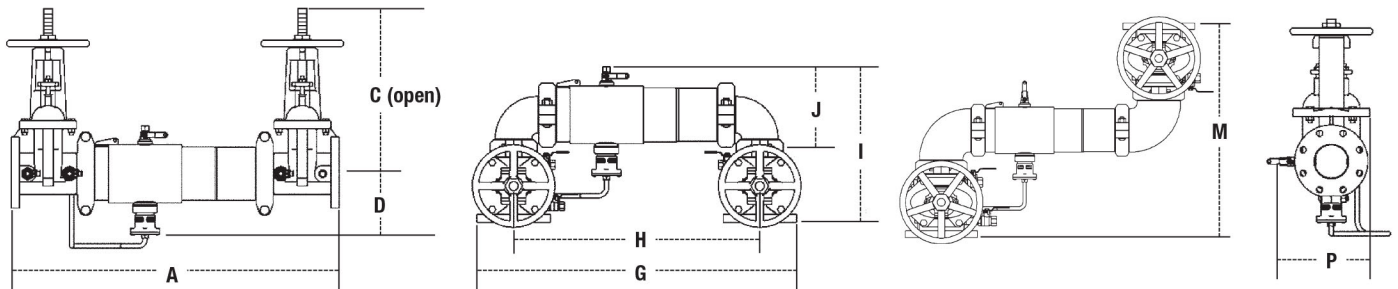

957, 957N, 957Z

SIZE (DN)		DIMENSIONS										WEIGHT																	
in.	mm	A	C (OSY)	C (NRS)	D	G	H	I	J	M	P	957NRS	957OSY	957NRS	957N OSY														
in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	lbs.	kgs.	lbs.	kgs.														
2½	65	30¾	781	16¾	416	9¾	238	6½	165	29¼	738	21½	546	15½	393	8¼	223	21¼	540	9¾	234	118	54	128	58	126	57	136	62
3	80	31¾	806	18¾	479	10¼	260	6¼	170	30¼	768	22¼	565	17¾	435	9¾	233	23	584	10½	267	134	61	148	67	147	67	161	73
4	100	33¾	857	22¼	578	12¾	310	7	178	33	838	23½	597	18½	470	9½	252	26¼	667	11¾	284	164	74	164	74	187	85	187	85
6	150	43½	1105	30¾	765	16	406	8½	216	44¾	1137	33½	851	23¾	589	13¼	332	34¼	870	15	381	276	125	298	135	317	144	339	154
8	200	49¾	1264	37¾	959	19½	506	9¼	246	54¼	1375	40¾	1019	27¼	697	15¼	399	36¾	937	17¾	437	441	200	483	219	516	234	558	253
10	250	57¾	1467	45¾	1162	23¼	605	11¾	285	66	1676	49½	1257	32¼	826	17¾	440	44½	1124	20	508	723	328	783	355	893	405	950	431

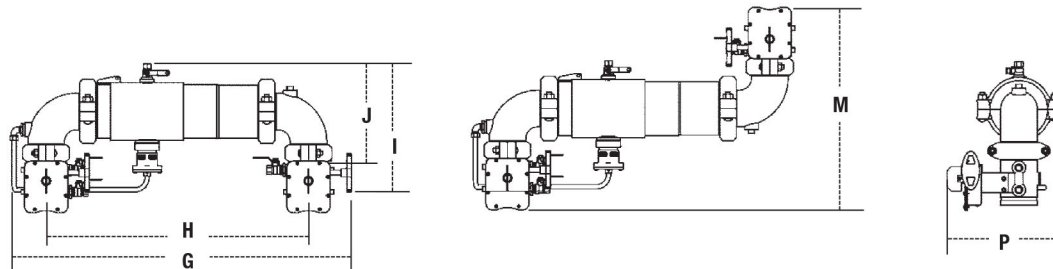

957NBFG, 957ZBFG

SIZE (DN)		DIMENSIONS						WEIGHT							
in.	mm	G	H	I	J	M	P	957N/957Z							
in.	mm	in.	mm	in.	mm	in.	mm	lbs.	kgs.						
2½	65	32½	826	23	584	15½	394	9½	241	19¾	502	11¼	300	67	30
3	80	34	864	24	610	16¾	414	10¼	256	21¼	540	12¼	308	70	32
4	100	35½	905	25½	648	17¾	437	10¾	279	23½	597	12¾	321	87	39
6	150	46½	1181	35¼	895	20½	521	13½	343	27¼	692	15	382	160	73

Noryl® is a registered trademark of SABIC Innovative Plastics Holding BV.



Approvals

- Approved by the Foundation for Cross-Connection Control and Hydraulic Research at The University of Southern California (FCCCHR-USC)
(Excluding 'N' Pattern – 10", 'Z' Pattern – 6" and 10")
- AWWA C551-92

For additional approval information please contact the factory or visit our website at www.watts.com








Dimensions – Weight continued

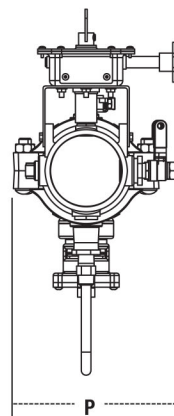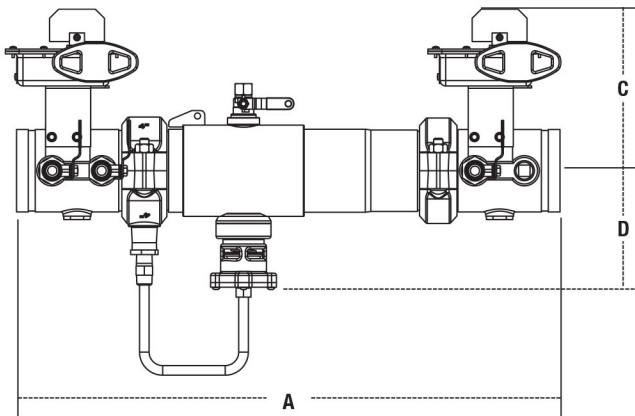


957 BFG

SIZE (DN)		DIMENSIONS								WEIGHT	
		A		C		D		P			
in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	lbs.	kgs.
4	100	29	737	7 ³ / ₄	197	6 ³ / ₈	162	9 ¹ / ₂	241	66	30
6	150	36 ¹ / ₂	927	9 ¹ / ₁₆	246	7 ¹ / ₁₆	189	14 ¹ / ₄	362	122	55



957QT

SIZE (DN)		DIMENSIONS										WEIGHT													
		A		C		D		G		H		I		J		M		P		P1		QT		QTN	
in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	lbs.	kgs.	lbs.	kgs.
2 1/2	65	27 1/2	698	4 7/8	124	6 7/8	175	30 1/4	768	21 1/2	546	16 1/16	407	11 3/8	289	19 7/8	505	11 5/16	287	11 5/16	287	46	21	57	26
3	80	28	711	4 7/8	124	6 7/8	175	30 1/4	768	22 1/4	565	16 9/16	420	11 3/8	289	20 7/8	531	11 5/16	287	11 5/16	287	56	25	67	30
4	100	28 3/4	730	4 7/8	124	6 7/8	175	30 1/4	768	23 1/2	597	18 5/16	465	11 3/8	289	24 3/8	619	11 5/16	287	11 5/16	287	76	34	87	39



TORONTO: (905) 761-6355
Toll Free: (800) 267-8508
OTTAWA: (613) 723-6071

VANCOUVER: (604) 420-1131
Toll Free: (800)-667-2138
BURNABY: (604)-299-4498

EDMONTON: (780) 455-3870
Toll Free: (888)-891-1008
CALGARY: (403) 236-5661

MONCTON: (506) 859-7277
Toll Free: (877) 816-3473
MISSISSAUGA: (905) 565-1385

www.nationalfire.com

Capacity










Series 957, 957N, 957Z flow curves as tested by Underwriters Laboratory.

Flow characteristics collected using butterfly shutoff valves

—— Horizontal —— N-Pattern - - - - Z-Pattern

Flow capacity chart identifies valve performance based upon rated water velocity up to 25fps

- Service Flow is typically determined by a rated velocity of 7.5fps based upon schedule 40 pipe.
- Rated Flow identifies maximum continuous duty performance determined by AWWA.
- UL Flow Rate is 150% of Rated Flow and is not recommended for continuous duty.
- AWWA Manual M22 [Appendix C] recommends that the maximum water velocity in services be not more than 10fps.

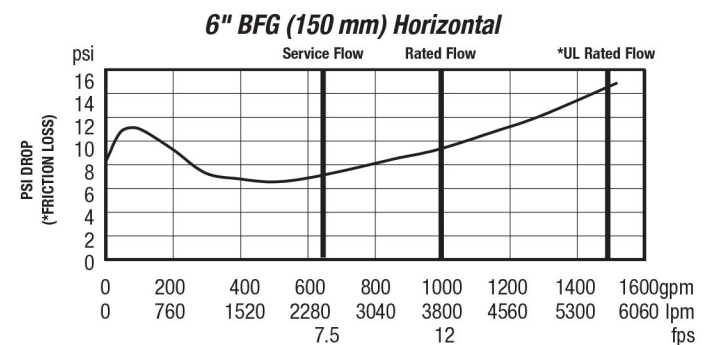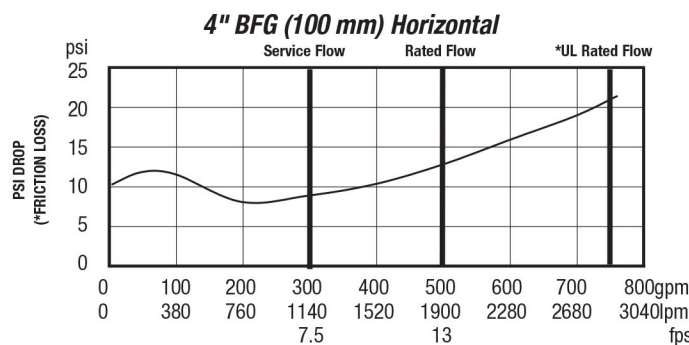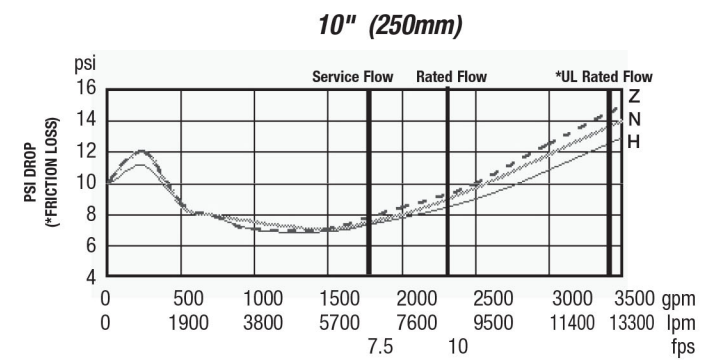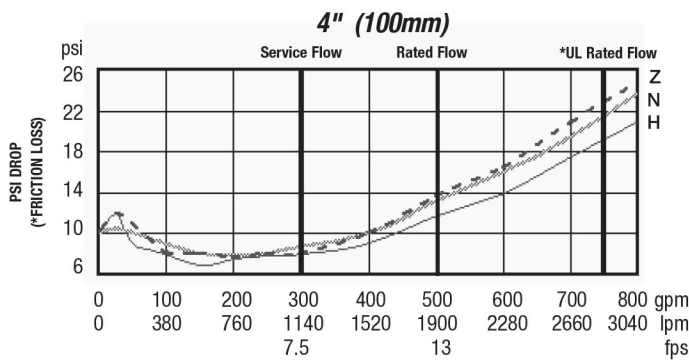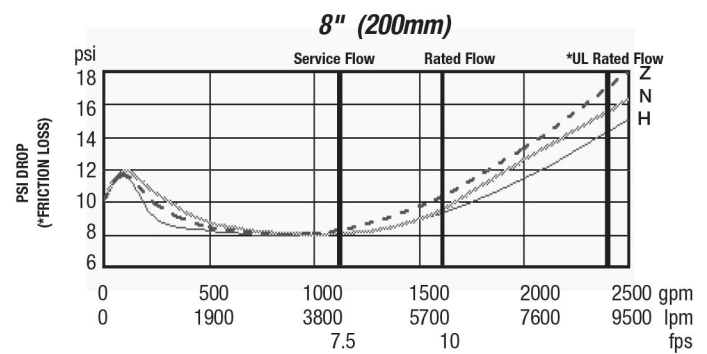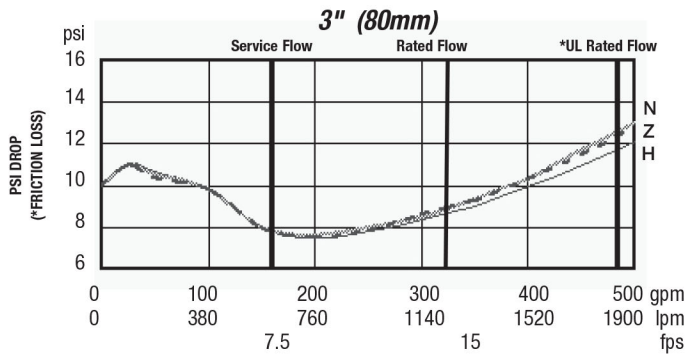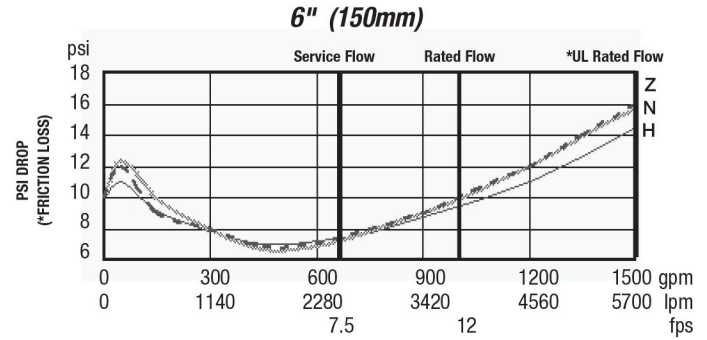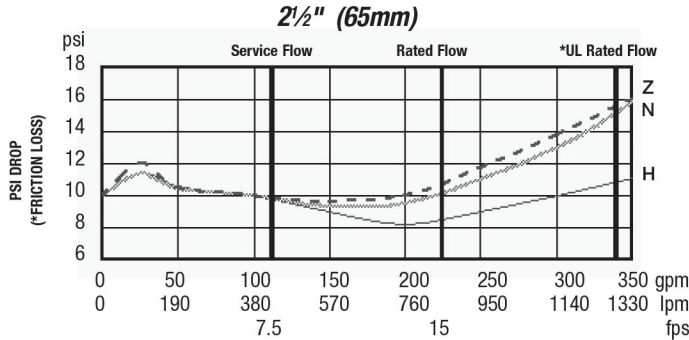

TORONTO: (905) 761-6355
Toll Free: (800) 267-8508
OTTAWA: (613) 723-6071

VANCOUVER: (604) 420-1131
Toll Free: (800)-667-2138
BURNABY: (604)-299-4498

EDMONTON: (780) 455-3870
Toll Free: (888)-891-1008
CALGARY: (403) 236-5661

MONCTON: (506) 859-7277
Toll Free: (877) 816-3473
MISSISSAUGA: (905) 565-1385

www.nationalfire.com