

## National Fire Equipment Ltd.

## **WBAT ACOUSTICAL TILE ACCESS DOOR &** WBTBAR CEILING ACCESS DOOR





Door and Trim	or and Trim  16 ga. cold rolled steel. Door is recessed to accept up to 5/8" acoustical tile.		
Frame	16 ga. cold rolled steel		
Hinge	Continuous piano hinge opens	Finish	
	180 degrees, will be placed on long side of door unless	Options (at extra cos	
	otherwise requested.		

Latch	Flush, stainless steel cam operated with screwdriver. Latches positioned opposite hinge as well as top and bottom on larger sizes.
Finish	White powder coat paintable finish
Options (at extra cost)	Medium Barrel Cylinder Lock

The WBAT Acoustical Tile Access Door is a precision ceiling door that provides a virtually concealed installation, keeping acoustical surfaces intact while contributing to sound control and better appearance. The door is recessed to accept up to 5/8" thick acoustical tile. Each door comes complete with grommets.

Model No.	A x B Door Size	Hinges	Cam Latch	Shipping Weight (lbs)
WBAT-1212	12"x12"	1	1	8
WBAT-1224	12"x24"	1	2	13
WBAT-1818	18"x18"	1	3	15
WBAT-2424	24"x24"	1	3	25
WBAT-2436	24"x36"	1	5	33



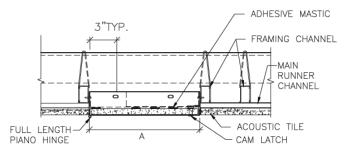





Door and Trim	.063 aluminum
Hinge	Continuous piano hinge
Latches	Flush stainless steel cam
Finish	Powder coat white
Options (at extra cost)	Key Cylinder Lock with key (code 151)

The WB-T-Bar Ceiling Access Door is a light weight aluminum door that simply drops into a t-bar ceiling with ease. Included with each door are mounting screws for a safe and secure ceiling installation.

Model No.	A x B Door Size	Ceiling Opening	Cam Latch	Shipping Weight (lbs)
WBTBAR-2424	24"x24"	23 3/4" x 23 3/4"	4	6
WBTBAR-2448	24"x48"	23 3/4" x 47 3/4"	6	11

