




National Fire Equipment Ltd.

WBEXT EXTERIOR T HANDLE ACCESS DOOR & WBWTD WALK THROUGH ACCESS DOOR



Door and Trim	16 ga. satin coat, trim 1 3/4" wide.	Insulation	2" Layer AMVIC SilveRboard Ridge Foam Insulation with a R/O Value 10
Frame	Continuous stainless steel piano hinge. Allows opening to 180°	Gasket	Open celled microcellular polyurethane on inside of door and closed cell neoprene sponge SC42 W/PSA stripping gasketing on the back of the door
Latch	Chrome-plated zinc "T" type handle with pivot rod 3 point catch. Opens from the outside only.	Application	For exterior purposes, weather resistive
Finish	Powder coat white	Options	Powder coat grey ASA61

The WBEXT Exterior T Handle Access Door is constructed of galvanized steel and is insulated. It features two types of gasketing: weather resistive open cell microcellular polyurethane gasketing and closed cell neoprene sponge SC42 W/PSA stripping gasketing on the inside for outdoor applications (certain saltwater areas might not be compatible).

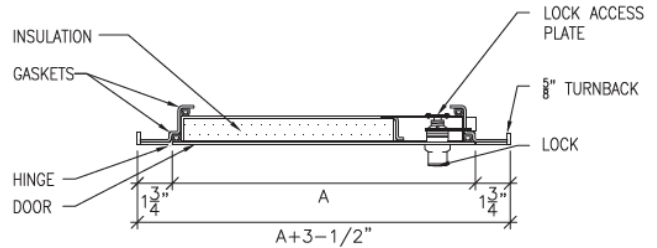

Model No.	A x B Door Size	Shipping Weight (lbs)
WBEXT-1212	12"x12"	27
WBEXT-1414	14"x14"	32
WBEXT-1616	16"x16"	36
WBEXT-1818	18"x18"	41
WBEXT-2230	22"x30"	45
WBEXT-2236	22"x36"	50

Model No.	A x B Door Size	Shipping Weight (lbs)
WBEXT-2424	24"x24"	55
WBEXT-2436	24"x36"	67
WBEXT-3030	30"x30"	75
WBEXT-3036	30"x36"	79
WBEXT-3636	36"x36"	90


Rough wall opening = door size + 1/4"



Door and Trim	22 ga. satin coat
Trim	16 ga. satin coat
Return Frame	16 ga. satin coat, 1 3/4" deep
Hinge	Full-length piano hinge
Latch	L-Handle operable from both sides. Doors higher than 48" come with 3 handles

Insulation	1" thick AMVIC SilveRboard Ridge Foam Insulation
Gasket	Neoprene gasketing on all 4 sides of door
Finish	Powder coat aluminum finish
Options (at extra cost)	<ul style="list-style-type: none"> Stainless steel #304 and #316 (#4 satin finish) Extra latches Custom sizes available


The WBWTD Walk Through Access Door is an insulated walk through door. It provides easy access to interior duct work and air handling equipment. It is constructed with galvanized steel to ensure durability. It comes complete with neoprene gasketing, insulation, full length piano hinge and a T-Handle locking latch that is operable from both sides.

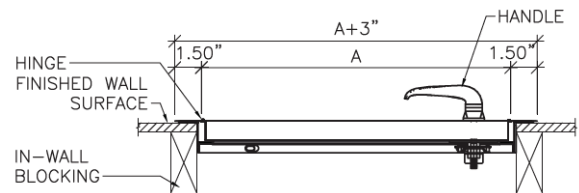

Model No.	A x B Door Size	Hinge	Latch	Shipping Weight (lbs)
WBWTD-2436	24"x36"	1	2	32
WBWTD-2448	24"x48"	1	3	42
WBWTD-2460	24"x60"	1	3	52
WBWTD-2472	24"x72"	1	3	62

Model No.	A x B Door Size	Hinge	Latch	Shipping Weight (lbs)
WBWTD-3036	30"x36"	1	2	39
WBWTD-3048	30"x48"	1	3	52
WBWTD-3060	30"x60"	1	3	65
WBWTD-3072	30"x72"	1	3	78

Rough wall opening = door size + 1/2"



TORONTO: (905) 761-6355
Toll Free: (800) 267-8508
OTTAWA: (613) 723-6071

VANCOUVER: (604) 420-1131
Toll Free: (800)-667-2138
BURNABY: (604)-299-4498

EDMONTON: (780) 455-3870
Toll Free: (888)-891-1008
CALGARY: (403) 236-5661

MONCTON: (506) 859-7277
Toll Free: (877) 816-3473
MISSISSAUGA: (905) 565-1385

www.nationalfire.com