



National Fire Equipment Ltd.


WBFR STANDARD DRYWALL FIRE RATED ACCESS DOOR & WBFR STANDARD PLASTER FIRE RATED ACCESS DOOR



Door and Trim	18 ga. cold rolled steel
Box Return Frame	16 ga. cold rolled steel, 1" wide perforated flange of 24 ga. galvanized drywall bead
Insulation	2" thick mineral wool contained within door cavity
Hinge	Fully concealed rod hinge. Allows opening to 170°.
Latch	Self-latching direct action latch, opposite hinge. Accepts both key and knurled knob, included with each door.

Automatic Panel Closer	Standard on all doors
Inside Panel Release	Standard on all doors
Finish	White powder coat paintable finish
Masonry Anchor Straps	Standard on all doors
Options (at extra cost)	<ul style="list-style-type: none"> Mortise lock preparation Ultra lock with key (code 151) Stainless steel #304 and #316 (#4 satin finish) Pemko smoke seal gasketing Custom sizes available
Ceiling Installation	To comply with current fire regulations, largest size acceptable is 24" x 36"

Model No.	A x B Door Size	Slam Catch	Hinges	Shipping Weight (lbs) Steel/Stainless
WBFRDW-1212	12"x12"	1	1	12
WBFRDW-1414	14"x14"	1	1	15
WBFRDW-1616	16"x16"	1	1	18
WBFRDW-1818	18"x18"	1	1	21
WBFRDW-2424	24"x24"	1	1	32
WBFRDW-2436	24"x36"	2	1	46

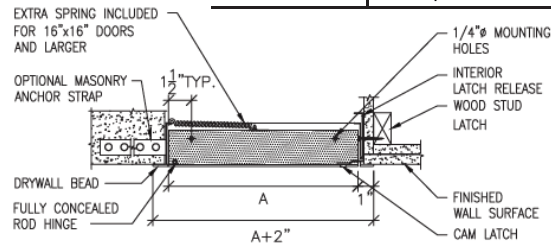


Rough wall opening = door size + 1/4"



Door and Trim	18 ga. cold rolled steel
Box Return Frame	16 ga. cold rolled steel, 3" wide perforated plaster flange of 24 ga. galvanized material. Space from the plaster mesh flange to the 1/4" safety edge of the door will accommodate 1" of plaster mud.
Insulation	2" thick mineral wool contained within door cavity
Hinge	Fully concealed rod hinge. Allows opening to 170°.
Latch	Self-latching direct action latch, opposite hinge. Accepts both key and knurled knob, included with each door.


Automatic Panel Closer	Standard on all doors
Inside Panel Release	Standard on all doors
Finish	White powder coat paintable finish
Masonry Anchor Straps	Standard on all doors
Options (at extra cost)	<ul style="list-style-type: none"> Mortise lock preparation Ultra lock with key (code 151) Stainless steel #304 and #316 (#4 satin finish) Pemko smoke seal gasketing Custom sizes available
Ceiling Installation	To comply with current fire regulations, largest size acceptable is 24" x 36"

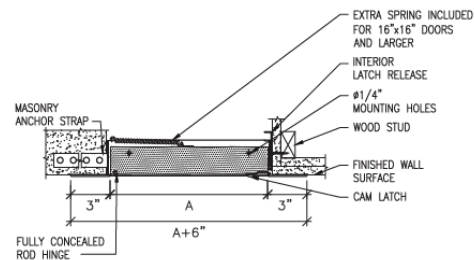

Rough wall opening = door size + 1/4"

Both WBFR Standard Plaster and Drywall Access Doors feature a tape-in flange that allows for a trimless appearance to eliminate visual distraction without compromising the fire rating. They are designed for both wall and ceiling applications. This door has an Underwriters Laboratories (UL and ULC), 1-1/2 hour "B" label, with a maximum temperature rise of 250 degrees Celsius after 30 minutes for vertical wall installations. File# R10364. Warnock Hersey International; Pittsburgh, CA 1 hour rating for combustible floor/ceiling applications. Report.# WHI-495-PSH-0191.

Warnock Hersey International, Pittsburgh, CA 3 Hour. rating for non-combustible floor/ceiling assembly, Report# WHI-495-PSH-0192. These doors may be used in a 2-hour fire rated wall assembly. For fire rated ceilings, this door has been approved by Warnock Hersey International for 3 hours (*max. size to 24" x 36"). Note: For fire-rated ceiling access doors, on size 16" x 16" and larger, extra spring supplied with door must be attached from back of door pan to framing or floor above. In horizontal (ceiling) applications door has self-assisted closing.



TORONTO: (905) 761-6355
Toll Free: (800) 267-8508

VANCOUVER: (604) 420-1131
Toll Free: (800)-667-2138

EDMONTON: (780) 455-3870
Toll Free: (888)-891-1008

MONCTON: (506) 859-7277
Toll Free: (877) 816-3473

OTTAWA: (613) 723-6071

BURNABY: (604)-299-4498

CALGARY: (403) 236-5661

MISSISSAUGA: (905) 565-1385

www.nationalfire.com