




National Fire Equipment Ltd.


WBPL PLASTER ACCESS DOOR & WBAP ACOUSTICAL PLASTER ACCESS DOOR



Door and Trim	16 ga. cold rolled steel
Box Return Frame	16 ga. steel. 3" wide plaster mesh flange of 24 ga. galvanized material. Space from the expanded flange to the 1/4" safety edge of the door will accommodate 1" of plaster.
Hinge	Fully-concealed off-set hinge. Number of hinges varies with size of door and will be placed on long side of door unless otherwise requested. Doors larger than 24"x24" have full length piano hinge.

Latch	Flush, stainless steel cam operated with screwdriver. Latches are positioned opposite hinge as well as top and bottom on larger sizes.
Finish	White powder coat paintable finish
Options (at extra cost)	<ul style="list-style-type: none"> • Key Cylinder Lock with key (code 151) • Air-tight Neoprene Gasketing • Stainless Steel #304 or #316 (#4 satin finish)

The WBPL Plaster Access Door is a flush door designed for wall and ceiling application, featuring a tape-in plaster bead. This allows for plaster mud to be applied to the flange concealing it. The 1/4" safety edge gives the door a strong frame and prevents the plaster from being chipped under normal use.

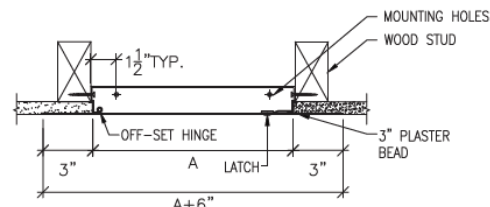

Model No.	A x B Door Size	Hinges	Cam Latch	Shipping Weight (lbs) Steel/Stainless
WBPL-88	8"x8"	1	1	4
WBPL-812	8"x12"	2	1	6
WBPL-1010	10"x10"	1	1	5
WBPL-1212	12"x12"	2	1	7
WBPL-1216	12"x16"	2	3	8
WBPL-1218	12"x18"	2	3	8
WBPL-1414	14"x14"	2	3	10
WBPL-1616	16"x16"	2	3	12

Model No.	A x B Door Size	Hinges	Cam Latch	Shipping Weight (lbs) Steel/Stainless
WBPL-1620	16"x20"	2	3	15
WBPL-1818	18"x18"	2	3	13
WBPL-2024	20"x24"	3	4	17
WBPL-2222	22"x22"	3	4	19
WBPL-2424	24"x24"	3	4	20
WBPL-2430	24"x30"	PH	4	24
WBPL-2436	24"x36"	PH	5	30


Rough wall opening = door size + 1/4"

PH = Full length piano hinge



Door and Trim	16 ga. cold rolled steel. Door is recessed 5/8" and lined with expanded metal lath
Box Return Frame	16 ga. steel with 24 ga. plaster mesh galvanized casing bead and expanded metal lath surrounding door
Hinge	Full length piano hinge opens 180°, will be placed on long side of door unless otherwise requested

Latch	Flush, stainless steel cam operated with screwdriver
Finish	White powder coat paintable finish
Options (at extra cost)	Medium barrel cylinder lock

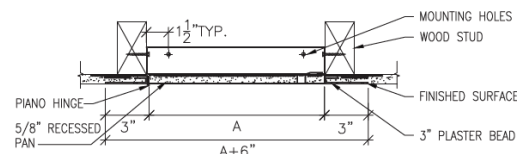

The WBAP Acoustical Plaster Access Door is a precision door that provides a virtually concealed installation, keeping acoustical surfaces intact while contributing to sound control and better appearance. Door panels are recessed to receive plaster up to 5/8" thick. Plaster covering the door finishes flush with the surrounding field, leaving only the narrow frame edges exposed. The metal sides of the recessed door panel prevent damage to the edges of the plaster. This door operates on a continuous stainless steel piano hinge, located at the outside edge so that the door may be opened fully to 180 degrees.

Model No.	A x B Door Size	Hinges	Cam Latch	Shipping Weight (lbs) Steel/Stainless
WBAP-1212	12"x12"	1	1	10
WBAP-1224	12"x24"	1	2	13
WBAP-1818	18"x18"	1	3	15
WBAP-2424	24"x24"	1	4	28
WBAP-2436	24"x36"	1	5	37

Rough wall opening = door size + 1/4"



**National Fire
Equipment Ltd.**

TORONTO: (905) 761-6355

Toll Free: (800) 267-8508

OTTAWA: (613) 723-6071

VANCOUVER: (604) 420-1131

Toll Free: (800)-667-2138

BURNABY: (604)-299-4498

EDMONTON: (780) 455-3870

Toll Free: (888)-891-1008

CALGARY: (403) 236-5661

MONCTON: (506) 859-7277

Toll Free: (877) 816-3473

MISSISSAUGA: (905) 565-1385

www.nationalfire.com