



National Fire Equipment Ltd.

WBUAD UTILITY ACCESS DOOR




Door and Trim	16 ga. cold rolled steel, trim 1 1/2" wide
Return Frame	16 ga. cold rolled steel, depth of 1 3/4"
Hinge	Spring pin hinge up to 24" x 24" Piano hinge on doors larger than 24" x 24"
Latch	Flush, stainless steel cam operated with screwdriver. Latches are positioned opposite hinge as well as top and bottom on larger sizes.
Finish	White powder coat paintable finish
Options (at extra cost)	<ul style="list-style-type: none"> • Tamper Proof Cams, Hex, Torx Pin screw assembly • Key Cylinder Lock with key (code 151) • Mortise Lock Preparation • Stainless Steel #304 or #316 (#4 satin finish) • Galvanized/Zinc Coating Finish • Custom Sizes Available


The WBUAD Utility Access Door is an innovative, cost-effective access door. This door is laser cut from 16-gauge cold rolled steel and of unwelded construction that allows for an aesthetically pleasing appearance and square fit for wall and ceiling applications. This door features a spring-loaded pin hinge that allows the door panel to be removed.

Model No.	A x B Door Size	Cam Latch	Shipping Weight (lbs) Steel/Stainless
WBUAD-66	6" x 6"	1	1
WBUAD-88	8" x 8"	1	3
WBUAD-812	8" x 12"	1	4.1
WBUAD-1010	10" x 10"	1	4.1
WBUAD-1212	12" x 12"	1	5
WBUAD-1414	14" x 14"	3	6
WBUAD-1616	16" x 16"	3	6.8
WBUAD-1818	18" x 18"	3	10
WBUAD-1824	18" x 24"	3	14.1
WBUAD-2020	20" x 20"	3	11
WBUAD-2222	22" x 22"	4	14.4
WBUAD-2230	22" x 30"	4	16.1
WBUAD-2236	22" x 36"	5	17.1
WBUAD-2424	24" x 24"	4	15
WBUAD-2430	24" x 30"	4	19.5
WBUAD-2436	24" x 36"	5	22.5
WBUAD-2448	24" x 48"	6	30
WBUAD-3030	30" x 30"	6	24
WBUAD-3636	36" x 36"	9	34

Rough wall opening = door size + 1/8"

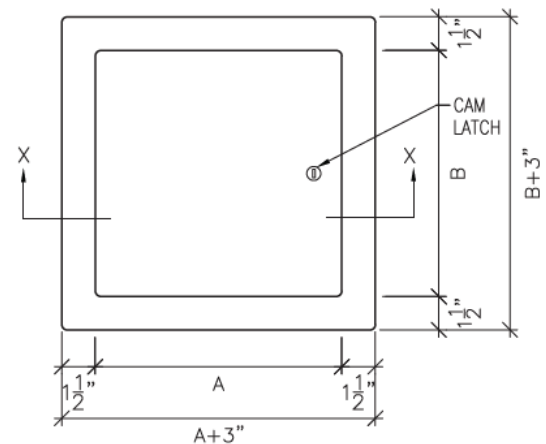

Elevation

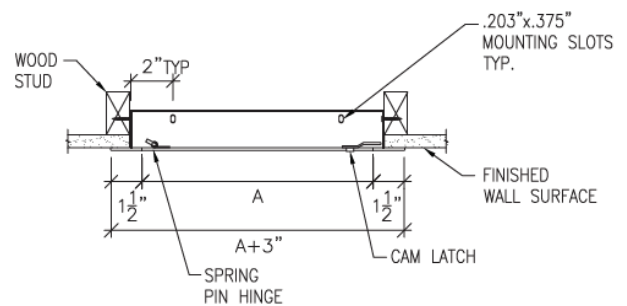

Section Detail