




# National Fire Equipment Ltd.

## WICK 250 - 2 STROKE 3 STAGE FIRE PUMP

### PORTABLE THREE STAGE HIGH PRESSURE FIRE PUMP

- For Emergency Rescue Equipment used by forestry and other emergency services
- Light-weight, very stable, economical and high performance are the hallmarks of the WICK® 250
- Best performance of all fire pumps in its' class
- 8 HP, 2-stroke engine coupled to a three-stage foam-compatible pump
- Electronic over-speed protection cut-out switch
- See chart for available fuel connection models
- Overall design for exceptional ease in maintenance
- Optional U.S.D.A. (United States Department of Agriculture) approved spark arrestor
- Optional transportable back pack

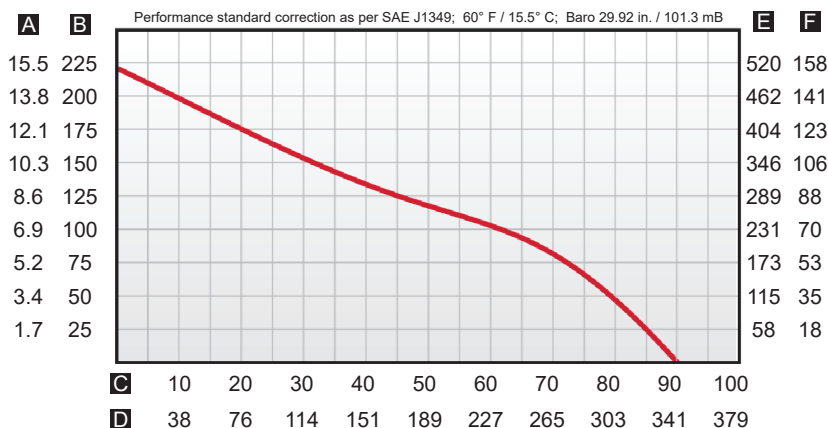

#### WEIGHT & DIMENSIONS

Length	15.3"	39 cm
Width	13.0"	33 cm
Height	12.5"	31.8 cm
Weight (Dry)	31 lbs	14.1 kg
Suction	2.0"	50 mm NPSH
Discharge	1 ½ "	38 mm NPSH

#### ENGINE

Hydro-Wick series	2 stroke 134 cc
Power	8 HP
Ignition	Electronic breakerless
Fuel Mixture	24:1

Specifications can be subject to change without notice



National Fire  
Equipment Ltd.

TORONTO: (905) 761-6355  
Toll Free: (800) 267-8508

OTTAWA: (613) 723-6071

VANCOUVER: (604) 420-1131  
Toll Free: (800)-667-2138

BURNABY: (604)-299-4498

EDMONTON: (780) 455-3870  
Toll Free: (888)-891-1008

CALGARY: (403) 236-5661

MONCTON: (506) 859-7277  
Toll Free: (877) 816-3473

MISSISSAUGA: (905) 565-1385

[www.nationalfire.com](http://www.nationalfire.com)



# National Fire Equipment Ltd.

## WICK 250 2 STROKE 3 STAGE FIRE PUMP

### Bid Specification

- The portable fire pump must have an 8 HP 2-stroke engine
- The engine must be coupled to a three stage foam compatible pump end
- It must be equipped with an electronic over-speed protection cut-out switch
- The weight shall not exceed 31 lbs / 14.1 kg
- The pump must have a detachable rewind starter for emergency rope start
- The fuel connection must be available with Chrysler, Mercury or SAE style quick-connect
- When requested, the pump must be equipped with a USDA approved spark arrestor
- The pump must be available with a transportable back pack
- The pump must have minimum flow and pressures as shown in the performance chart on the opposite page



### WICK® 250

Part#	Description
71WICK250-AC	WICK® 250 Fire Pump - Chrysler connection
71WICK250-MAC	WICK® 250 Fire Pump - Mercury connection
71WICK250-MAQC	WICK® 250 Fire Pump - Mercury connection (low tone muffler model)
71WICK250-SAEA	WICK® 250 Fire Pump - SAE connection - c/w Spark Arrestor



A



B



C1



E



H

### OPTIONAL

A	71W25-HPACK	Back board for carrying
B	70FLPFT5	Fuel Tank .. 6.6 US Gal. / 25 Liters *
C1	70FLPFL-M	Mercury fuel line
C2	70FLPFL	Chrysler fuel line
C3	70FLPFL-GSA	GSA / SAE fuel line
D1	70FLHPPQC	Hand Primer QC
D2	70FLHPPPS	Hand Primer NPSH
D3	70FLHPPNH	Hand Primer NH
E	70FL15TPPS	Thread protector 1 1/2" / 38mm
E	70FL20TPPS	Thread protector 2" / 51mm
E	6124NM24PF	Adaptor .. 1 1/2" / 38mm NH Male x 1 1/2" / 38mm NPSH Female
F	71W37-SPKARR	Spark Arrestor
G	70FL20DLPS10	Draftlite HP suction hose..2"/51mm x 10'/3M c/w NPSH *
H	70FLFV2PF	Foot Valve / Strainer 2"/51mm NPSH Female *

\* See website for complete listing of accessory and related products



National Fire  
Equipment Ltd.

TORONTO: (905) 761-6355  
Toll Free: (800) 267-8508

OTTAWA: (613) 723-6071

VANCOUVER: (604) 420-1131  
Toll Free: (800)-667-2138

BURNABY: (604)-299-4498

EDMONTON: (780) 455-3870  
Toll Free: (888)-891-1008

CALGARY: (403) 236-5661

MONCTON: (506) 859-7277  
Toll Free: (877) 816-3473

MISSISSAUGA: (905) 565-1385

[www.nationalfire.com](http://www.nationalfire.com)