




National Fire Equipment Ltd.

WICK FT-200-4B - 4 STROKE FLOATING FIRE PUMP

PORTABLE FLOATING HIGH PRESSURE FIRE PUMP

- Floating fire pumps can be deployed rapidly without the need for suction hose or foot valves. They are also practical for shallow water applications
- This rugged Fire pump meets the Fire Fighting demands of municipal and forestry services. Other applications include de-watering, marine, environmental clean-up, irrigation, power washing and many more
- Powered by a reliable, high performance Briggs and Stratton EPA approved 4-Stroke air-cooled engine with low fuel consumption and an acoustically-engineered muffler for quiet operation. Also equipped with a recoil hand starter and Over-speed protection
- Featuring "ReadyStart®" starting system and Automatic Choke for super easy starting
- The only high pressure 4 Stroke floating pump on the market with nearly 3 times the pressure of other 4 stroke floating pumps and at less than 2/3 the weight!
- This pump is designed with ease of maintenance in mind with a Built-in easily removable intake screen
- Hard Anodized Aluminum casing and Impeller for added corrosion resistance
- Face-type spring-loaded mechanical seal is standard. No adjustment required
- Stainless steel pump shaft and hardware for added corrosion resistance
- The float has 'Molded' carrying handles front, rear and on the sides for easy transport
- 4 ½ hour run time fuel tank

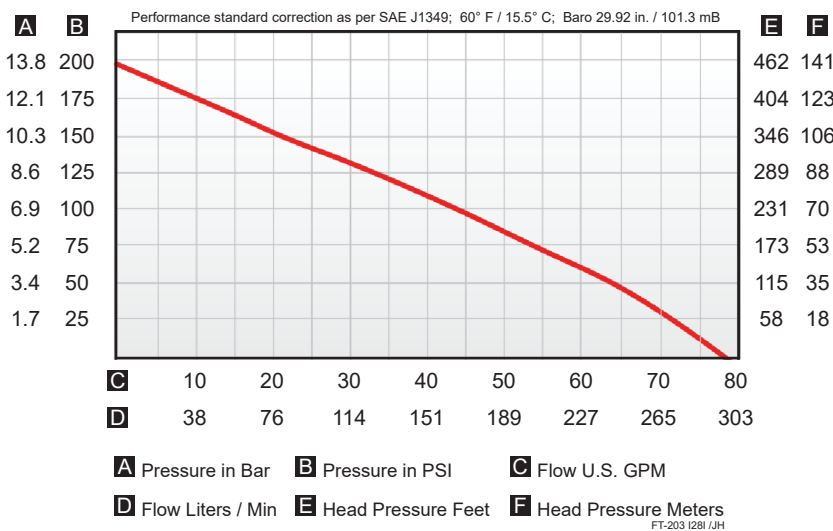

WEIGHT & DIMENSIONS


LENGTH	38.75"	98.4 cm
WIDTH	25.0"	63.5 cm
HEIGHT	23"	58.4 cm
WEIGHT (DRY)	74 Lbs	33.6 Kg
DISCHARGE	1 ½"	38 mm NPSH

Standard NPSH threads, other discharge threads available

ENGINE

	PROFESSIONAL SERIES** 4
BRIGGS AND STRATTON STROKEDISPLACEMENT	223 cc
OIL CAPACITY	18 oz. / 0.54 L
FUEL TANK	2.50 US Gal. / 9.46 L
FUEL TANK (OPTIONAL)	1.25 US Gal. / 4.73 L

* ReadyStart® is a trade mark of Briggs & Stratton
** "Professional" series engine has a 60% longer life than the "E" series
Specifications subject to change without notice



TORONTO: (905) 761-6355
Toll Free: (800) 267-8508

VANCOUVER: (604) 420-1131
Toll Free: (800)-667-2138

EDMONTON: (780) 455-3870
Toll Free: (888)-891-1008

MONCTON: (506) 859-7277
Toll Free: (877) 816-3473

OTTAWA: (613) 723-6071

BURNABY: (604)-299-4498

CALGARY: (403) 236-5661

MISSISSAUGA: (905) 565-1385

www.nationalfire.com



National Fire Equipment Ltd.

WICK FT-200-4B - 4 STROKE FLOATING FIRE PUMP

BID SPECIFICATION FOR PORTABLE HIGH PRESSURE FLOATING PUMP

The pump must come with the following features and meet the minimum specifications mentioned below

- Hard Anodized Aluminum casing and Impeller
- Self-Priming
- Stainless Steel pump Shaft
- Stainless Steel Hardware
- Face-type Spring Loaded mechanical seal – No maintenance
- Built-in intake screen
- 223cc (13.61 cu. in) displacement, Single cylinder, 4-stroke, air-cooled, OHV (Overhead Valve) with over-speed protection
- Automatic Choke System
- Recoil hand starter
- Pump must include an EPA approved gas tank
- Optional 4.73 liter gas tank (Not available in the U.S.A.)
- The flow and pressures must meet the peak performance chart numbers shown on previous page



WICK® 200-4B (RFTC MODEL)

A	71WICKFT-200-4BX	WICK® FT-200-4B Fire Pump with standard 9.5 liter tank
B	71WICKFT-200-4B	WICK® FT-200-4B Fire Pump with optional 4.73 liter tank (Not available in the U.S.A.)