




# National Fire Equipment Ltd.

## WICK FT-200 2 STROKE PORTABLE FLOATING FIRE PUMP

### PORTABLE FLOATING HIGH PRESSURE FIRE PUMP

- The floating fire pump meets the rugged demands of forestry services and also used for marine service, dewatering, pool maintenance, environmental clean-up and irrigation.
- Unique hard anodized aluminum impeller and housing
- Automatic throttle control
- Unique electronic overspeed protection
- Pump end is designed for easy field maintenance
- Unique fuel lever gauge
- Face-type mechanical seal is standard. No adjustment required
- Built-in intake screen
- Water-resistant air cleaner and muffler
- 8 horsepower, 8.20 cu. in. (134cc) displacement, air-cooled
- Recoil hand starter
- Carburetor with integral fuel pump
- Solid-state ignition
- Electronic over-speed protection cut-out switch
- Nikasil plated cylinder bore
- Ball bearing-supported crankshaft
- Roller bearing-equipped connecting rod
- Uses unleaded gasoline and oil mixed
- Automatic float controlled throttle

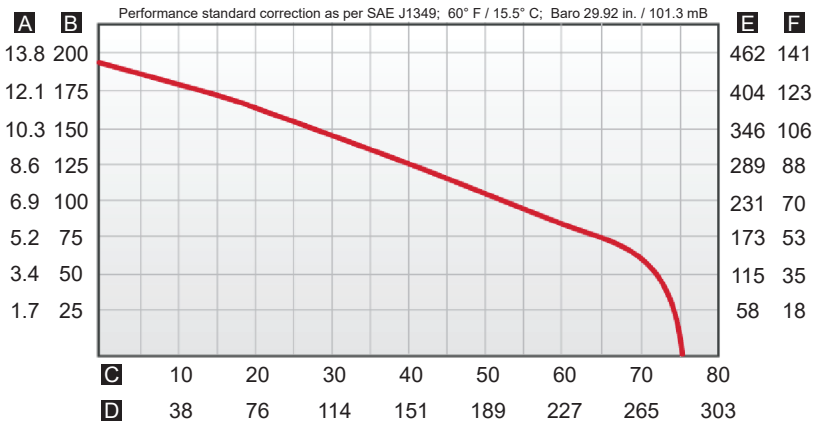

**A** Pressure in Bar    **B** Pressure in PSI    **C** Flow U.S. GPM  
**D** Flow Liters / Min    **E** Head Pressure Feet    **F** Head Pressure Meters  
FT-200 A09C/JH

WEIGHT & DIMENSIONS		
LENGTH	29.5"	74.9 CM
WIDTH	20.0"	50.8 CM
HEIGHT	16.5"	41.9 CM
WEIGHT (DRY)	43 LBS	19.5 KG
DISCHARGE	1 1/2"	38 mm NPSH*
* Standard NPSH threads, other discharge threads available		
ENGINE		
HYDROWICK	2 STROKE	
POWER	8 HP	
CYLINDER	NIKASIL	
IGNITION	ELECTRONIC	
FUEL TANK	5 QUART 4.7 LITER	
<small>Specifications can be subject to change without notice</small>		



# National Fire Equipment Ltd.

## WICK FT-200 2 STROKE PORTABLE FLOATING FIRE PUMP

### **BID SPECIFICATION FOR PORTABLE HIGH PRESSURE FLOATING PUMP**

The pump must come with the following features and meet the minimum specifications mentioned below

- Hard anodized aluminum impeller and housing
- Automatic throttle control
- Electronic overspeed protection
- Pump end design for easy field maintenance
- Fuel lever gauge
- Face-type mechanical seal
- Built-in intake screen
- Water-resistant air cleaner and muffler
- 8 horsepower, 8.20 cu. in. (134cc) displacement, air-cooled engine
- Recoil hand starter
- Carburetor with integral fuel pump
- Solid-state ignition
- Electronic over-speed protection cut-out switch
- Nikasil plated cylinder bore
- Ball bearing-supported crankshaft
- Roller bearing-equipped connecting rod
- Unleaded gasoline and oil mixed
- Automatic float controlled throttle
- The flow and pressures must meet the peak performance chart numbers shown on previous page

#### **WICK®FT-200**

PART#	DESCRIPTION
71WICKFT-200	Wick FT-200 Fire Pump



**National Fire  
Equipment Ltd.**

TORONTO: (905) 761-6355  
Toll Free: (800) 267-8508

OTTAWA: (613) 723-6071

VANCOUVER: (604) 420-1131  
Toll Free: (800)-667-2138

BURNABY: (604)-299-4498

EDMONTON: (780) 455-3870  
Toll Free: (888)-891-1008

CALGARY: (403) 236-5661

MONCTON: (506) 859-7277  
Toll Free: (877) 816-3473

MISSISSAUGA: (905) 565-1385

[www.nationalfire.com](http://www.nationalfire.com)