

National Fire Equipment Ltd.

Model TG-5 5 Valve Back! ow Prevention Assembly Test Kit

Application

The ZURN WILKINS Model TG-5 Backflow Prevention Assembly Test Kit is designed for testing all brands of Pressure Type Vacuum Breakers, Double Check Valve, and Reduced Pressure Principle Backflow Prevention Assemblies. The TG-5 is capable of performing all known testing procedures including those recommended by ASSE, AWWA and FCCCHR at USC.

Materials

Molded Plastic Case material Gauge body Thermoplastic **Fittings** Brass (NPT & SAE) **EP Elastomers** Internals 316 Stainless Steel

Brass

Hose Buna Nitrile liner and jacket

Calibration

The ZURN WILKINS Model TG-5 Backflow Prevention Assembly Test Kit is subjected to calibration testing conforming to standards traceable to the National Bureau of Standards. It is recommended that gauges be rechecked for calibration annually. ZURN WILKINS is not liable for shifts in calibration other than caused by defects.

Features

| Max | imum working pressure | 200 psi |
|---|---|----------------------------|
| Working temperature range 35° F to 150° F | | |
| | Gauge body of engineered | thermoplastic material |
| | Gauge dial: 4 1/2" diamete | r, 0-15 P.S.I. scale |
| | (75 divisions) | |
| | 200 psi line pressure gauge | |
| | Accuracy: +/- 0.2 P.S.I.D. (descending) | |
| | Valves: soft-seated needle | with replaceable seats |
| | (5 total) | |
| | Hoses & end fittings: (3) co | |
| | and (1) 4' long clear bleed tu | |
| | and 00 micron cloanable no | roug motal (brace) filtore |

5 year warranty against defects in materials and

Durable carrying case with external fitting compart-

Specification

ments

manufacturing




Accessories

QT-SET Quick Test Fitting Set

Testing

The TG-5 is capable of testing the following backflow prevention devices:

| Reduced Pressure Principle Assemblies | |
|---------------------------------------|--|
| Double Check Valve Assemblies | |
| Pressure Vacuum Breaker Assemblies | |

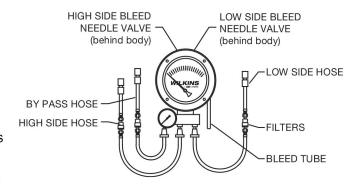

The Backflow Prevention Test Kit shall be a 5 valve pressure differential type. The test kit shall comprise of a 4 1/2" dial set in a thermoplastic housing with a 0 to 15 P.S.I. scale (0.2 P.S.I.D. Increments) and an accuracy of +/- 0.2 P.S.I.D. (Descending). The test kit shall incorporate 5 color coded resilient seated needle valves with SAE flare fittings and 3 color coded pressure hoses (5 ft. lengths). The test kit shall include a hard plastic case, calibration certificate and a laminated instruction sheet. The Backflow Prevention Test Kit shall be a ZURN WILKINS Model TG-5.

