



# National Fire Equipment Ltd.

## Model 40XL2 In-Line Single Check Valve



### Application

Ideal for use where Lead-Free\* valves are required. Designed for installation on potable domestic and commercial water systems such as well pump systems and applications requiring tight seating. For use as a positive backstop to eliminate reduced pressure principle backflow preventer discharge caused by pressure fluctuations or water hammer.



ANSI/NSF 61-G

### Standards Compliance

- UL® Classified - ANSI/NSF Standard 61 and 372 (\*0.25% maximum weighted average lead content)

### Materials

Main valve body	Lead Free Brass
Poppet	Polyetherimide
Seat	NBR
Spring	Stainless Steel, 300 series


### Features

Sizes: 1/4", 1/2", 3/8", 3/4", 1", 1 1/4", 1 1/2", 2", 2-1/2", 3", 4"

Maximum working water pressure	400 WOG
Maximum working water temperature	210°F
End connections Threaded	ANSI B1.20.1

### Dimensions & Weights (do not include pkg.)

MODEL SIZE		DIMENSIONS (approximate)						WEIGHT	
		A		B		C			
in.	mm	in.	mm	in.	mm	in.	mm	lbs.	kg
1/4	8	2 5/16	59	1	25	1 3/8	35	0.3	0.1
3/8	10	2 5/16	59	1	25	1 3/8	35	0.3	0.1
1/2	15	2 5/15	59	1	25	1 3/8	35	0.3	0.1
3/4	20	2 9/16	65	1 1/4	32	1 11/16	43	0.5	0.2
1	25	2 3/4	70	1 1/2	38	1 15/16	49	0.7	0.3
1 1/4	32	2 15/16	75	1 7/8	48	2 3/8	60	1	0.5
1 1/2	40	3 3/16	81	2 1/16	52	2 7/8	73	1.6	0.7
2	50	3 3/8	86	2 11/16	68	3 1/2	89	2.2	1
2 1/2	65	4 3/8	111	3 1/4	83	4 3/8	111	3.7	1.7
3	80	4 7/8	124	3 7/8	73	5 1/4	133	5.5	2.5
4	100	5 7/16	138	5	127	6 7/16	164	9.5	4.3

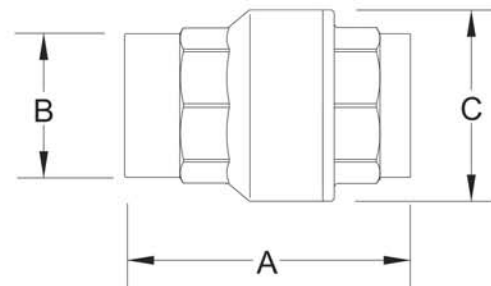

### Typical Installations

Local codes shall govern installation requirements. To be installed in accordance with the manufacturer's instructions and the latest edition of the Uniform Plumbing Code. Not recommended for installation in sewage ejector piping or for reciprocating air compressor service.

### Specifications

The In-Line Single Check Valve shall be rated for 400 WOG. The body shall be lead free brass, the seat gasket shall be NBR, and the spring shall be stainless steel (300 series). The In-Line Single Check Valve shall be a ZURN WILKINS Model 40XL2.



National Fire  
Equipment Ltd.

TORONTO: (905) 761-6355  
Toll Free: (800) 267-8508  
OTTAWA: (613) 723-6071

VANCOUVER: (604) 420-1131  
Toll Free: (800)-667-2138  
BURNABY: (604)-299-4498


EDMONTON: (780) 455-3870  
Toll Free: (888)-891-1008  
CALGARY: (403) 236-5661

MONCTON: (506) 859-7277  
Toll Free: (877) 816-3473  
MISSISSAUGA: (905) 565-1385


www.nationalfire.com

# Flow Characteristics


**MODEL 40XL2 1/4" - 3/8"**

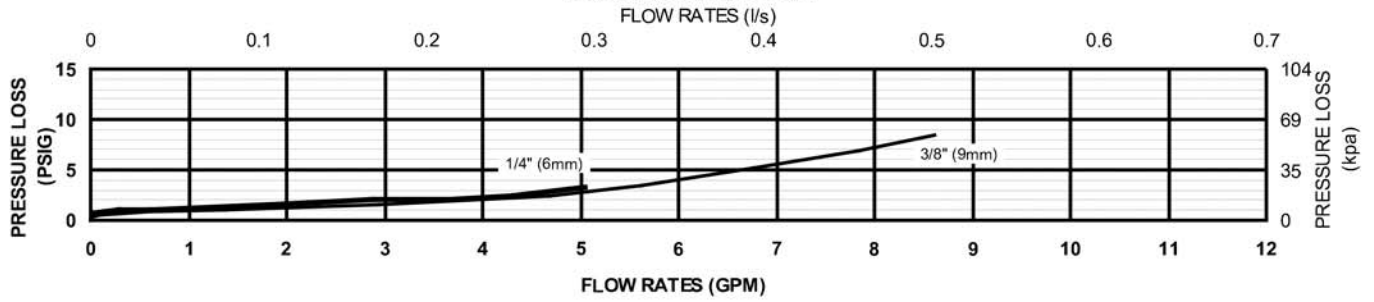


**MODEL 40XL2 1/2" - 3/4"**

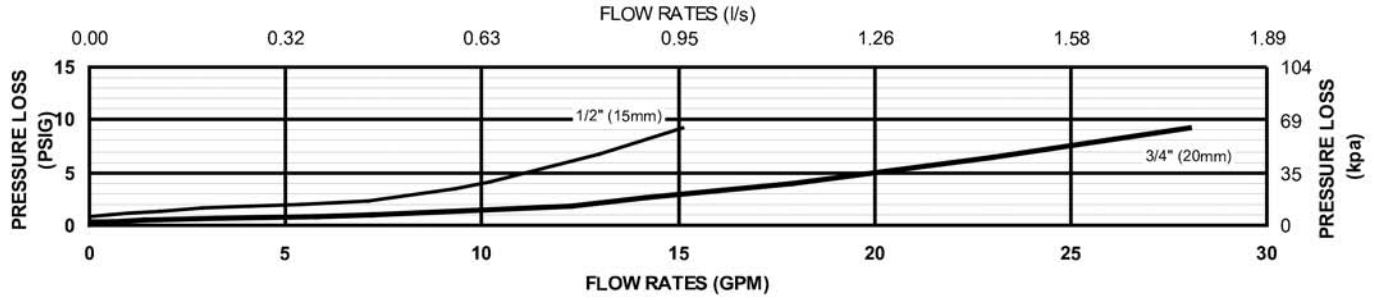


**MODEL 40XL2 1" - 1 1/2"**

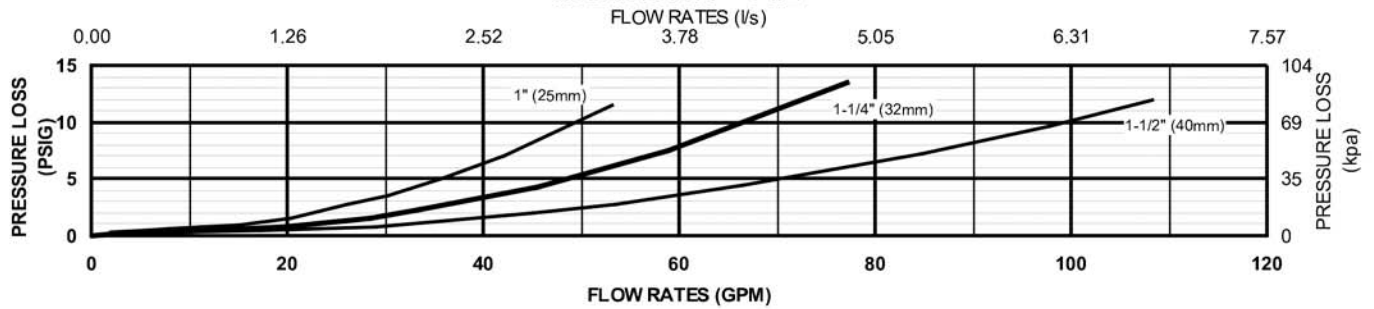

**MODEL 40XL2 2" - 3"**

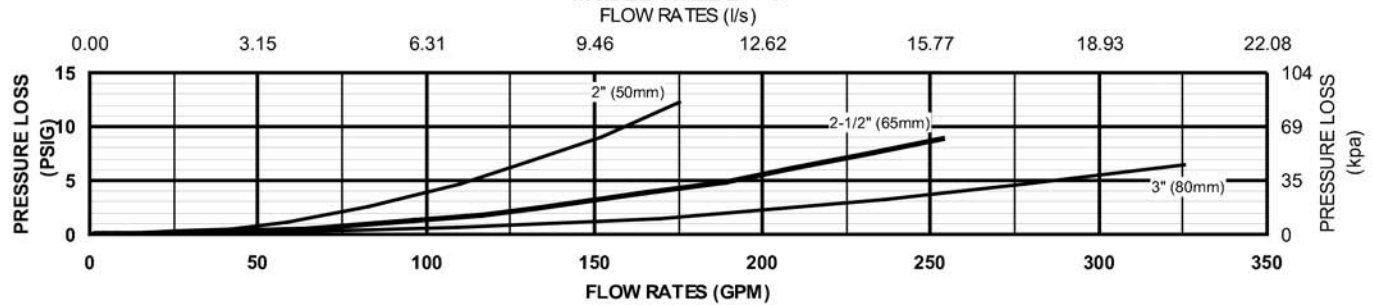

**MODEL 40XL2 4"**

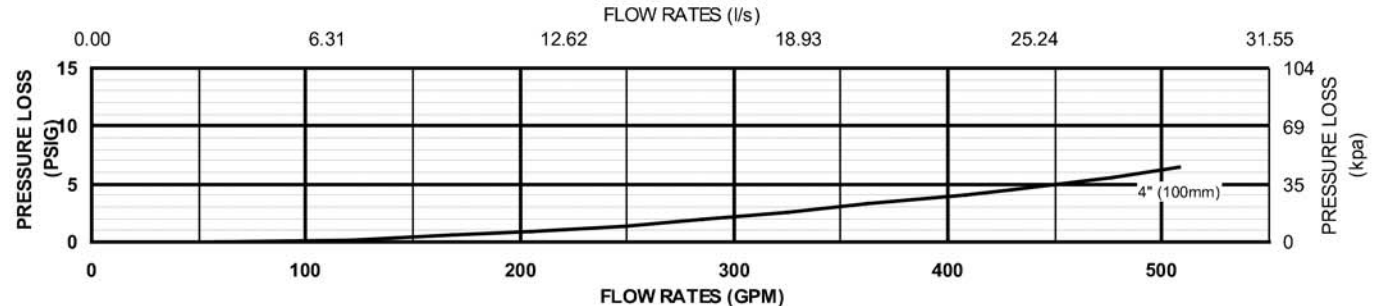

**National Fire  
Equipment Ltd.**

TORONTO: (905) 761-6355  
Toll Free: (800) 267-8508  
OTTAWA: (613) 723-6071

VANCOUVER: (604) 420-1131  
Toll Free: (800)-667-2138  
BURNABY: (604)-299-4498

EDMONTON: (780) 455-3870  
Toll Free: (888)-891-1008  
CALGARY: (403) 236-5661

MONCTON: (506) 859-7277  
Toll Free: (877) 816-3473  
MISSISSAUGA: (905) 565-1385

www.nationalfire.com