




National Fire Equipment Ltd.

SIDEWALK SIAMESE & PLATE OPTIONS

Model 207, 2½" (65mm) Sidewalk Siamese FD Connection.

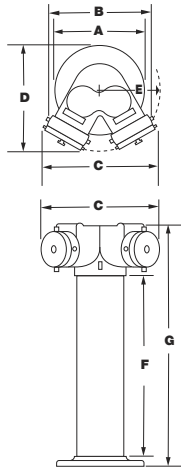

Application: Free Standing Fire Department connection when a wall mounted FD connection is not practical.

Double Inlet with 500 GPM inlet capacity used to supplement water supply in standpipe or sprinkler systems. Body comes with a single swing clapper to prevent water from exiting the second inlet when not in use. Standard with (2) 2½" (65mm) swivel hose thread inlet connections with 4" (100mm) or 6" (152mm) main connection. Standard plate lettering is "Auto. Spkr.", "Standpipe" or combined "Auto. Spkr / Standpipe".

Construction: Cast Brass Body, Brass or Red Aluminum escutcheon plate, Red aluminum break-off caps or brass plugs, 18" (457mm) polished brass cover sleeve.

Rated Pressure: 300 PSI /2068.50 kpa Options: Satin Chrome, Polished Brass, Polished Chrome. Sleeve Available in Polished Finish Only.

Approvals: ULC, UL, FM

SIZE (Inches)	A	B	C	D	E	F	G
4" x 2 ½"x 2 ½"	10	9 1/4	11 1/2	8 5/8	6	18	23 1/2
6" x 2 ½"x 2 ½"	12 5/16	9 1/4	11 1/2	9 7/8	6	18	23 3/4
SIZE (Millimeters)							
10.16 x 6.35 x 6.35	254	235	292	219.2	152	457	597
15.24 x 6.35 x 6.35	313	235	292	251	152	457	603

Model 209 Round Plates

	<u>Plate Size</u>	<u>Plate Material</u>	<u>Plate Lettering</u>	<u>Water Flow</u>
209-15	1½" (38mm)	A = Red Aluminum	(1) Auto. Spkr.	(INLET)
209-25	2½" (65mm)	B = Brass	(2) Standpipe	(INLET)
209-4	4" (100mm)	C = Chrome	(3) Auto. Spkr./Standpipe	(INLET)
209-6	6" (152mm)		(4) Wall Hydrant	(Outlet)
			(5) Auto. Spkr./Gicleurs Auto.	(INLET)
			(6) Standpipe/Canalisation D'Incendie	(INLET)
			(7) Gicleurs Auto.	(INLET)
			(8) Canalisation D'Incendie	(INLET)
			(9) Borne Murale	(Outlet)
			(10) Essai de Pompe	(Outlet)
			(11) Gicleurs Auto./Canalisation	(INLET)
			(12) Wall Hydrant/Borne Murale	(Outlet)
			(13) Pump Test	(Outlet)



Red Aluminum



Brass

Chrome

Custom plates available

(Minimum Quantities may apply, contact customer service for details.)

