




National Fire Equipment Ltd.

Recessed Siamese Outlet Connection

Flush design; for when appearance counts. Double outlet hydrant connection or pump test connection.



Model 230
Wall Hydrant Connection

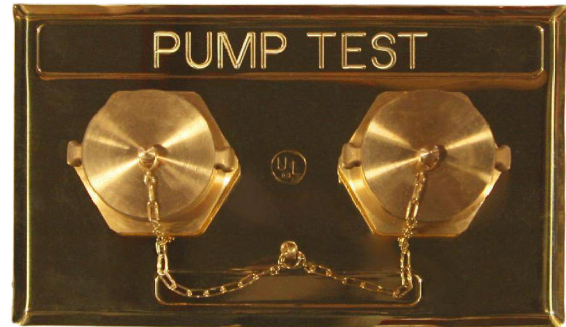

Model 232
Pump Test Connection



Comes Complete With:

- Model A101NB straight body or A102NB angle body (A102NB angle body permits for top or bottom main pipe feed connection) - IMPORTANT: confirm that drop clappers have been removed
- A103 Polished rectangular escutcheon plate - lettering "Wall Hydrant" or "Pump Test"
- (2) A93 2½" (65mm) brass male outlet adapters
- (2) A80 2½" (65mm) brass caps

Construction: Cast brass body, brass plate, brass hydrant adapters and brass caps. All exposed services standard with polished finish. Options: polished brass, polished chrome. Plate (only) also available in stainless steel with polished or satin finish with engraved lettering. Custom plates available.

Rated Pressure: 300 PSI /2068.50 kpa

Approvals: ULC & UL




For 6" threaded connection; use NFE model A104 adapter



For grooved 4" connection; use NFE model A88GB adapter



For control valves on 2½" connections use NFE Model A53G

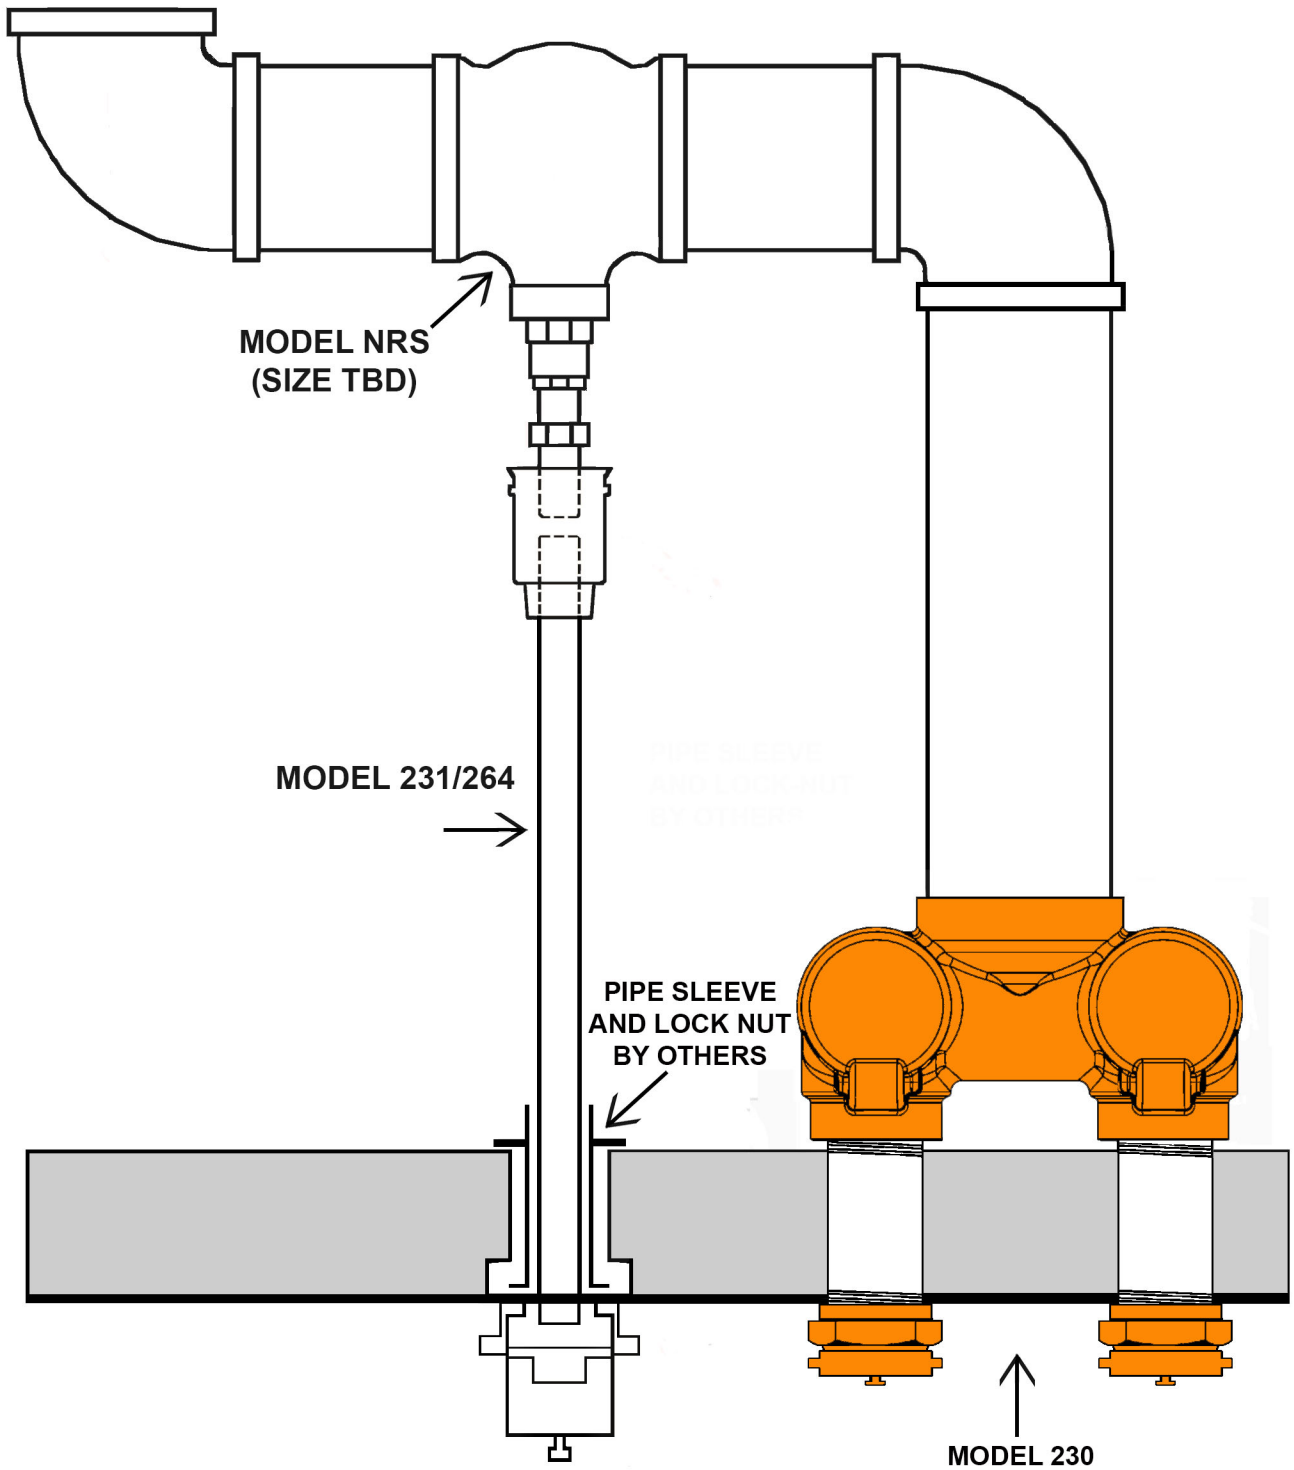

**National Fire
Equipment Ltd.**

TORONTO: (905) 761-6355
Toll Free: (800) 267-8508

OTTAWA: (613) 723-6071

VANCOUVER: (604) 420-1131
Toll Free: (800)-667-2138

BURNABY: (604)-299-4498

EDMONTON: (780) 455-3870
Toll Free: (888)-891-1008

CALGARY: (403) 236-5661

MONCTON: (506) 859-7277
Toll Free: (877) 816-3473

MISSISSAUGA: (905) 565-1385

www.nationalfire.com