





MODEL HRS CONTINUOUS FLOW HOSE REELS



The ultimate reel/hose combination for industrial washdown!
Operates in seconds, packs away in seconds. The 1" diameter PVC coated hose is both rugged and easy to clean. For hose that operates in near freezing temperatures; upgrade to our premium EPDM multipurpose hose. This model comes complete with combination fog/straight stream nozzle. Also suitable for special application fire protection (detention areas, etc). This swing type hose reel has a double 180° rotating hinge which allows hose reel to be mounted in a recessed wall.

ISO9001:2015 Certified Quality System. Manufactured under a quality system certified as complying with AS/NZS ISO 9001:2015 by SAI-Global Assurance Services AS/NZS ISO 9001:2015 Cert. No. QEC12314 SAI-Global.


- Drum epoxy polyester powder coated paint
- PVC coated non collapsible hose
- Threaded 1" NPT Inlet connection
- Outlet connection for hose can be rotated for left and right direction
- Fog/straight stream chromed/brass nozzle
- Waterways made from non ferrous metals; for corrosion protection
- Maximum working pressure: 232 psi, test pressure 270 psi

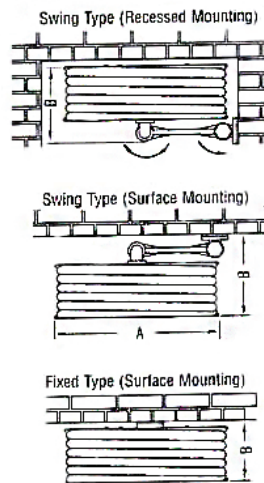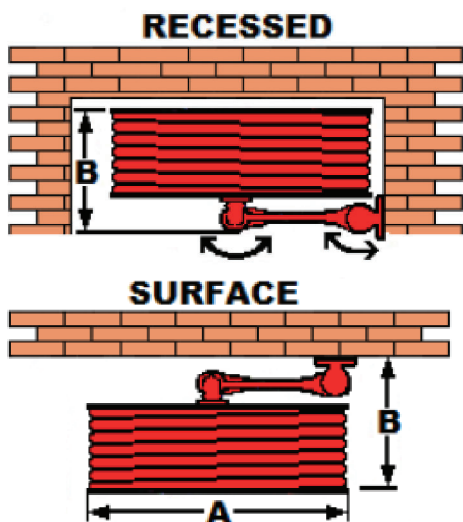

Model No.	Type	Mounting	A Dimension	B Dimension	Capacity
HRS-038-12-NFE	Swing Manual	Rec/Surface	22" (559mm)	11 3/4" (299mm)	1" x 98" (25mm x 30m)



INSTALLATION INSTRUCTIONS FOR HRS REELS

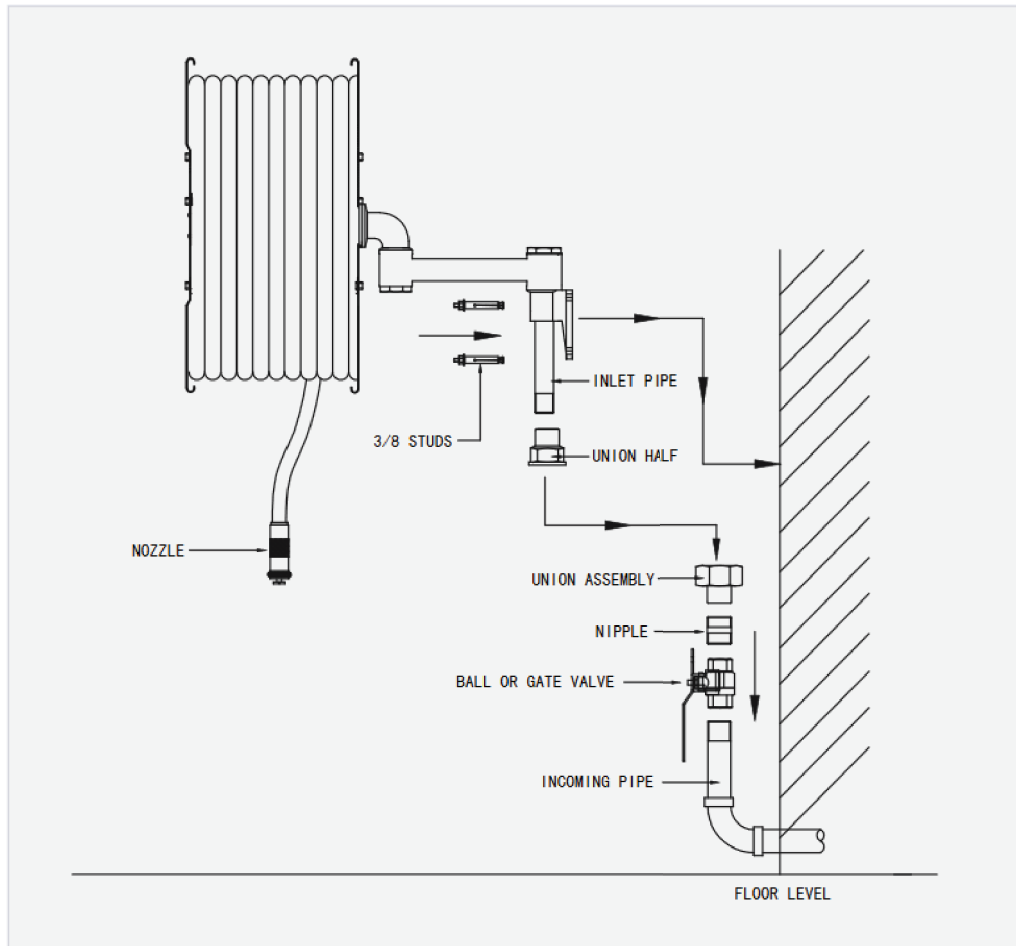

Step 1: Securely mount hose reel bracket to wall using 3/8" studs.

Step 2: Attach valve, nipple and union assembly to the incoming pipe connection*.

Step 3: Attach the half union into the inlet pipe connection on the reel.

Step 4: Align and secure the union assembly to the corresponding union half.

Step 5: Fill hose reel with water and close nozzle. Check for leakage.

Step 6: Close ball valve and open nozzle to depressurize hose.

*IMPORTANT: Install with bottom water feed only