




TYCO® BlazeMaster® CPVC Pipe & Fittings

The dependable choice

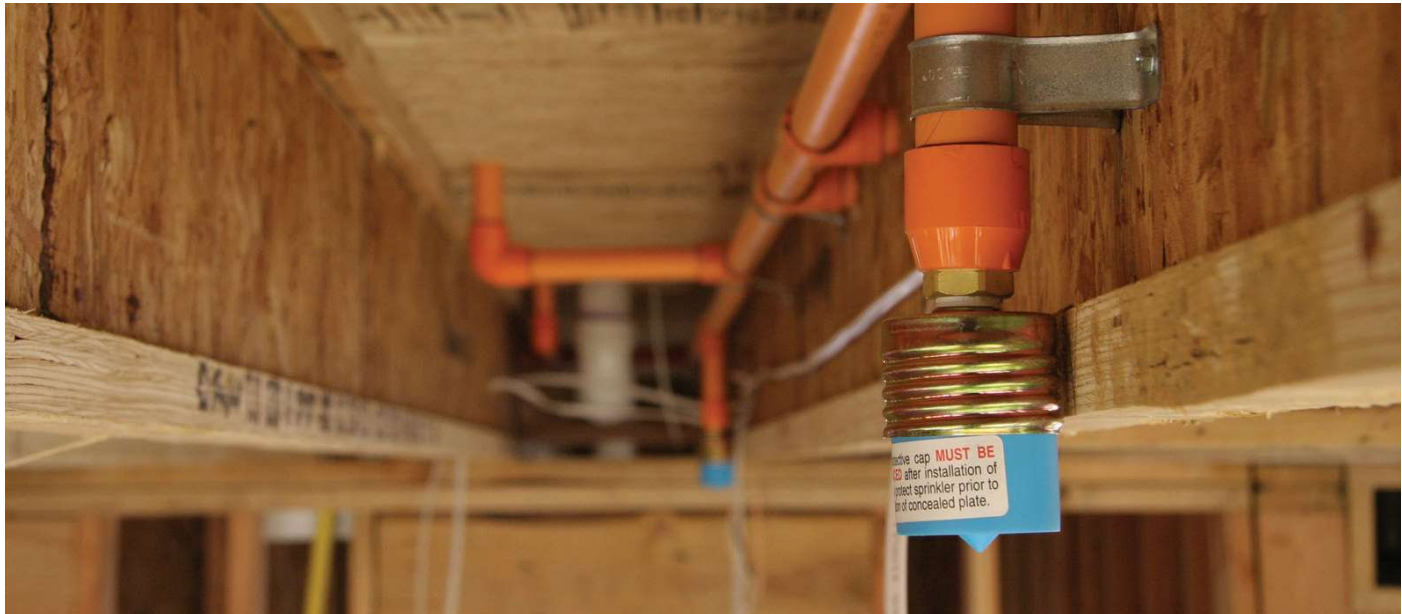

Features & Benefits

- BlazeMaster® CPVC is the most specified nonmetallic fire sprinkler piping system in the world
- cULus, FM, NSF & LPCB approved
- NEW! cULus Listed for exposed installations in unfinished basements in accordance with NFPA 13D
- NEW! cULus Listed for use embedded in concrete
- TYCO® BlazeMaster® fit for use in wet and dry systems

Peace of mind.

That's what you get when you choose TYCO® BlazeMaster® CPVC for your fire sprinkler system. Our broad portfolio of products offered in a wide range of sizes is backed by Johnson Controls' industry-leading 10-year warranty and the BlazeMaster® FBC™ System Compatible Program, the most robust compatibility program in the industry. Choose TYCO® BlazeMaster® CPVC when you want the job done right. Looking to save time and money on the jobsite? Try our new line of TYCO® Rapid Seal sprinkler head adapters. Designed to reduce installation time, the Rapid Seal Adapter's all-CPVC design eliminates the need for thread tape or sealant and provides an easy, leak-free installation. Simply hand-tighten and adjust with a wrench. Turn. Tighten. Done.

Learn more at www.tyco-fire.com

Looking for faster installations?

Rapid Seal Adapter Features:

- No thread tape or sealant
- No dezincification
- Available in various styles



CPVC products

Product	Size
Pipe	Offered in ¾" (19,05 mm) up to 3" (76,2 mm) diameters in standard 10ft. (3,05 m) and 15ft. (4,57 m) lengths; limited availability for 8ft. (2,44 m) lengths
Fittings	Broad range of configurations and styles offered in ¾" (19,05 mm) to 3" (50,8 mm) connections
NEW! Rapid Seal Adapter No need for thread tape or sealant	Straight and 90-degree elbow adapters offered in ¾" (19,05 mm) and 1" (25,4 mm) NPT connections; spigot adapter offered in 1" (25,4 mm) NPT connection
Accessories	Metal hangers, solvent cement, and other tools

CPVC Compatibility

Understanding CPVC compatibility is extremely important when installing your residential sprinkler system. To ease the burden associated with researching and selecting accompanying construction products, Lubrizol developed the FBC™ System Compatible Program.



Visit www.lubrizol.com/CPVC/FBC-System-Compatible-Program for more information and to view identified compatible and incompatible products.



Customer Service: Tel: 800.558.5236 • Fax: 800.877.1295
Technical Service: Tel: 800.381.9312 • Fax: 800.791.5500

Always refer to the Technical Data Sheet TFP1915 and TFP1925 for a complete description of all listing criteria, design parameters, installation instructions, care and maintenance guidelines, and our limited warranty.

www.tyco-fire.com