




National Fire Equipment Ltd.

WICK® 4200-14B VP

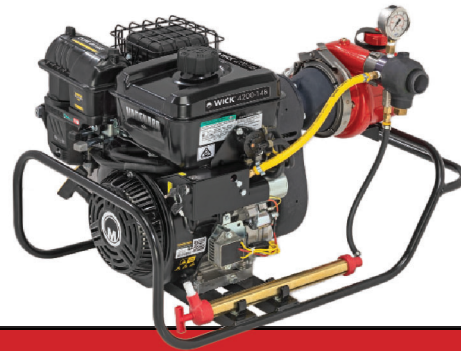

VALUE PROTECTION 4 STAGE HIGH PRESSURE FIRE PUMP


This pump is especially designed with value protection in mind offering such standard features as;

- Low pressure shut-off to protect the pump on loss of prime
- Remote fuel tank connection for extended run time
- Hand primer, poppet check valve and pressure gauge
- Electric start motor (battery not included)

Other features of this pump that make it the best performance 4 stage fire pump in it's class include the following;

- Powered by an 14 HP, 4 stroke, Briggs and Stratton Vanguard air cooled engine with over-speed protection
- Equipped with TransportGuard™ system which provides a simultaneous fuel/ ignition shut-off to protect the engine from oil/fuel dilution during transport
- Manual recoil backup
- Cyclonic air cleaner
- Standard High inclination engine which can work at up to 45 degree angle.
- Four stage foam compatible pump end, interchangeable with our 2 stage pump end for increased volume.
- Engine and pump are coupled with our stainless steel quick release clamp
- Maintenance-free (no oil) speed increaser
- Choice of hand carrying tube frame or a channel base frame for vehicle mount

WICK® 4200-14BS	
Part#	Description
71WK4203-14BTVP	WICK® 4200-14B Pumper ..14 HP 4 Stroke Briggs & Stratton , 4 stage pump, Tubular frame for easy transportation. Value Protection model

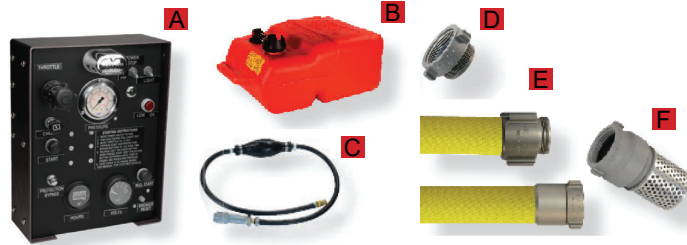

Options		
	Part#	Description
	A	71W42-2715 Large Control Panel
	B	70FLPFTXX Fuel Tank .. see fuel section for complete listing
	C	70FLPFL-XX Fuel line .. see fuel section for complete listing
	D	70FL15TPPS Thread protector 1 1/2" / 38mm
	D	70FL20TPPS Thread protector 2" / 51mm
	E	70FL20DLPS10 Draftlite HP suction hose .. 2"/51mm x 10'/3M c/w NPSH *
	F	70FLFV2PF Foot Valve / Strainer 2"/51mm NPSH Female *

*See website for complete listing of accessory and related products

WEIGHT & DIMENSIONS


Length	33.0"	84 cm
Width	18.5"	47 cm
Height	19.0"	48 cm
Weight	134 lbs	60.8 kg
Suction	2.0" NPSH	50 mm
Discharge	1.5" NPSH	38 mm

ENGINE


B&S Vanguard	4 stroke; 14 Hp @ 3600 RPM
Ignition	Electronic
Integral fuel Tank Capacity	1.51 US Gal. 5.74 L

Specifications subject to change without notice
Vanguard™ and TransportGuard™ are trademarks of Briggs and Stratton

WICK® S1300 PERFORMANCE

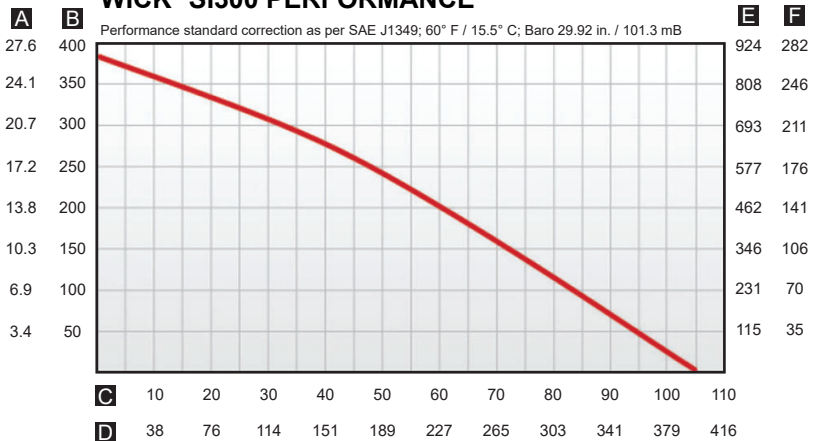

- A** Pressure in Bar **B** Pressure in PSI **C** Flow U.S. GPM
D Flow Liters / Min **E** Head Pressure Feet **F** Head Pressure Meters



TORONTO: (905) 761-6355
Toll Free: (800) 267-8508
OTTAWA: (613) 723-6071

VANCOUVER: (604) 420-1131
Toll Free: (800)-667-2138
BURNABY: (604)-299-4498

EDMONTON: (780) 455-3870
Toll Free: (888)-891-1008
CALGARY: (403) 236-5661

MONCTON: (506) 859-7277
Toll Free: (877) 816-3473
MISSISSAUGA: (905) 565-1385

www.nationalfire.com