



APPLICATION

The Pressure-Tru™ Z3000 and Z3005 Series Pressure Reducing Valve is listed as a standpipe valve for individual hose stations in CLASS I and CLASS III systems. Regulates pressure under both FLOW and NO-FLOW conditions. Can be adjusted and set at the factory or set in the field without draining the standpipe riser.

STANDARDS COMPLIANCE

- UL® Listed
- C-UL® Listed
- City of Los Angeles Approved
- NYC MEA 37-95-E

MATERIAL

Main valve body Cast bronze ASTM B 584
 Stem Silicon bronze ASTM B 584
 Flange Navy "G" bronze ASTM B 584
 Elastomers Buna Nitrile (FDA approved)
 EPDM (FDA approved)
 Springs Chrome silicon, ASTM A 313 powder coated

OPTIONS


(Suffixes can be combined)

- ☒ Z3000 - angle type valve
- ☒ IL - in-line (globe type) valve
- ☒ G - with grooved inlet
- ☒ SF - with San Francisco hose thread (3")
- ☒ C/C - with cap and chain
- ☒ CH - with chrome finish
- ☒ ST - with special hose thread
- ☒ Z3005 - female NPT inlet and outlet angle valve
- ☒ IL - female NPT inlet and outlet in-line valve
- ☒ CAP - with capped bonnet
- ☒ CH - with chrome finish



Z3000 C/C

Z3005

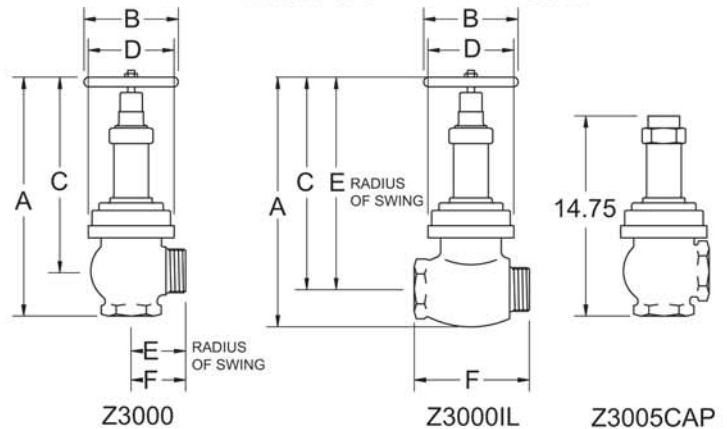

FEATURES

Sizes: ☒ 2 1/2"
 Maximum inlet pressure 400 psi
 Inlet connection (Z3000) FNPT or Groove
 Inlet connection (Z3005) FNPT
 Outlet connection (Z3000) Male hose
 Outlet connection (Z3005) FNPT
 Manufactured in the USA
 Factory or Field Set







DIMENSIONS & WEIGHTS (do not include pkg.)

MODEL	DIMENSIONS (approximate)																	
	A OPEN		A CLOSED		B		C OPEN		C CLOSED		D		E		F		WEIGHT	
	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	lbs	kg
Z3000	17 1/2	445	16 1/2	419	6 1/4	159	14 1/2	368	13 1/2	343	5 3/4	146	3 1/2	89	3	76	28	12.7
Z3000IL	17 1/2	445	16 1/2	419	6 1/4	159	14 1/2	368	13 1/2	343	5 3/4	146	14 1/2	368	7 1/2	191	30	13.6
Z3000G	17 1/2	445	16 1/2	419	6 1/4	159	14 1/2	368	13 1/2	343	5 3/4	146	3 1/2	89	3	76	29	13.6
Z3000ILG	17 1/2	445	16 1/2	419	6 1/4	159	14 1/2	368	13 1/2	343	5 3/4	146	14 1/2	368	8 3/4	222	30	13.6
Z3005	17 1/2	445	16 1/2	419	6 1/4	159	14 1/2	368	13 1/2	343	5 3/4	146	3 1/2	89	3	76	29	13.2
Z3005IL	17 1/2	445	16 1/2	419	6 1/4	159	14 1/2	368	13 1/2	343	5 3/4	146	14 1/2	368	7 1/2	191	30	13.6

Residual Pressure Charts

For Pressure-Tru™ 2 1/2" Angle Valves

Models: Z3000, Z3004, Z3005, Z3000G & Z3004G

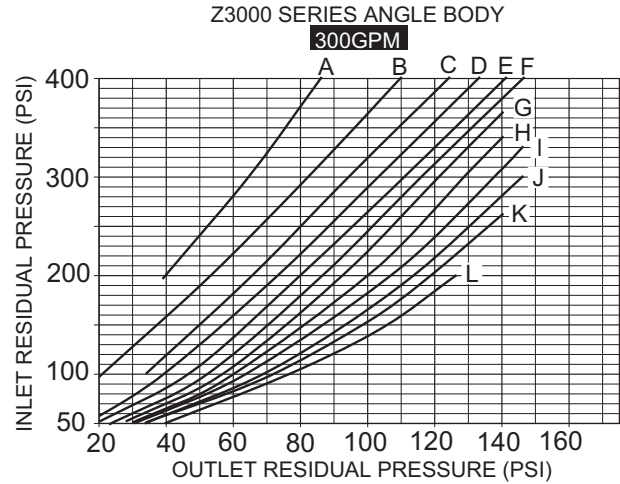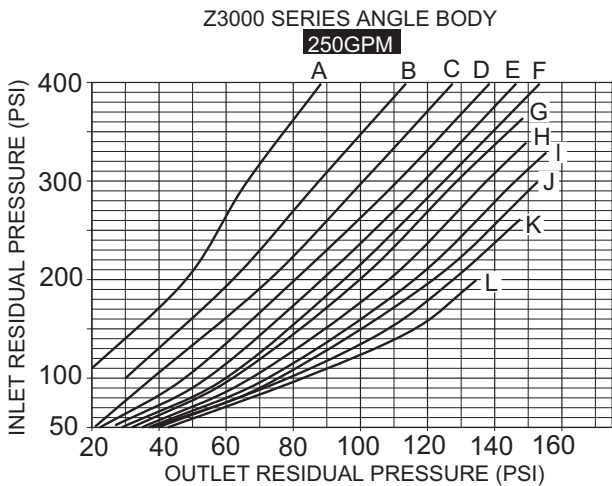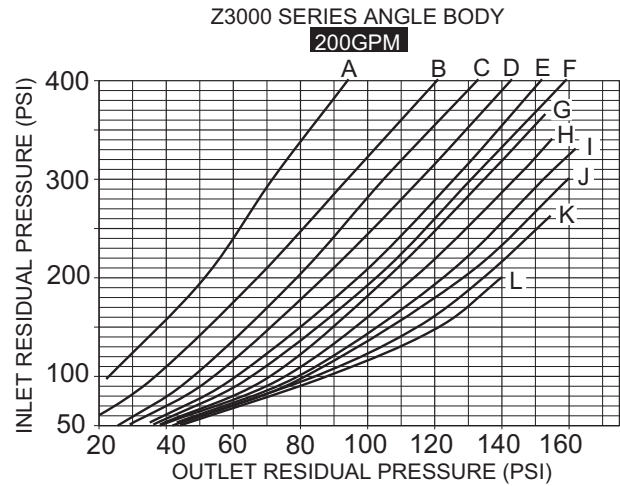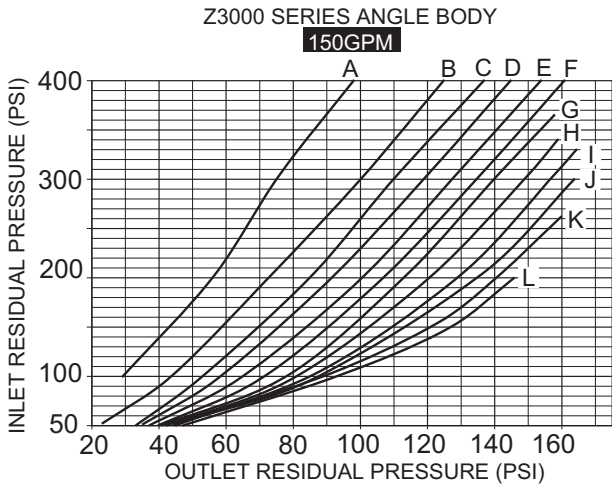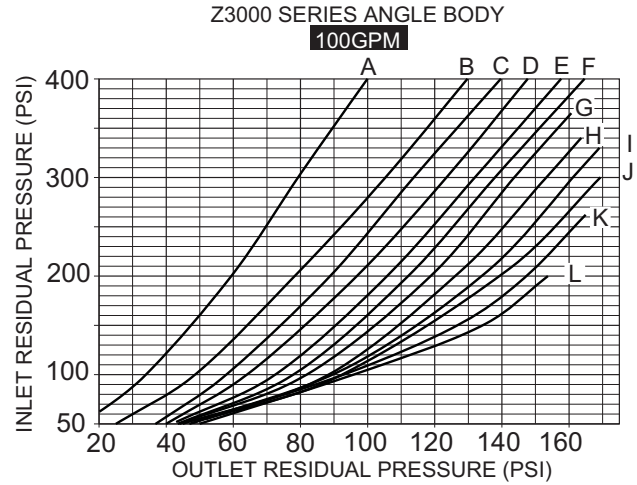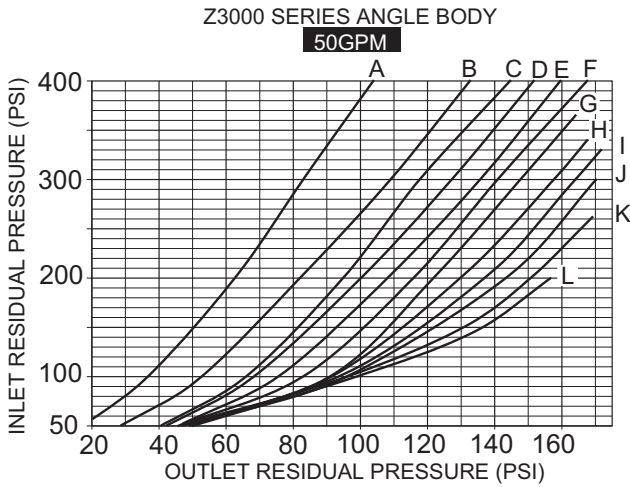

"A" DIMENSION SETTINGS (inches)

A	B	C	D	E	F	G	H	I	J	K	L
3/8	1/2	5/8	11/16	3/4	13/16	7/8	15/16	1	1-1/16	1-1/8	1-3/16

Note: Curve accuracy = ± 5 PSIG

WILKINS a Zurn company, 1747 Commerce Way, Paso Robles, CA 93446 Phone: 805-238-7100 Fax: 805-238-5766





IN CANADA: ZURN INDUSTRIES LIMITED, 3544 Nashua Dr., Mississauga, Ontario L4V 1L2 Phone: 905-405-8272 Fax: 905-405-1292

Product Support Help Line: 877-BACKFLOW (877-222-5356) • Website: <http://www.zurn.com>

Residual Pressure Charts

For Pressure-Tru™ 2 1/2" Angle Valves


Models: Z3000, Z3004, Z3005, Z3000G & Z3004G

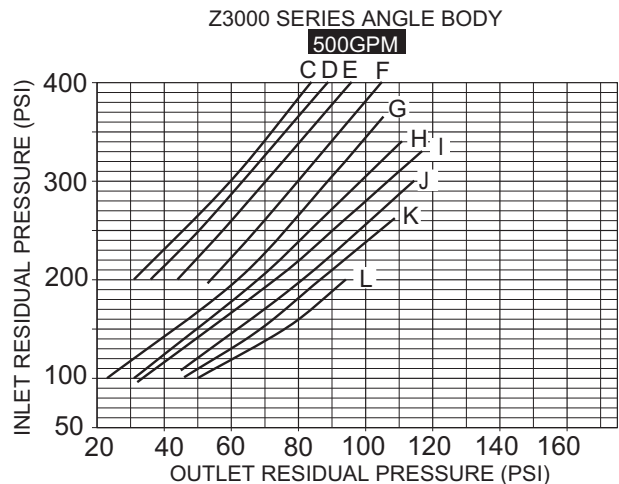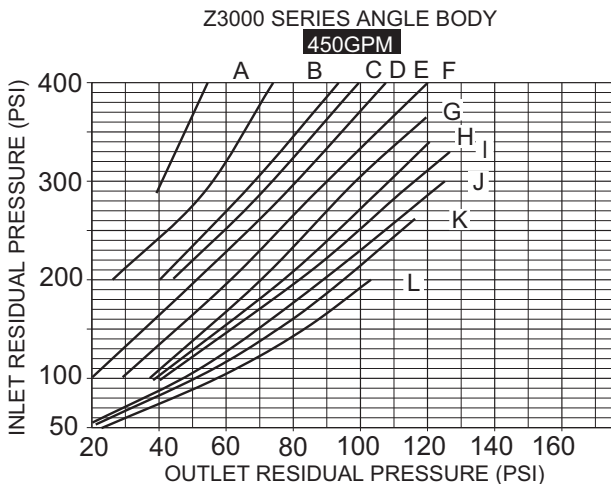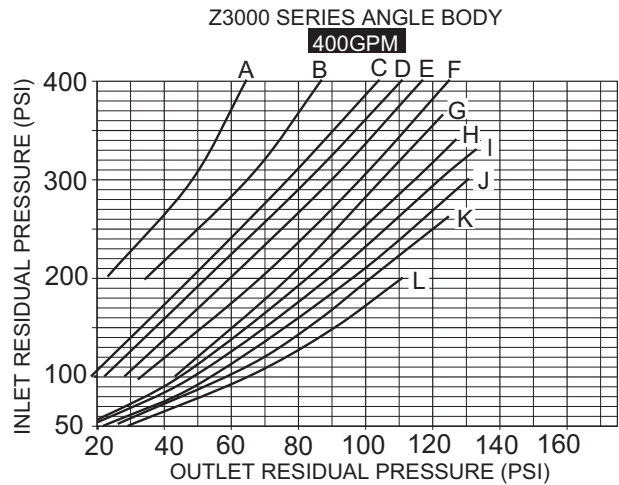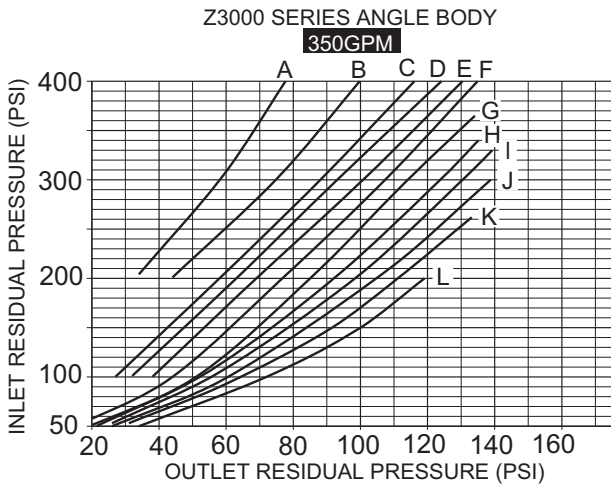

STATIC PRESSURE CHART

For Pressure-Tru™
Angle and In-line Valves
(2-1/2" Inlet and Outlet)

MODELS:
Z3000, Z3004 & Z3005
(All)

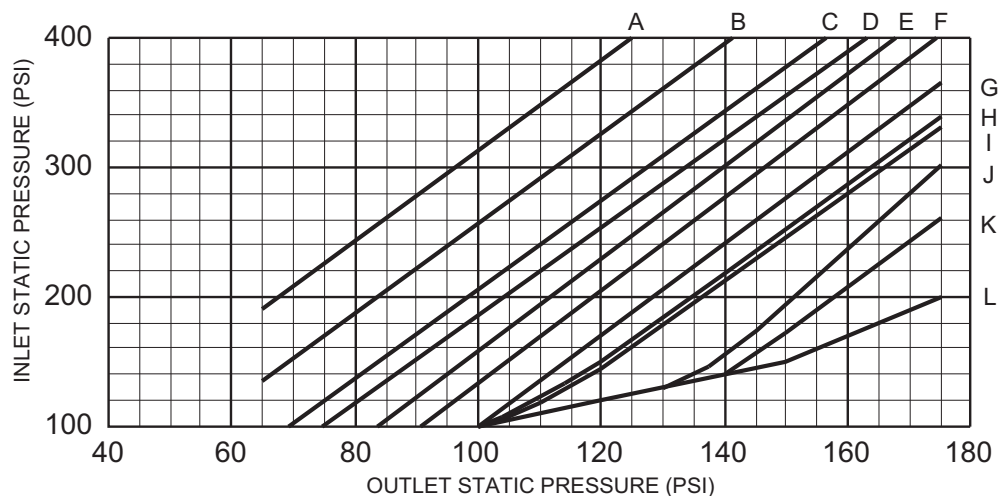







"A " DIMENSION SETTINGS (inches)											
A	B	C	D	E	F	G	H	I	J	K	L
3/8	1/2	5/8	11/16	3/4	13/16	7/8	15/16	1	1-1/16	1-1/8	1-3/16

Note: Curve accuracy= ± 5 PSIG

Residual Pressure Charts

For Pressure-Tru™ 2 1/2" In-line Valves

Models: Z3000IL, Z3004IL & Z3005IL

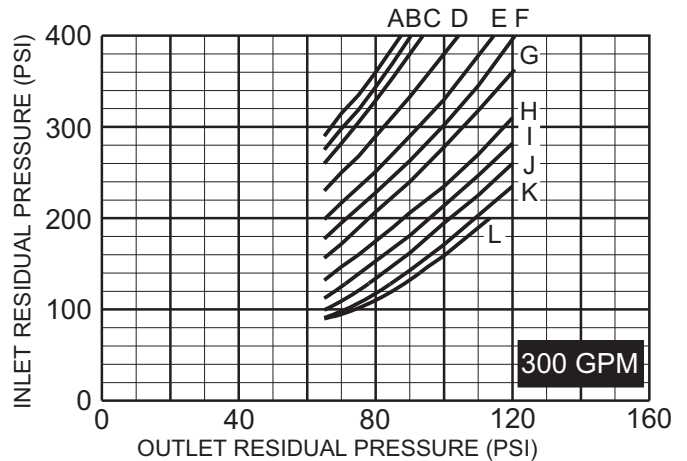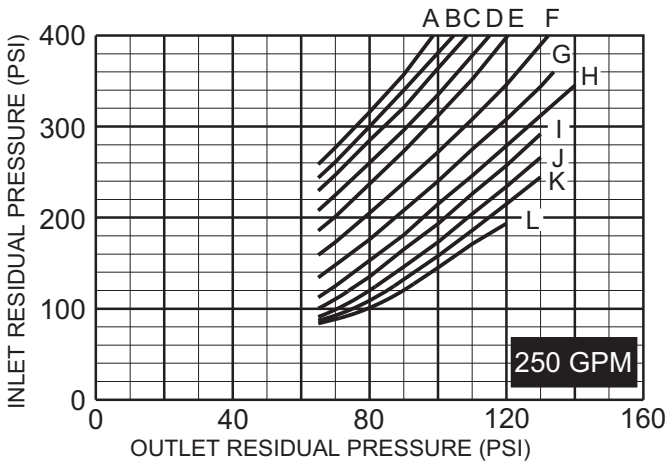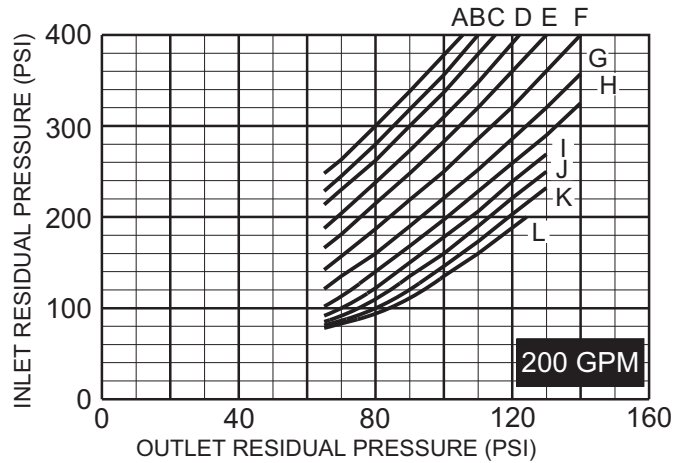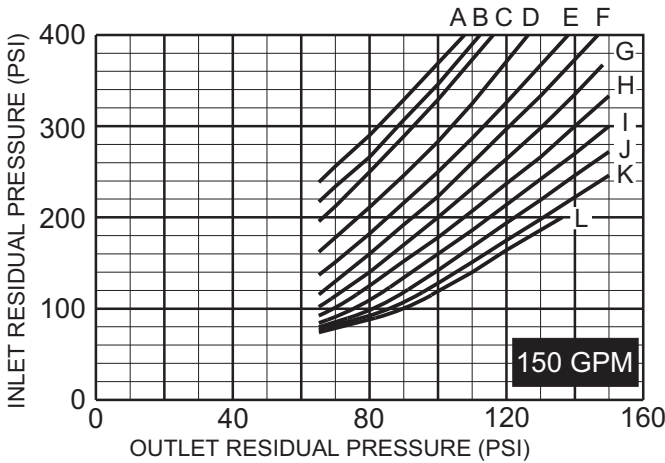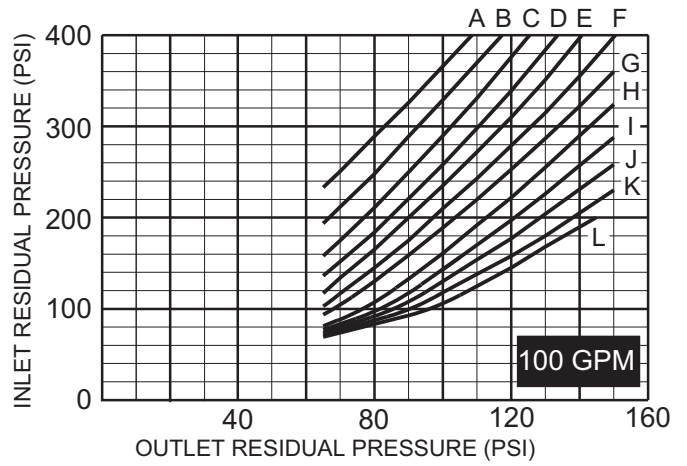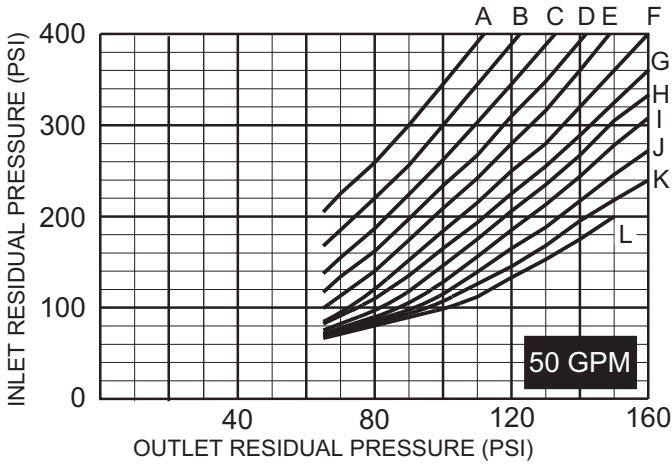





"A" DIMENSION SETTINGS (inches)											
A	B	C	D	E	F	G	H	I	J	K	L
3/8	1/2	5/8	11/16	3/4	13/16	7/8	15/16	1	1-1/16	1-1/8	1-3/16

Note: Curve accuracy= ± 5 PSIG

Residual Pressure Charts

For Pressure-Tru™ 2 1/2" In-line Valves


Models: Z3000IL, Z3004IL & Z3005IL

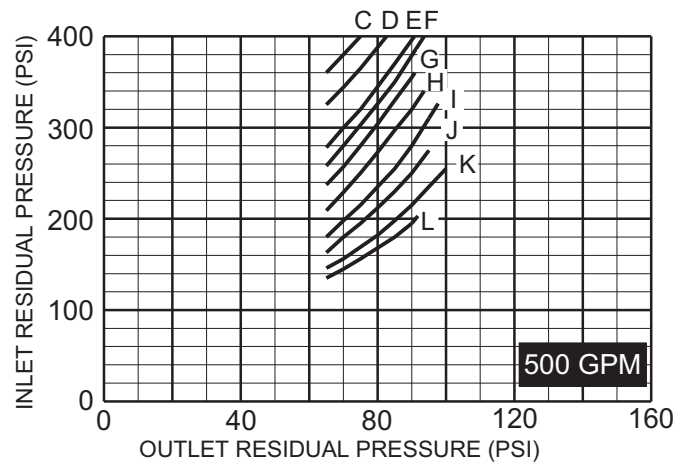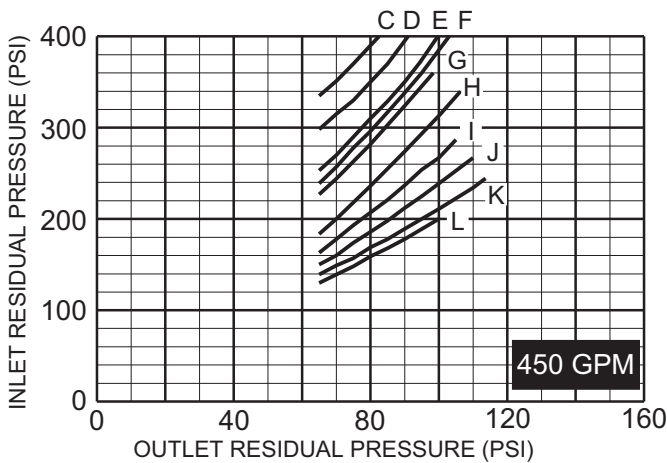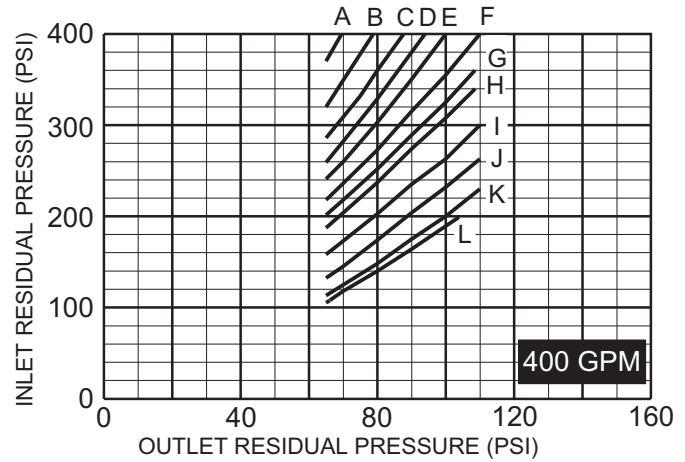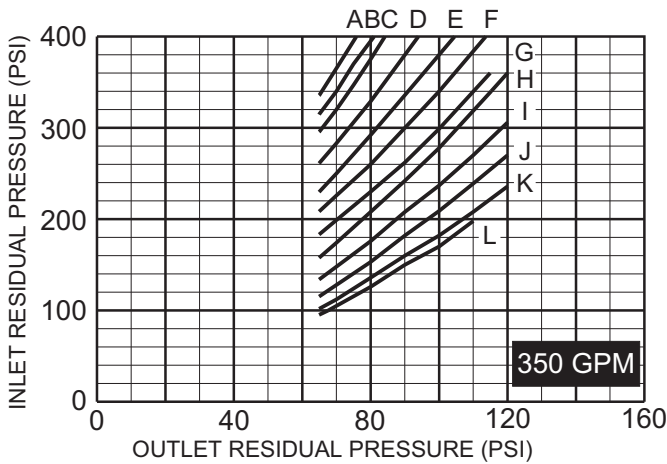

STATIC PRESSURE CHART

For Pressure-Tru™
Angle and In-line Valves
(2-1/2" Inlet and Outlet)

MODELS:
Z3000, Z3004 & Z3005
(All)

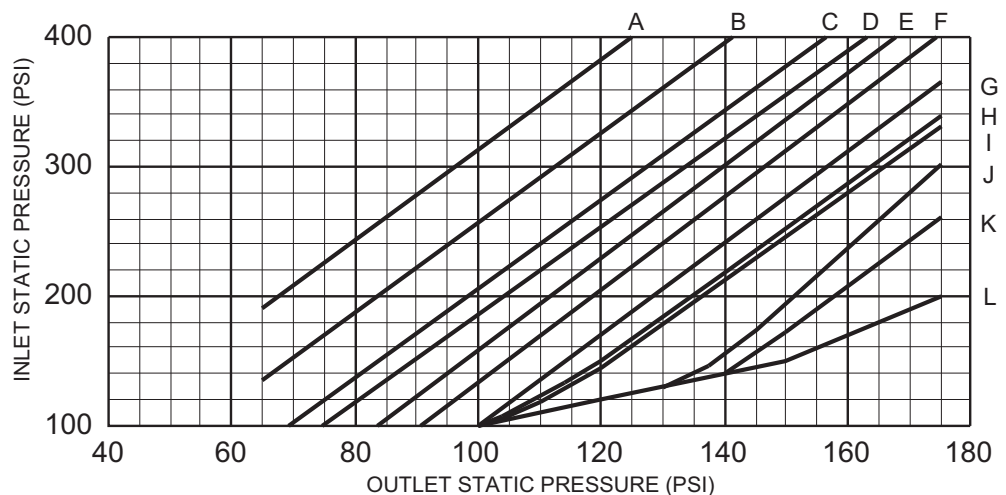

"A" DIMENSION SETTINGS (inches)


A	B	C	D	E	F	G	H	I	J	K	L
3/8	1/2	5/8	11/16	3/4	13/16	7/8	15/16	1	1-1/16	1-1/8	1-3/16

Note: Curve accuracy = ± 5 PSIG


Residual Pressure Charts

For Pressure-Tru™ 2 1/2" In-line Grooved Valves
Models: Z3000ILG & Z3004ILG


Z3000 SERIES INLINE BODY GROOVED
50GPM

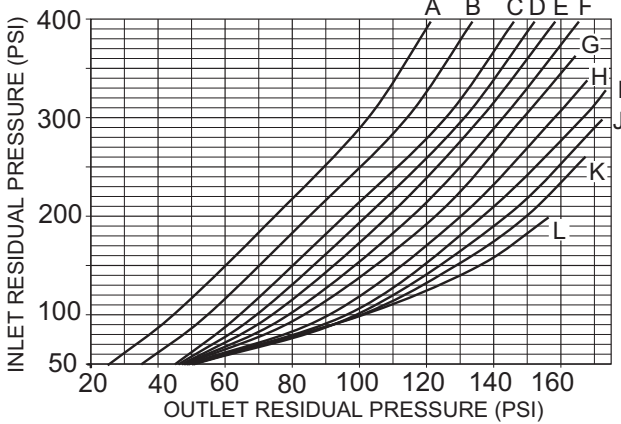


Z3000 SERIES INLINE BODY GROOVED
100GPM

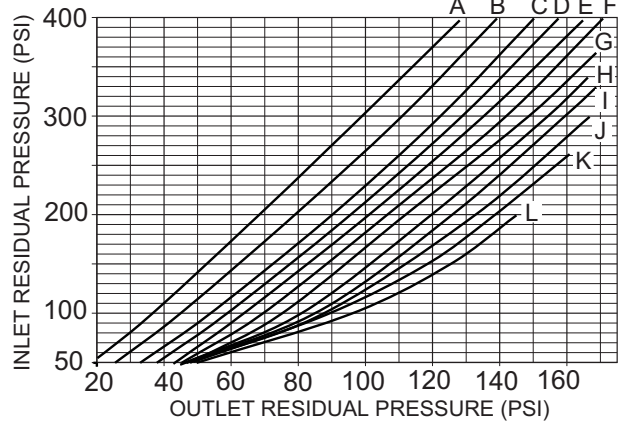


Z3000 SERIES INLINE BODY GROOVED
150GPM

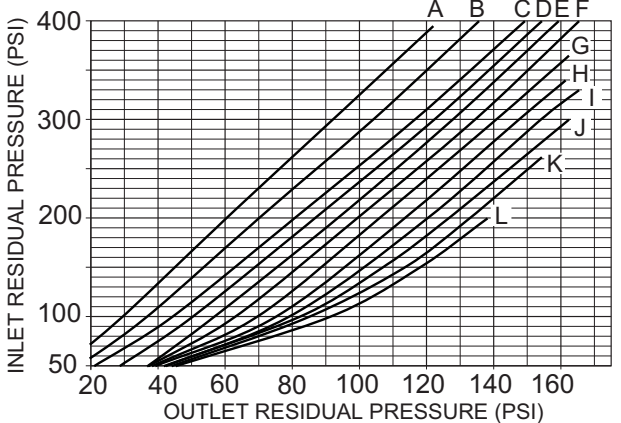


Z3000 SERIES INLINE BODY GROOVED
200GPM

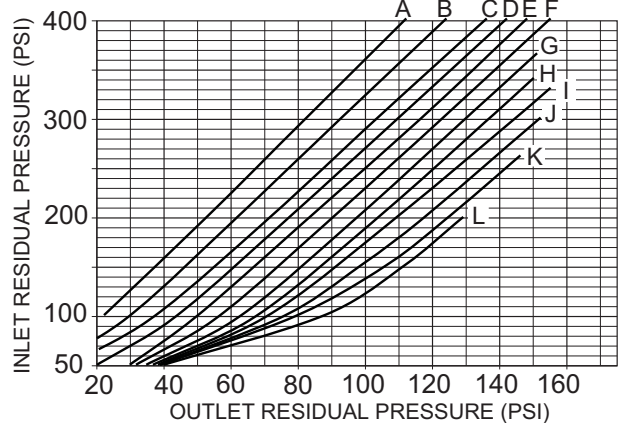

Z3000 SERIES INLINE BODY GROOVED
250GPM

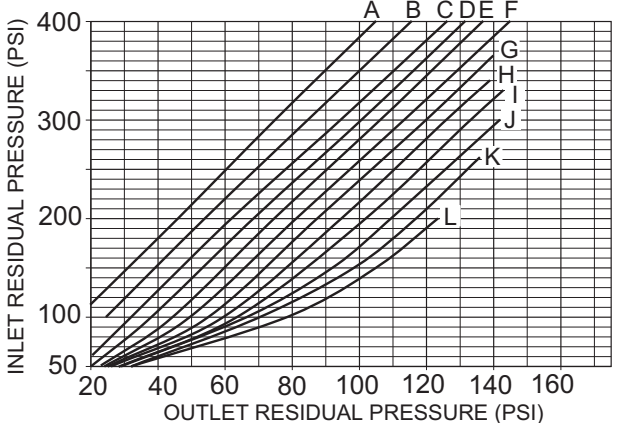

Z3000 SERIES INLINE BODY GROOVED
300GPM

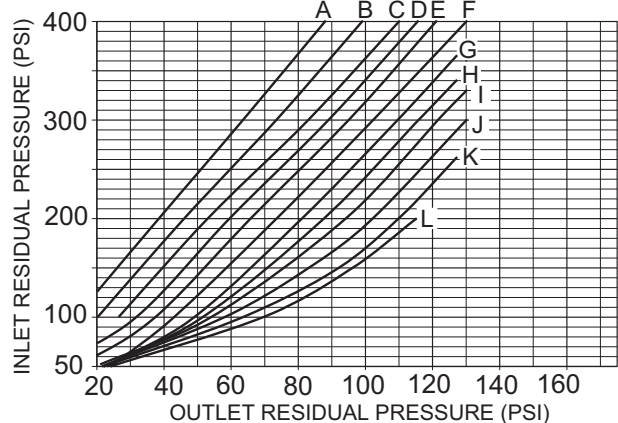

"A" DIMENSION SETTINGS (inches)

A	B	C	D	E	F	G	H	I	J	K	L
3/8	1/2	5/8	11/16	3/4	13/16	7/8	15/16	1	1-1/16	1-1/8	1-3/16

Note: Curve accuracy= ± 5 PSIG


Residual Pressure Charts

For Pressure-Tru™ 2 1/2" In-line Grooved Valves

Models: Z3000ILG & Z3004ILG


Z3000 SERIES INLINE BODY GROOVED

350GPM

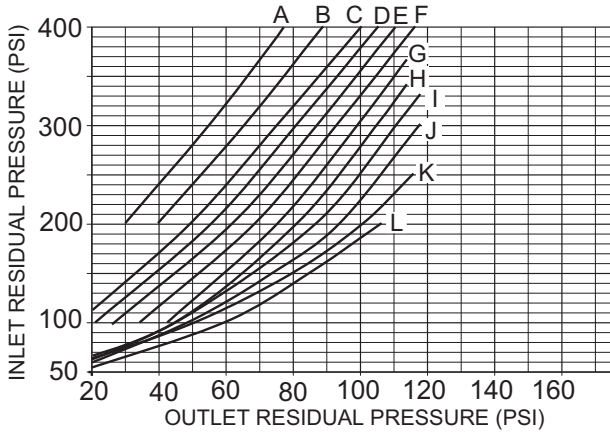


Z3000 SERIES INLINE BODY GROOVED

400GPM

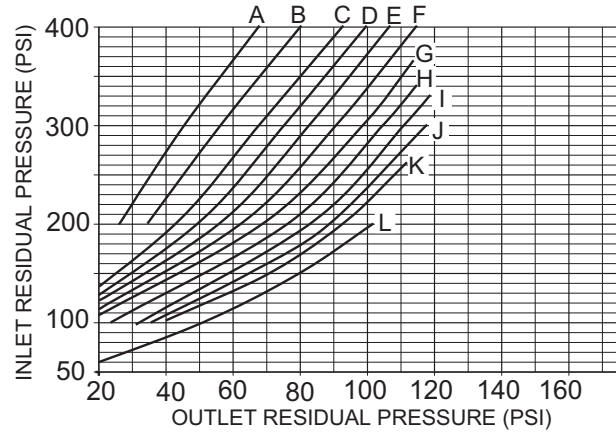


Z3000 SERIES INLINE BODY GROOVED

450GPM

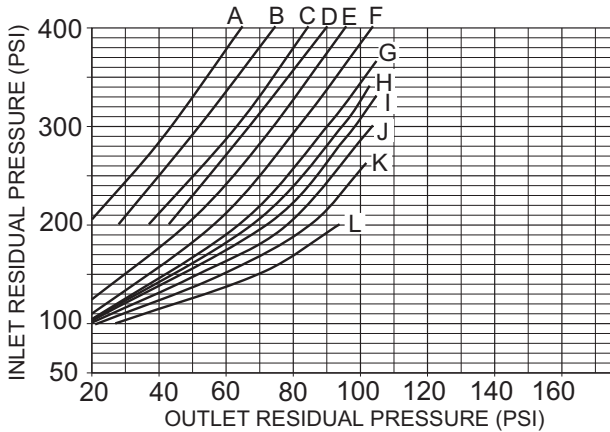

Z3000 SERIES INLINE BODY GROOVED


500GPM

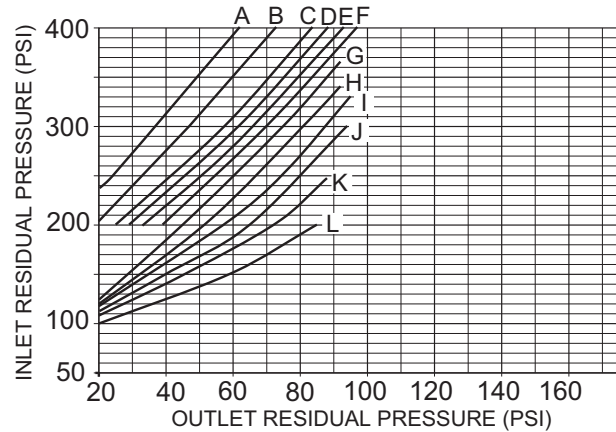

STATIC PRESSURE CHART

For Pressure-Tru™
Angle and In-line Valves
(2-1/2" Inlet and Outlet)

MODELS:
Z3000, Z3004 & Z3005
(All)

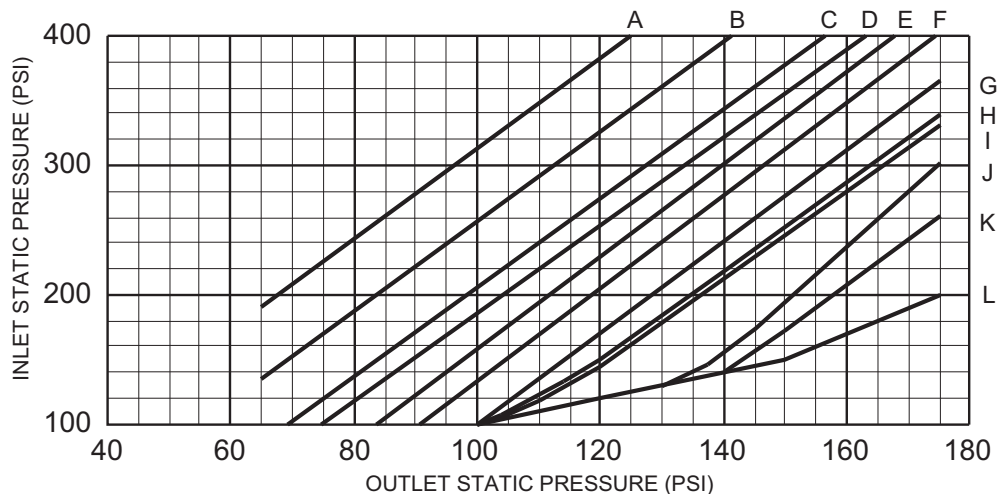

"A" DIMENSION SETTINGS (inches)

A	B	C	D	E	F	G	H	I	J	K	L
3/8	1/2	5/8	11/16	3/4	13/16	7/8	15/16	1	1-1/16	1-1/8	1-3/16

Note: Curve accuracy = ± 5 PSIG

WILKINS a Zurn company, 1747 Commerce Way, Paso Robles, CA 93446 Phone: 805-238-7100 Fax: 805-238-5766

IN CANADA: ZURN INDUSTRIES LIMITED, 3544 Nashua Dr., Mississauga, Ontario L4V 1L2 Phone: 905-405-8272 Fax: 905-405-1292

Product Support Help Line: 877-BACKFLOW (877-222-5356) • Website: <http://www.zurn.com>

ZW3000 Series Fire Valve Part Number Assistant



Check off the boxes that match the choices you want. If the choice is blank, this is standard and you add nothing to the part number. If there are letters after the check box, then you add those letters to the part number in that order from left to right.

The flow curves **Must** be used by the system designer to select the correct bonnet setting.

Example
2-1/2" Z3004 Sprinkler Floor Control Valve (Adjustable)

<input type="checkbox"/> Angle Body	<input type="checkbox"/> Threaded Ends	<input checked="" type="checkbox"/> SS Supervisory Switch	
<input type="checkbox"/> Globe Body	<input type="checkbox"/> Grooved Ends	Monitor Switch No Handwheel	Rough
<input checked="" type="checkbox"/> IL	<input checked="" type="checkbox"/> G	Adapter Bracket Capped Bonnet	Chrome Plated
(choose one)	(choose one)	<input type="checkbox"/> MSA <input type="checkbox"/> CAP	<input type="checkbox"/> CH
		(choose one or none)	(optional)

In this example the part number would be ZW4004ILMSA-T

2-1/2" Z3000 Standpipe Hose Valve (Adjustable)

<input type="checkbox"/> Angle Body	<input type="checkbox"/> Threaded Inlet	<input type="checkbox"/> 2-1/2" National Hose thread	
<input type="checkbox"/> Globe Body	<input type="checkbox"/> Grooved Inlet	<input type="checkbox"/> 3" Hose thread	Rough Chrome Plated
<input type="checkbox"/> IL	<input type="checkbox"/> G	Special Thread w/Cap & Chain	<input type="checkbox"/> CH
(choose one)	(choose one)	<input type="checkbox"/> SF <input type="checkbox"/> CC	(optional)
		<input type="checkbox"/> ST _____	
	Specify special thread	(choose one)	

2-1/2" Z3005 Hose Rack Valve (Adjustable)

<input type="checkbox"/> Angle Body			Rough Chrome Plated
<input type="checkbox"/> Globe Body		<input type="checkbox"/> NPT Threaded Outlet	
<input type="checkbox"/> IL			<input type="checkbox"/> CH
(choose one)			(optional)

2-1/2" Z3004 Sprinkler Floor Control Valve (Adjustable)

<input type="checkbox"/> Angle Body	<input type="checkbox"/> Threaded Ends	<input type="checkbox"/> SS Supervisory Switch	
<input type="checkbox"/> Globe Body	<input type="checkbox"/> Grooved Ends	Monitor Switch No Handwheel	Rough Chrome
<input type="checkbox"/> IL	<input type="checkbox"/> G	Adapter Bracket Capped Bonnet	Chrome Plated
(choose one)	(choose one)	<input type="checkbox"/> MSA <input type="checkbox"/> CAP	<input type="checkbox"/> CH
		(choose one or none)	(optional)

Specify if the body should be tapped and plugged for gauges.

Qty	Part number	Notes