



National Fire Equipment Ltd.

Aspirating Smoke Detector | TITANUS MICRO·SENS®

ROOM·IDENT Version

TITANUS® aspirating smoke detector

The TITANUS® family of aspirating smoke detectors covers standard to very early warning fire detection as well as a wide range of extreme applications without compromising high levels of sensitivity and performance.



Technology

TITANUS MICRO·SENS® is WAGNER's air sampling smoke detector for monitoring enclosures and small to medium-sized areas of up to 4,305 ft². It combines High- Power-Light-Source (HPLS) technology with patented LOGIC·SENS™ fire pattern recognition algorithms and a large portfolio of custom accessories to ensure that each system will maintain high levels of sensitivity and false alarm immunity even in challenging environments.

TITANUS MICRO·SENS® comes with dry contacts for connection to any fire panel.

Advantage

- Individual smoke indication for up to 5 separate enclosures or rooms using one straight pipe run.
- High reliability and extended service life due to physical separation of disturbing influences such as dust, vapor or radiation from the measuring chamber.
- TITANUS® PipeXpress software for highly reliable ASD planning with just a few mouse clicks.
- Time-saving Installation and commissioning thanks to plug & play philosophy.
- Discreet installation for maintaining aesthetics and providing safety against vandalism.
- Intelligent diagnostics tool gives support at inspection and service.


Features

- Coverage up to 4,305 ft² (400 m²)
- ROOM·IDENT function provides individual smoke indication for up to 5 separate enclosures or rooms
- High-Power-Light-Source (HPLS) for standard to very high sensitivity
- LOGIC·SENS™ for very high immunity to false alarms
- PIPE·GUARD patented air flow monitoring system, sensing changes in total airflow as little as +/- 10 %
- Up to 131 ft (40 m) pipe length and up to 5 holes
- With a wide range of accessories for special applications
- 2 alarm levels for tiered alerting option
- Optional bar graph smoke level display
- Optional Ethernet (TCP/IP) / SNMP / data logger
- Operating temperature: -4 °F to +140 °F (-20 °C to +60 °C)
- Also available as TITANUS MICRO·SENS® standard and cold storage version

Approvals



Additional approvals on request and / or at www.wagnergroup.com



TORONTO: (905) 761-6355
Toll Free: (800) 267-8508

VANCOUVER: (604) 420-1131
Toll Free: (800)-667-2138

EDMONTON: (780) 455-3870
Toll Free: (888)-891-1008

MONCTON: (506) 859-7277
Toll Free: (877) 816-3473

OTTAWA: (613) 723-6071

BURNABY: (604)-299-4498

CALGARY: (403) 236-5661

MISSISSAUGA: (905) 565-1385


www.nationalfire.com



National Fire Equipment Ltd.

Aspirating Smoke Detector | TITANUS MICRO-SENS®

TITANUS MICRO-SENS® | Components

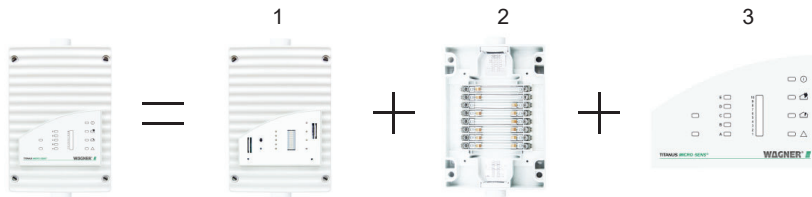

The aspirating smoke detector consists of the detection unit (1), a device base (2) and an adhesive front film sheet (3).

TITANUS MICRO-SENS®

System	TITANUS MICRO-SENS® High Sensitivity	TITANUS MICRO-SENS® Normal Sensitivity
1 Basic Device		
Type ("B" is bargraph option)	DM-TMV-R(B)-10-U	DM-TMV-R(B)-50-U
Max. Main Alarm Sensitivity	0.03 % obsc./ft (0.10 % obsc./m)	0.15 % obsc./ft (0.50 % obsc./m)
No. of Detector Modules (Zones)		1 or 2
Max. No. of Aspiration Holes		5
Max. Area of Coverage		4,305 ft ² (400 m ²)
Max. Pipe Length		131 ft (40 m)
Cross-Zoning Alarm Verification		optional with detector box
No. of Alarm Levels per Zone		2
No. of Output Relays (1 A / 30 VDC)		2 (alarm: n.o.; fault: n.c.), additional relays optional ⁽¹⁾
Front Indicators		Alarm, Pre-Alarm, Fault; Operation; Room Indicators (5); optional Bar Graph (smoke level)
Remote Indicators		optional ⁽²⁾
Ethernet / SNMP / Data Logger (SD Card)		optional ⁽³⁾
Binary Data Logger		standard
Supply Voltage		24 V DC (16 to 30 V DC)
Current Consumption ⁽⁴⁾		
Operational		105 mA
Alarm without bar graph		110 mA
Alarm with bar graph		140 mA
Operating Temperature		-4 °F to +140 °F (-20 °C to +60 °C)
Humidity Range		10 % to 95 % (noncondensing)
Sound Pressure Level (ISO 3744)		as low as 40 dB(A)
Dimensions		2.9 x 5.5 x 8.7 inches (70 x 140 x 222 mm)
Weight (Basic Configuration)		1.04 lb (470 g)
Pipe Specification		63 / 64 inches (25 mm)
IP Rating		IP 54

2 Detector Modules

Type	HB-TM
Weight	0.93 lb (420 g)

3 Adhesive Front Film Sheets

Type for devices without bargraph	FW-TMV-R
Type for devices with bargraph	FW-TMV-RB

(1) Relay boards providing 5 additional relays each: RU-1 (for ROOM IDENT), RU-2 (for pre-alarm), external housing required

(2) Remote response indicators type DJ-TM for indicating the effected room or enclosure

(3) Network Module with (without) Data Logger: NU-2-D (NU-2); Data Logger only: NU-2-DO

(4) At 9 V standard fan voltage, 24 V DC supply voltage