






National Fire Equipment Ltd.

BICO® HOSE

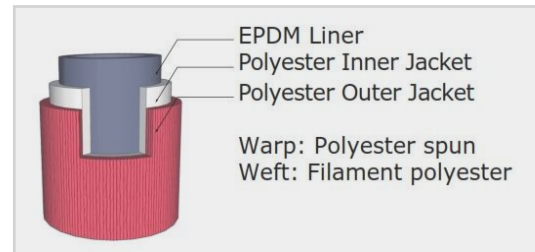

Bico® double jacket hose is constructed of high tensile strength polyester yarn, lined with a high-tech EPDM tube. The engineered design guarantees minimum weight with maximum durability and flexibility. The jacket is evenly and firmly woven and free from visible defects, thread knots, lumps or irregularities of twist. Manufactured in accordance with National Fire Protection Association (NFPA) 1961 standard, latest edition, within an ISO-9001:2008 certified quality assurance system. The polyester construction is mildew & rot-proof, with outstanding abrasion resistance and an innovative INCAP coating.

National Fire's Bico® hose is tough, dependable and lightweight.

I.D. (Inches)	Service Test Pressure (Psi)	Burst Pressure (Psi)	Certification
1-1/2"	400	1200	
1-3/4"	400	1200	
2"	400	1200	
2-1/2"	400	1200	
I.D. (Inches)	Service Test Pressure (Psi)	Burst Pressure (Psi)	Certification
1-1/2"	300	900	
2-1/2"	300	900	

Construction: Double jacket, polyester spun as warp and filament polyester as weft/filler, EPDM inner liner.

Application: Fire departments or industrial use

Color: White

Couplings: Brass/Aluminum, expansion ring threaded coupling, other types on request.

Standard Length: 50', 75', 100'. *Please inquire for availability.*