



National Fire Equipment Ltd.

WBAL ALUMINUM INSULATED ACCESS DOOR & WBALU ALUMINUM UNINSULATED ACCESS DOOR




Model No.	A x B Door Size	Cam Latch	Shipping Weight (lbs) Steel/Stainless
WBAL-88	8"x8"	1	3.5
WBAL-1212	12"x12"	3	6
WBAL-1616	16"x16"	3	9
WBAL-1818	18"x18"	3	15
WBAL-2424	24"x24"	4	24
WBAL-2436	24"x36"	5	45

Rough wall opening = door size + 1/4"


Door and Trim	.063 Aluminum, trim 1 1/2" wide
Return Frame	.063 Aluminum, depth of 2"
Hinge	Continuous rod hinge
Latches	Flush aluminum steel cam
Insulation	1" AMVIC SilveRboard Ridge Foam Insulation with a R5 Value
Gasket	Neoprene gasket included on 4 sides
Finish	Mill finish
Options (at extra cost)	Key medium barrel cylinder Lock with key (code 151)

The WBAL Aluminum Insulated Access Door is a light weight insulated aluminum access door. It is ideal for exterior applications, and also those specific interior applications where corrosion or moisture is a concern. The aluminum panel is insulated with 1" SilveRboard Ridge Foam Insulation. Access to large openings in walls and ceilings is made easy. The non-extruded door frame has the same visual aesthetic design as the UAD door. Weather resistant neoprene gasketing is installed on 4 sides.

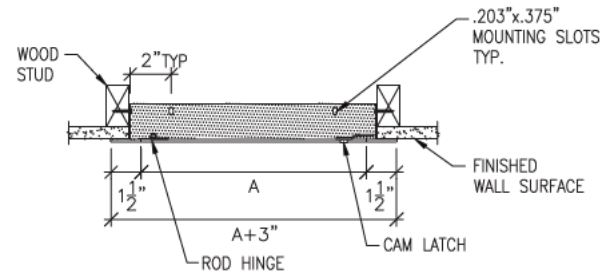


Door and Trim	.060 Aluminum, trim 1 3/4" wid
Return Frame	.060 Aluminum, depth of 1 1/16"
Hinge	Full length piano hinge
Latches	Flush aluminum cam
Finish	White powder coat paintable finish
Options (at extra cost)	<ul style="list-style-type: none"> • Key cylinder lock with key (code 151) • Neoprene Gasketing

The WB-ALU Uninsulated Aluminum Access Door is a lightweight aluminum access door for wall and ceiling application. Its surround trim is welded on all 4 sides to the return frame providing strength and rigidity. It features radius corners and no corner mitering. Its aesthetic appearance makes it an architect favorite.

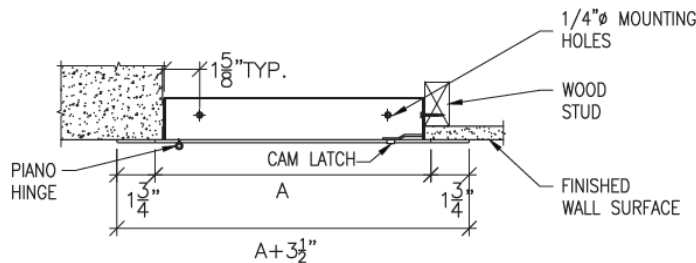

Model No.	A x B Door Size	Cam Latch	Shipping Weight (lbs) Steel/Stainless
WBALU-66	6"x6"	1	2.5
WBALU-88	8"x8"	1	3.5
WBALU-812	8"x12"	1	5
WBALU-1010	10"x10"	1	5
WBALU-1212	12"x12"	1	6
WBALU-1216	12"x16"	3	7.5
WBALU-1218	12"x18"	3	8
WBALU-1224	12"x24"	3	10
WBALU-1414	14"x14"	3	7.5
WBALU-1616	16"x16"	3	9
WBALU-1818	18"x18"	3	15
WBALU-1824	18"x24"	4	13
WBALU-1836	18"x36"	5	29
WBALU-2020	20"x20"	3	19
WBALU-2222	22"x22"	4	21
WBALU-2230	22"x30"	5	27
WBALU-2236	22"x36"	5	30
WBALU-2424	24"x24"	4	24
WBALU-2430	24"x30"	4	28
WBALU-2436	24"x36"	5	32
WBALU-2448	24"x48"	6	40
WBALU-3030	30"x30"	6	34
WBALU-3636	36"x36"	9	45
WBALU-3648	36"x48"	10	57
WBALU-4848	48"x48"	12	70

Rough wall opening = door size + 1/4"



TORONTO: (905) 761-6355
Toll Free: (800) 267-8508

VANCOUVER: (604) 420-1131
Toll Free: (800)-667-2138

EDMONTON: (780) 455-3870
Toll Free: (888)-891-1008

MONCTON: (506) 859-7277
Toll Free: (877) 816-3473

OTTAWA: (613) 723-6071

BURNABY: (604)-299-4498

CALGARY: (403) 236-5661

MISSISSAUGA: (905) 565-1385

www.nationalfire.com