

National Fire Equipment Ltd.


WBFR BASIC UNINSULATED FIRE RATED ACCESS DOOR




The WB-FR Basic Uninsulated Fire Rated Access Door is designed for wall application only. It is not insulated and should only be installed in environments where temperature rise is not a concern. It features a 1 1/2" trim for an easy flush application into various wall finishes. UL Listed "B" label for 1-1/2 hours. File # R10364C UL US.



Door and Trim	14 ga. cold rolled steel	
Box Return Frame	16 ga. cold rolled steel, 2 1/2" deep frame	
Hinge	180° full length piano hinge	
Latch	Self latching lock with key and knurled knob	
Automatic Door Closer	Standard on all doors	
Inside Release Latch	Standard on all doors	
Finish	White powder coat paintable finish	
Options (at extra cost)	 Mortise lock preparation Stainless steel #304 and #316 (#4 satin finish) Masonry anchor straps Custom sizes available 	






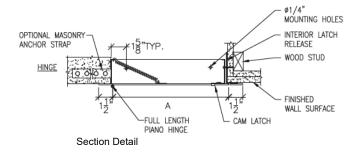

Note: WBFR BASIC access doors are for vertical applications only as code	
allows and no temperature rise is required.	

Model No.	A x B Door Size	Slam Latch	Shipping Weight (lbs) Steel/Stainless
WBFRB-88	8"x8"	1	6
WBFRB-1010	10"x10"	1	9
WBFRB-1212	12"x12"	1	11
WBFRB-1414	14"x14"	1	14
WBFRB-1616	16"x16"	1	17
WBFRB-1818	18"x18"	1	21
WBFRB-2020	20"x20"	1	24
WBFRB-2222	22"x22"	1	28
WBFRB-2230	22"x30"	2	29
WBFRB-2236	22"x36"	2	30
WBFRB-2424	24"x24"	1	26
WBFRB-2430	24"x30"	2	43
WBFRB-2436	24"x36"	2	38
WBFRB-3030	30"x30"	2	50

Rough wall opening = door size + 1/4"



Equipment Ltd. | OTTAWA: (613) 723-6071

TORONTO: (905) 761-6355 Toll Free: (800) 267-8508 BURNABY: (604)-299-4498

VANCOUVER: (604) 420-1131 Toll Free: (800)-667-2138

EDMONTON: (780) 455-3870 Toll Free: (888)-891-1008 CALGARY: (403) 236-5661

MONCTON: (506) 859-7277 Toll Free: (877) 816-3473

www.nationalfire.com

MISSISSAUGA: (905) 565-1385