




National Fire Equipment Ltd.

WICK® 100-4M - 4 STROKE FIRE PUMP

ULTRA LIGHTWEIGHT, MULTI-POSITION HIGH PERFORMANCE FIRE PUMP

- The WICK® 100-4M is powered by a reliable multi-position 4-stroke Honda GX50 engine. Ideal for operating at any angle and for backpack carrying.
- Comes mounted on a backpack style carrying base with cutout handle. Carrying straps optional.
- Integral fuel tank.
- Unique clutch feature for easy starting and water conservation.
- The pump is a detachable, single-stage foam-compatible design for easy maintenance.
- Available with a vertical mount discharge and also available with a base mounted hand primer.
- Meets the emissions standard of US EPA/CARB regulations

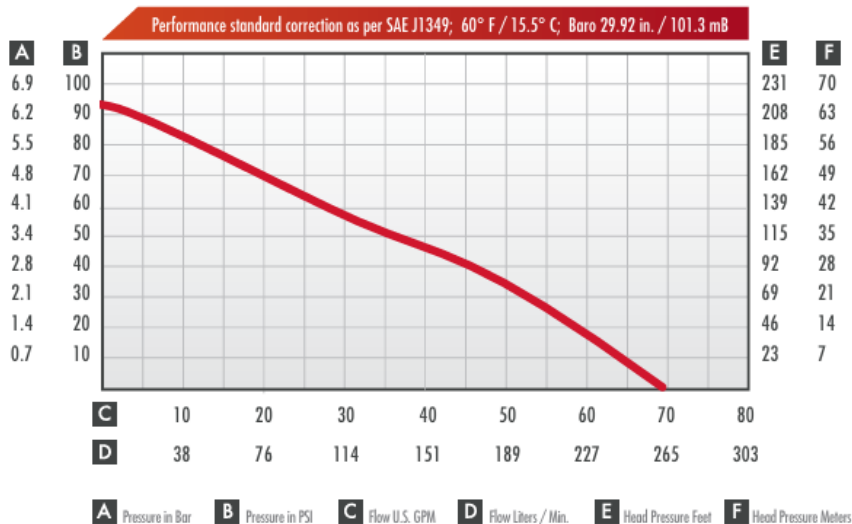

WEIGHT & DIMENSIONS

Length	14.0"	36 cm
Width	11.0"	28 cm
Height	11.75"	30 cm
Weight	17.5 lbs	7.9 kg
Suction	1.5" NPSH	38 mm
Discharge	1.5" NPSH	38 mm

ENGINE

Honda GX50	4 stroke; 48 cc; 2.0* gros Hp @ 7000 RPM	
Clutch Drive		
Fuel Tank Capacity	0.67 Qt. US	0.63 L
Oil Capacity	.14 Qt US	0.13 L

* Mass production engines may vary from this value.
Specifications subject to change without notice



National Fire Equipment Ltd.

WICK® 100-4M - 4 STROKE FIRE PUMP

Bid Specification

- The portable fire pump must have a Honda model GX50, 4 stroke, 48cc engine.
- The 4 stroke pump must be an all position capable of operating or being carried in any position.
- The pump must come standard with a centrifugal clutch.
- The pump must have a detachable (bolt-on) foam-compatible single stage pump end.
- The pump must have an integral fuel tank that provides approximately 40 minutes run time.
- The pump must be equipped with an electronic ignition.
- The pump must not weigh more than 18 lbs / 8.2 kg.
- The pump must have a minimum flow and pressures as shown in the performance chart on the opposite page.
- The pump must meet the emission standards of US EPA/CARB regulations.
- The pump must come standard with a transportable back pack style base.
- The pump must be available with a base mounted hand primer and also available with a vertical mount discharge.
- The single stage pump must be painted red.



	Part#	Description
A	71WICK100-4HMB	WICK100-4M Fire Pump w/ carrying base
B	71WICK100-4HMBV	WICK 100-4M Fire Pump w/ carrying base and vertical mount discharge
C	71WICK100-4HMBP	WICK100-4M Fire Pump w/ carrying base and mounted hand primer



See website for complete listing of accessory and related products