




# National Fire Equipment Ltd.

## WICK® 100M - 2 STROKE FIRE PUMP

### ULTRA LIGHTWEIGHT HIGH PERFORMANCE FIRE PUMP

- For Emergency Rescue Equipment used by forestry and other emergency services
- Powered by a Mitsubishi MEIKI 2-Stroke 47cc engine
- All position .. will operate on any slope
- Unique clutch feature
- Detachable (bolt-on) foam-compatible single-stage pump end
- Integral fuel tank provides approximately 60 minutes run time
- Fuel tank protection guard
- Remote fuel (RFT) model significantly extends operational time
- 40% lower carbon emissions than our previous models
- 25% reduction in fuel consumption
- Optional electronic over-speed protection cut-out switch
- Optional transportable back pack

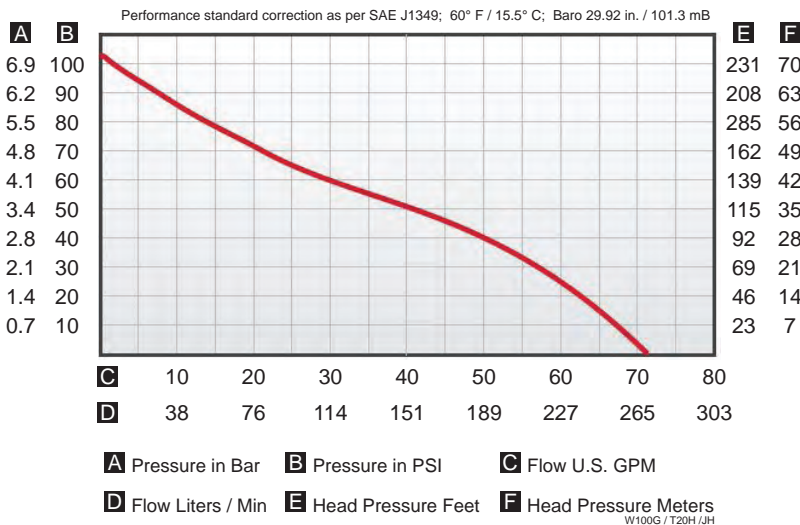

#### WEIGHT & DIMENSIONS

Length	13.5"	34 cm
Width	11.5"	29 cm
Height	12.0"	30.5 cm
Weight	18.6 lbs	8.4 kg
Suction	1.5" NPSH	38 mm
Discharge	1.5" NPSH	38 mm

#### ENGINE

Mitsubishi	Model TLE48	2 stroke; 47cc, 2.4 HP/1.8 KW
Ignition	Electronic	
Clutch Drive		
Fuel Tank Capacity	0.89 Qt US	0.84L

\* Weight shown for standard model. RFT model is 19.9 lbs/9.0 kg  
Specifications subject to change without notice



TORONTO: (905) 761-6355  
Toll Free: (800) 267-8508  
OTTAWA: (613) 723-6071

VANCOUVER: (604) 420-1131  
Toll Free: (800)-667-2138  
BURNABY: (604)-299-4498  
www.nationalfire.com

EDMONTON: (780) 455-3870  
Toll Free: (888)-891-1008  
CALGARY: (403) 236-5661

MONCTON: (506) 859-7277  
Toll Free: (877) 816-3473

MISSISSAUGA: (905) 565-1385



# National Fire Equipment Ltd.

## WICK® 100M - 2 STROKE FIRE PUMP

### Bid Specification

- The portable fire pump must have a 2.4 HP, 47 cc 2-stroke Mitsubishi MEIKI engine
- The pump must be all position, able to operate on any slope
- The pump must be available with a transportable back pack
- The pump must come standard with a centrifugal clutch
- The pump must have a detachable (bolt-on) foam-compatible single-stage pump end
- Must have an impact guard to protect the bottom of the fuel tank
- The pump must also have a remote fuel (RFT) connection.
- The remote fuel options must be available for Chrysler, Mercury or SAE style fuel connections
- When requested, the pump must be equipped with an electronic over-speed protection cut-out switch
- The pump must be equipped with an electronic ignition
- The pump must not weigh more than shown on the previous page
- The pump must have a minimum flow and pressures as shown in the performance chart on the previous page



WICK®100M-RFTCO

PART#	DESCRIPTION
71WICK100M	WICK®100M (Without Fuel Option)
71WICK100M-RFT	WICK®100M Remote Fuel Kit Mercury Model
71WICK100M-RFTCO	WICK®100M Remote Fuel Kit Mercury Model with electronic cut-out switch



OPTIONAL		
A	71W25-HPACK	Back board for carrying
B	70FLPFT5	Fuel Tank .. 6.6 US Gal. / 25 Liters *
C	70FLPFL-M	Mercury fuel line
D	71W11-RFTKITM	Remote fuel kit for WICK 100M fire pump
E	70FLHPPQC	Hand Primer QC
F	70FL15TPPS	Thread protector 1 1/2" / 38mm
G	70FL15DLPS10	Draftlite HP suction hose .. 1 1/2"/38mm x 10'/3M c/w NPSH *
H	70FLFV15PF	Foot Valve / Strainer (Alum) 1 1/2"/38mm Female NPSH *

\*See website for complete listing of accessory and related products



TORONTO: (905) 761-6355  
Toll Free: (800) 267-8508  
OTTAWA: (613) 723-6071

VANCOUVER: (604) 420-1131  
Toll Free: (800)-667-2138  
BURNABY: (604)-299-4498  
www.nationalfire.com

EDMONTON: (780) 455-3870  
Toll Free: (888)-891-1008  
CALGARY: (403) 236-5661

MONCTON: (506) 859-7277  
Toll Free: (877) 816-3473  
MISSISSAUGA: (905) 565-1385