



# National Fire Equipment Ltd.



## MODEL HRS CONTINUOUS FLOW HOSE REELS



The ultimate reel/hose combination for industrial washdown!  
Operates in seconds, packs away in seconds. The 1" diameter PVC coated hose is both rugged and easy to clean. For hose that operates in near freezing temperatures; upgrade to our premium EPDM multipurpose hose. All models come complete with combination fog/straight stream nozzle. Also suitable for special application fire protection (dentention areas, etc). These swing type hose reels have a double 180° rotating hinge which allows hose reels to be mounted in a recessed wall.

Our HRS hose reels are tested and approved by European Standard EN671 (British Standards Institution) and Australian Standards AS1221 (QAS Australia). These approvals require the certification authority to carry out regular inspection of the hose reel manufacturing facility, testing of hose reels and auditing of quality systems.

- Side Plate powder painted finish red
- PVC coated, non collapsible hose
- Threaded Inlet connection
- Outlet connection for hose can be rotated for left and right direction
- Fog/straight stream nozzle
- Waterways made from non ferrous metals; for corrosion protection
- Maximum working pressure: 215 Psi, test pressure: 290 Psi

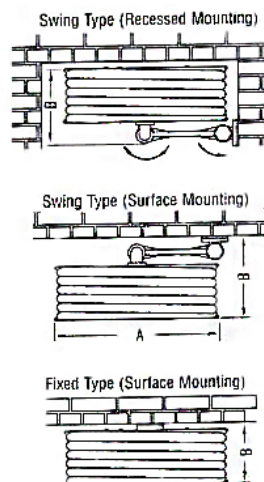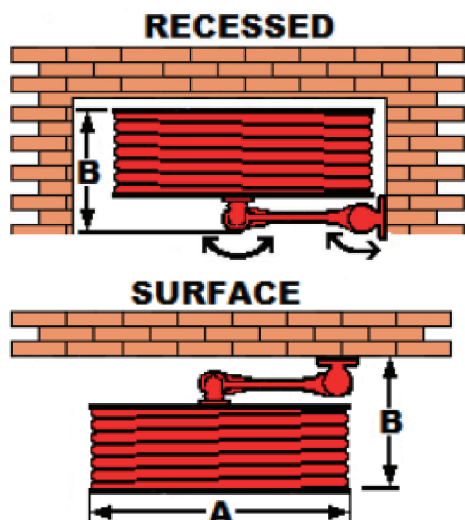

Model No.	Type	Mounting	A Dimension	B Dimension	Capacity
HRS-047	Fixed Manual	Surface	22" (559mm)	12 1/4" (310mm)	1" x 98" (25mm x 30m)
HRS-047 -75	Fixed Manual	Surface	22" (559mm)	9 1/2" (240mm)	1" x 75" (25mm x 23m)
HRS-038-12*	Swing Manual	Rec/Surf	22" (559mm)	11 3/4" (299mm)	1" x 98" (25mm x 30m)
HRS-038-12-75	Swing Manual	Rec/Surf	22" (559mm)	11 3/4" (299mm)	1" x 75" (25mm x 23m)
HRS-061	Swing Auto	Rec/Surf	22" (559mm)	11 3/4" (299mm)	1" x 98" (25mm x 30m)
HRS-061-75	Swing Auto	Rec/Surf	22" (559mm)	11 3/4" (299mm)	1" x 75" (25mm x 23m)

\* HRS-038-12 is our standard stocking reel. All other models are special order and may require minimum quantities.  
Contact customer service for more details.



**National Fire  
Equipment Ltd.**

TORONTO: (905) 761-6355

Toll Free: (800) 267-8508

OTTAWA: (613) 723-6071

VANCOUVER: (604) 420-1131

Toll Free: (800)-667-2138

BURNABY: (604)-299-4498

EDMONTON: (780) 455-3870

Toll Free: (888)-891-1008

CALGARY: (403) 236-5661

MONCTON: (506) 859-7277

Toll Free: (877) 816-3473


MISSISSAUGA: (905) 565-1385

[www.nationalfire.com](http://www.nationalfire.com)



# National Fire Equipment Ltd.

## INSTALLATION INSTRUCTIONS FOR HRS REELS

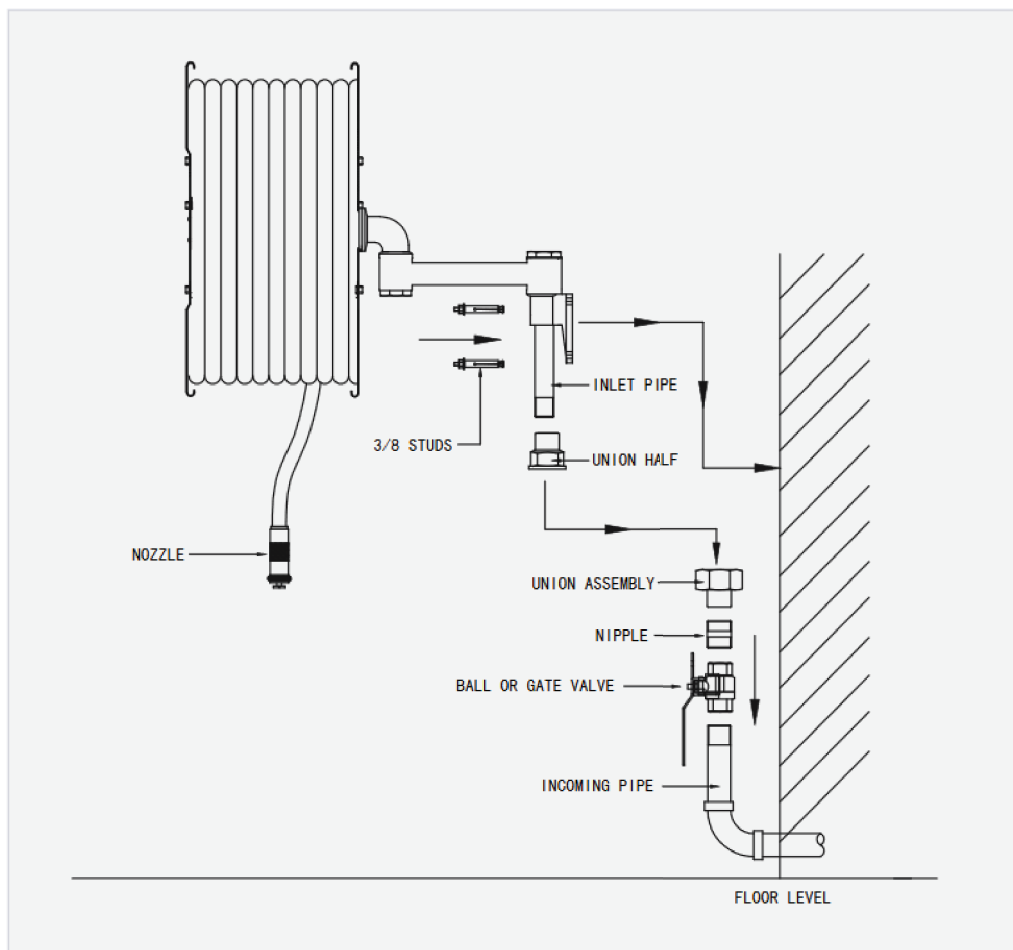

Step 1: Securely mount hose reel bracket to wall using 3/8" studs.

Step 2: Attach valve, nipple and union assembly to the incoming pipe connection\*.

Step 3: Attach the half union into the inlet pipe connection on the reel.

Step 4: Align and secure the union assembly to the corresponding union half.

Step 5: Fill hose reel with water and close nozzle. Check for leakage.

Step 6: Close ball valve and open nozzle to depressurize hose.

\*IMPORTANT: Install with bottom water feed only



National Fire  
Equipment Ltd.

TORONTO: (905) 761-6355  
Toll Free: (800) 267-8508

OTTAWA: (613) 723-6071

VANCOUVER: (604) 420-1131  
Toll Free: (800)-667-2138

BURNABY: (604)-299-4498

EDMONTON: (780) 455-3870  
Toll Free: (888)-891-1008

CALGARY: (403) 236-5661

MONCTON: (506) 859-7277  
Toll Free: (877) 816-3473

MISSISSAUGA: (905) 565-1385

[www.nationalfire.com](http://www.nationalfire.com)